






# CLF10040T-471M-CA

Applications	 Automotive Grade
Feature	 Wire Wound
	 Magnetic Shield
	 Ferrite Core
	 AEC-Q200
Series	CLF-CA Series / CLF10040-CA Type
Status	Production



Size	
Length(L)	10.00mm +/-0.30mm
Width(W)	9.70mm +/-0.30mm
Thickness(T)	3.80mm +/-0.30mm
Recommended Land Pattern (A)	2.50mm Nom.
Recommended Land Pattern (B)	5.60mm Nom.
Recommended Land Pattern (C)	3.20mm Nom.


Electrical Characteristics	
Inductance	470uH +/-20% at 100kHz
Rated Current (L Change) [Typ.]	560mA (10% Down)
Rated Current (Temperature Rise) [Typ.]	440mA (30degC Rise)
DC Resistance [Nom.]	1.21Ω
DC Resistance [Max.]	1.452Ω

Other	
Operating Temp. Range (Including Self-Temp. Rise)	-40 to 105degC
Soldering Method	Reflow, Iron Soldering
AEC Q200	Yes
Packing	Blister (Plastic)Taping [330mm Reel]
Package Quantity	800Pcs Min.
Weight	1.3g


•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.

# CLF10040T-471M-CA


**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

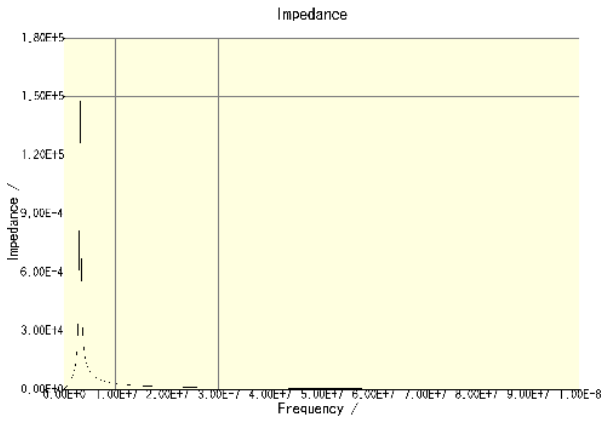


CLF10040T-471M-CA

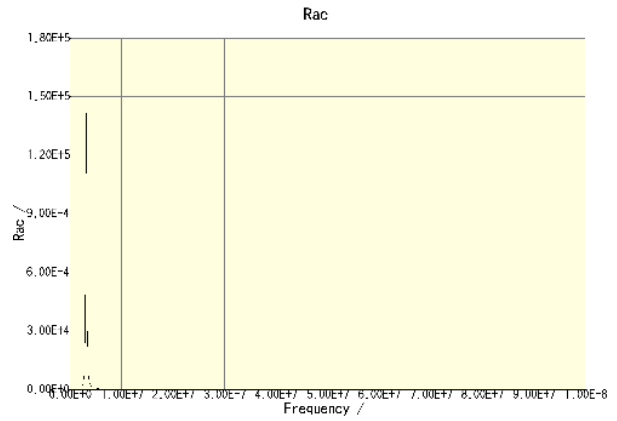

CLF10040T-471M-CA

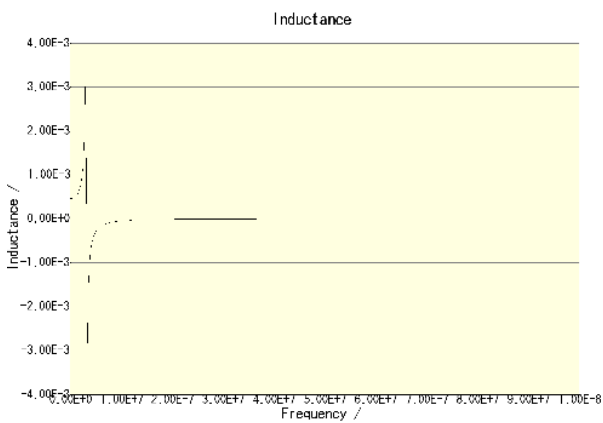

CLF10040T-471M-CA


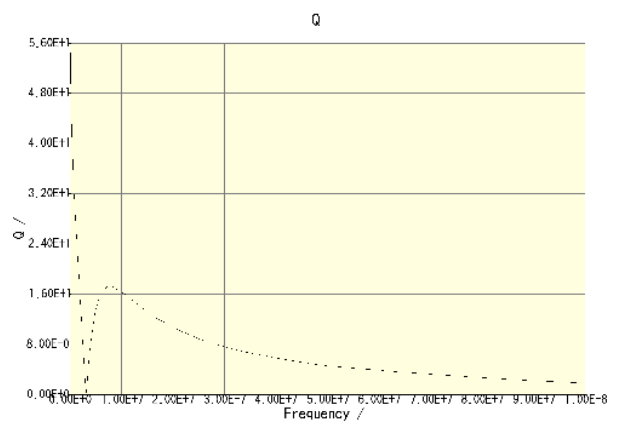


CLF10040T-471M-CA

•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.


# CLF10040T-471M-CA

**Characteristic Graphs** (This is reference data, and does not guarantee the product's characteristics.)

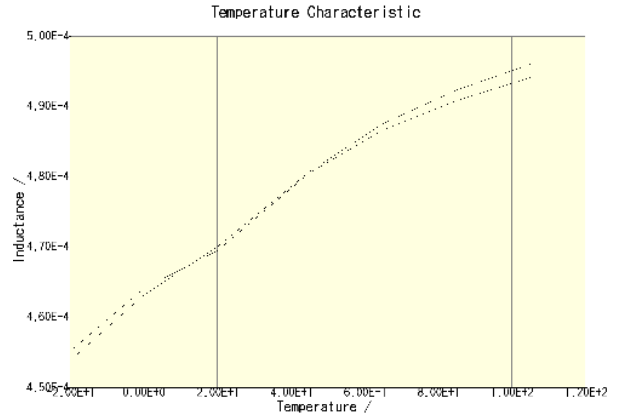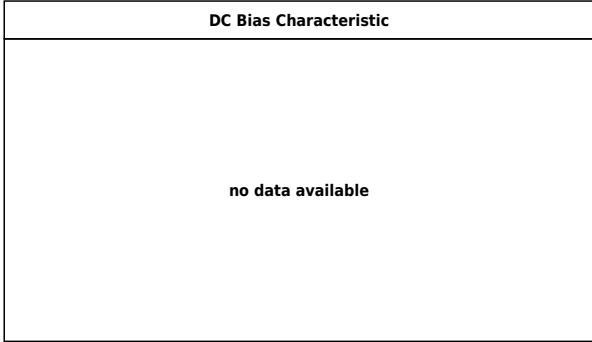

CLF10040T-471M-CA(DC = 0A)

CLF10040T-471M-CA(DC = 0.22A)

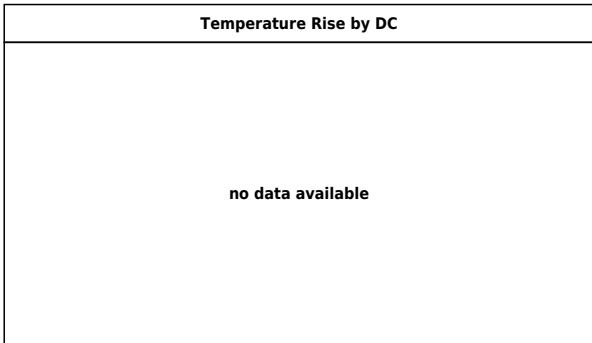

•This PDF document was created based on the data listed on the TDK Corporation website.  
 •All specifications are subject to change without notice.