# **RJ45 1000 Base-T Jack with Magnetic Module and PoE**



## ARJ-146

#### **FEATURES**:


- Compliant with IEEE802.3af standard
- 350uH minimum OCL with 8mA bias current
- High performance for maximum EMI suppression
- 15W, 350mA, 48V PoE Rating
- Enhanced reliability 5000 mating/unmating cycles

## **STANDARD SPECIFICATIONS at 25°C**

Operating temperature range: 0°C to +70°C Storage temperature range: -40°C to +85°C


Parameters	Minimum	Typical	Maximum	Units	Notes
Turn Ratio (±3%)		1CT:1CT			
Inductance	350			uH	100kHz/0.1V@8mA (4 Channels)
Insertion Loss			-1.2	dB	0.1-80MHz
Return Loss	-19				1-30MHz
	-13			٦ŀ	30-60MHz
	-12			dB	60-80MHz
	-10				80-100MHz
Crosstalk		-33+20log(f/50MHz)		dB	1-100MHz
CMR		-30		dB	0.03-100MHz
High Pot	150	00Vrms/0.5mA/1Sec	2		
PoE Rating	1	5W, 350mA, 48V			

#### > MECHANICAL DIMENSIONS

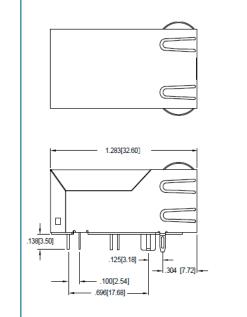

# .531[13.50]

Recommended PCB Layout

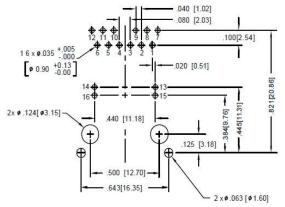

Dimensions: inch[mm] (Unless otherwise specified, tolerances are  $\pm$  0.010[0.25])



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 05.07.13** 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

## **RoHS/RoHS II Compliant**

#### **APPLICATIONS:**


- Designed for most leading PHY IC manufacturers such as Broadcom, Marvell, Microsemi.
- Single port connector for PoE applications
- 1000 Base-T LAN
- NIC, LoM and PC

## **RJ45 1000 Base-T Jack with Magnetic Module and PoE**




## ARJ-146

#### **RoHS/RoHS II Compliant**

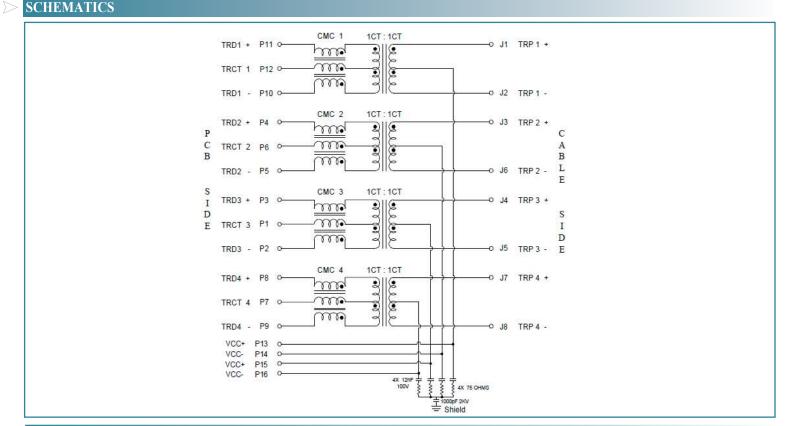

#### **REFLOW PROFILE:**

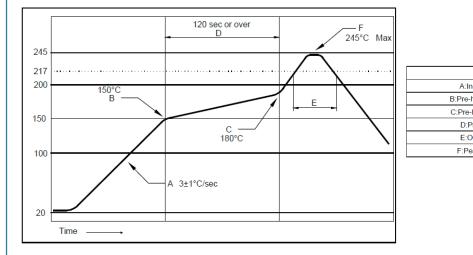

Contents	Soldering Condition		
A:Increasing speed	3±1°C/sec		
Pre-heat starting Temp	150°C		
C:Pre-hedt ending Temp	180°C		
D:Pre-heat interval	120 sec or over		
E:Over 217°C time	60~150 sec		
F:Peak Temperature	245°C Max		

#### Packing: 120pcs/tray

**ATTENTION:** Abracon Corporation's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependant Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon Corporation is required. Please contact Abracon Corporation for more information.

ABRACON IS ISO 9001:2008 CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale **Revised: 05.07.13** 30332 Esperanza, Rancho Santa Margarita, California 92688 tel 949-546-8000 | fax 949-546-8001 | www.abracon.com