



# Lithium Coin Cell - CR 3032

- Reliable energy for your application
- Standard cells and customized packs
- ESD protection
- UL recognized
- Battery Certification Experts



RoHS compliant



Pb free



REACH compliant



Conflict mineral free


## Technical Data Sheet · CR 3032

### SPECIFICATIONS


Nominal Voltage	3V
Jauch part number	250005 (1pc blister)
Nominal Capacity	600 mAh
Standard Load	7.5 kΩ
Standard Current	0.4 mA
Max. Continuous Current	4 mA
Max. Pulse Current	18 mA
Operating Temperature	-20°C to +60°C*
Weight	6.35 gr
Chemistry	Li/MnO <sub>2</sub>
UL1642	MH62838

\* In applications where the battery is exposed to temperatures >60°C, please contact Jauch.


### DIMENSIONS

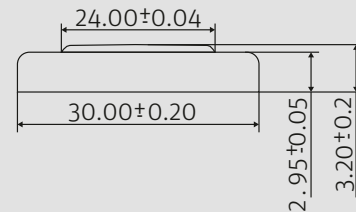


### DISCHARGE CHARACTERISTICS

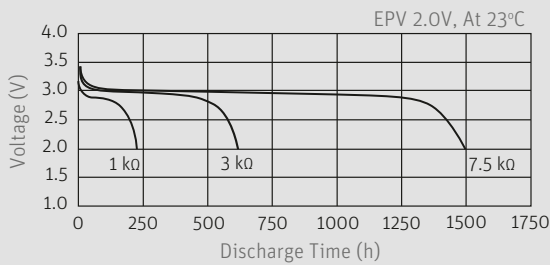


### TEMPERATURE CHARACTERISTICS

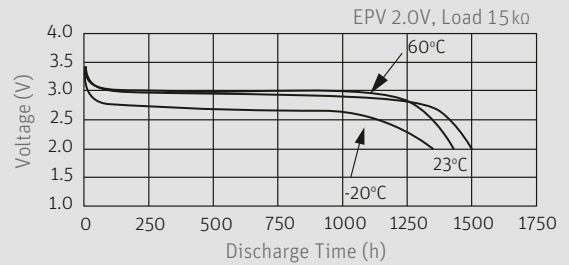

### PULSE DISCHARGE CHARACTERISTICS

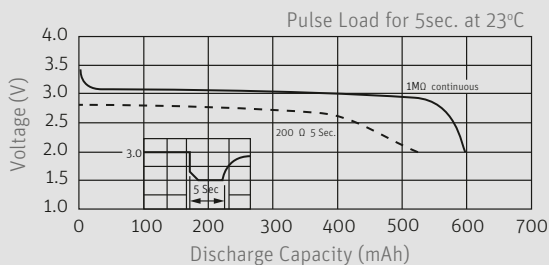

### LOAD VS: CAPACITY

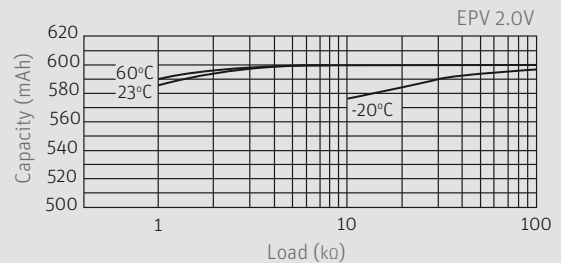

Wide assortment of mounting options, including through hole, surface mount and wire terminals.

Contact Jauch for more information  
batterytechnology@jauch.com