


THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

| REV | DESCRIPTION | DATE | BY |
|-----|-----------------|----------|----|
| A | INITIAL RELEASE | 10/20/22 | YA |
| | | | |
| | | | |

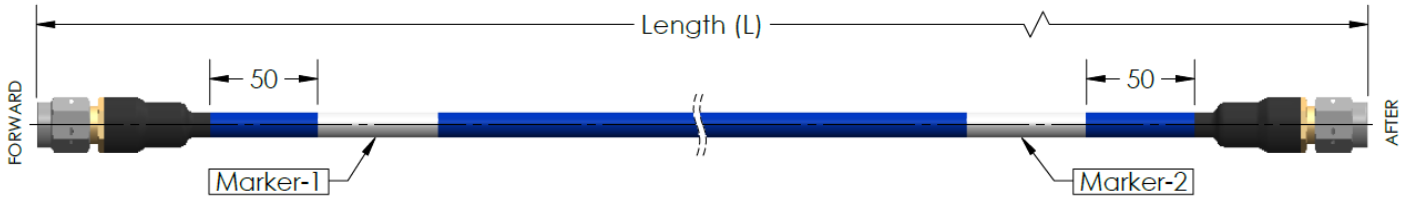

| Dwg. Number | Customer P/N | Times P/N | Length(L) in 'mm' |
|-------------|--------------|------------------|-------------------|
| IE-00408-01 | - | MGS160-SMSM-0.5M | 500 +10/-0 |
| IE-00408-02 | - | MGS160-SMSM-1.0M | 1000 +20/-0 |
| IE-00408-03 | - | MGS160-SMSM-1.5M | 1500 +30/-0 |
| IE-00408-04 | - | MGS160-SMSM-2.0M | 2000 +40/-0 |

1.0 Scope

This drawing documents the construction and performance of Maxgain 160 cable assemblies manufactured by Times Microwave systems.

2.0 Cable Information

- 2.1 Cable to be MAXGAIN 160
- 2.2 Jacket color to be Blue
- 2.3 Jacket material to be FEP
- 2.4 Nominal cable impedance to be 50 ohms
- 2.5 Cable diameter to be 4.04mm [0.159"] (Nominal).


3.0 Connector Information

- 3.1 Forward Connector
 - Type SMA (M) Straight Connector (SP007)
 - Connector Body – Stainless Steel, Gold Plated
 - Center Contact – Beryllium Copper, Gold Plated
- 3.2 After Connector
 - Type SMA (M) Straight Connector (SP007)
 - Connector Body – Stainless Steel, Gold Plated
 - Center Contact – Beryllium Copper, Gold Plated

Unless otherwise specified, dimensions are in MM. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

| Approvals | | |
|-----------|----|----------|
| Drawn | YA | 10/20/22 |
| Checked | | |
| Approved | | |



TIMES MICROWAVE SYSTEMS

www.timesmicrowave.com

MG160 CABLE ASSEMBLY
(Space Assemblies)

| | | |
|-----------|---------------------------|-----------------------------|
| Size A | CAGE CODE 68999 | Drawing No.: IE-00408-XX |
|-----------|---------------------------|-----------------------------|

| | | |
|-----------|----------|---------------|
| Scale: NA | Rev. (A) | Sheet: 1 of 3 |
|-----------|----------|---------------|

THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

| REV | DESCRIPTION | DATE | BY |
|-----|-----------------|----------|----|
| A | INITIAL RELEASE | 10/20/22 | YA |
| | | | |
| | | | |
| | | | |

4.0 Electrical Performance

- 4.1 Frequency range: DC – 22GHz
- 4.2 Insertion loss & VSWR: As per below table,

| Dwg. Number | Max. Insertion Loss in dB | Max. VSWR |
|-------------|---------------------------|-----------|
| | @ 22GHz | @ 22GHz |
| IE-00408-01 | 1.43 | 1.35 |
| IE-00408-02 | 2.53 | 1.35 |
| IE-00408-03 | 3.52 | 1.35 |
| IE-00408-04 | 4.51 | 1.35 |

5.0 Mechanical Performance

- 5.1 Overall Length to be specified length.
- 5.2 Minimum Bend radius is 19mm [0.750"].

6.0 Environmental Performance

- 6.1 Installation Temperature Range (-55°C to +150°C)
- 6.2 Storage Temperature Range (-55°C to +150°C)
- 6.3 Operating Temperature Range (-55°C to +150°C)

7.0 Marking

- 7.1 Markers are to be black text on White Color Marker Sleeve.
- 7.2 Marker Configuration to be:


| Dwg. Number | Marking details | Marker Numbers | Marker Position |
|-------------|---|----------------|------------------------------|
| IE-00408-01 | Times Microwave Systems MGS160-SMSM-0.5M \$\$\$\$\$ | 1 | In center of the cable assy. |
| IE-00408-02 | Times Microwave Systems MGS160-SMSM-1.0M \$\$\$\$\$ | 1 | In center of the cable assy. |
| IE-00408-03 | Times Microwave Systems MGS160-SMSM-1.5M \$\$\$\$\$ | 1 & 2 | At both ends. |
| IE-00408-04 | Times Microwave Systems MGS160-SMSM-2.0M \$\$\$\$\$ | 1 & 2 | At both ends. |

- 7.3 \$\$\$\$\$ = 5-digit Serial Number for this specific configuration.
- 7.4 Register to be Maintained for Serial Number.

Unless otherwise specified, dimensions are in MM. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

| Approvals | | |
|-----------|----|----------|
| Drawn | YA | 10/20/22 |
| Checked | | |
| Approved | | |
| | | |
| | | |

| | | | |
|---|---------------------------|-----------------------------|---------------|
|  | | TIMES MICROWAVE SYSTEMS | |
| | | www.timesmicrowave.com | |
| MG160 CABLE ASSEMBLY (Space Assemblies) | | | |
| Size A | CAGE CODE 68999 | Drawing No.: IE-00408-XX | |
| Scale: NA | | Rev. (A) | Sheet: 2 of 3 |

THE REVISION STATUS OF ALL SHEETS OF THIS DRAWING IS THE SAME AS SHEET 1

| REV | DESCRIPTION | DATE | BY |
|-----|-----------------|----------|----|
| A | INITIAL RELEASE | 10/20/22 | YA |
| | | | |
| | | | |
| | | | |

8.0 NOTES

- 8.1 All Dimensions are in MM.
- 8.2 Assemblies built in Class 100,000 clean room.
- 8.3 Low outgassing materials per ASTM E595.
- 8.4 Unless Otherwise Specified: Tolerance will be,

| Linear Dimension | Tolerance |
|------------------|-----------|
| <500 mm | ±10 mm |
| 500-2000 mm | ±15 mm |
| >2000 mm | ±20 mm |

****Tolerances are not accumulative.**

Unless otherwise specified, dimensions are in MM. Tolerances are applicable when specified.

These drawings and specifications contain proprietary information which is the property of Times Microwave Systems.

| Approvals | | |
|-----------|----|----------|
| Drawn | YA | 10/20/22 |
| Checked | | |
| Approved | | |
| | | |
| | | |



TIMES MICROWAVE SYSTEMS

www.timesmicrowave.com

**MG160 CABLE ASSEMBLY
(Space Assemblies)**

| | | |
|-----------|---------------------------|-----------------------------|
| Size A | CAGE CODE 68999 | Drawing No.: IE-00408-XX |
|-----------|---------------------------|-----------------------------|

Scale: NA

Rev. (A)

Sheet: 3 of 3