


C4ATHBW4900A3LJ

C4AT, Film, Metallized Polypropylene, Power, 9 uF, 5%, 350 VAC, 600 VDC, 70°C, Lead Spacing = 37.5mm

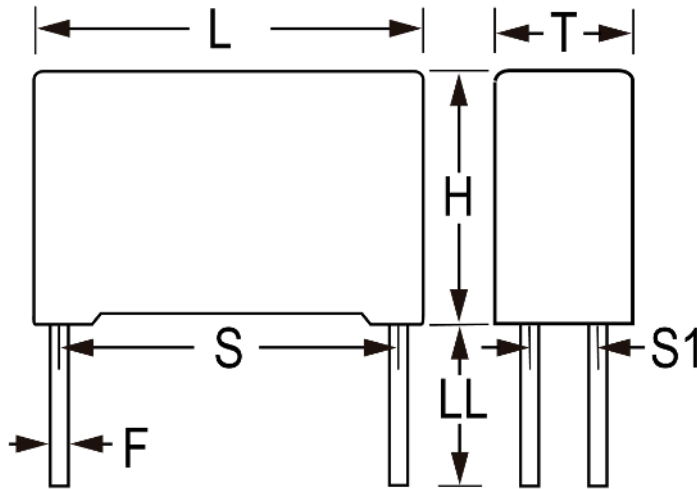

Click [here](#) for the 3D model.

Dimensions

L	42mm -0.7mm
H	45mm -0.7mm
T	30mm -0.7mm
S	37.5mm +/-0.4mm
S1	20.3mm +/-0.4mm
LL	6mm -2mm
F	1.2mm NOM

Packaging Specifications

Packaging	Bulk, Bag
Packaging Quantity	36

General Information

Series	C4AT
Dielectric	Metallized Polypropylene
Style	Radial
Features	Switching
RoHS	Yes
Lead	4 Wire Leads
AEC-Q200	No
Component Weight	72.5 g

Specifications

Capacitance	9 uF
Capacitance Tolerance	5%
Voltage AC	350 VAC
Voltage DC	600 VDC
Temperature Range	-40/+85°C
Rated Temperature	70°C
Dissipation Factor	0.05%
Max dV/dt	70 V/us
Resistance	1.9 mOhms (100kHz)
Ripple Current	29 Amps (100kHz 70C), 632 Amps (Peak)