

Thermally-Enhanced High Power RF LDMOS FET 50 W, 28 V, 2300 – 2400 MHz

Description


The PTAC240502FC is a 47-watt LDMOS FET with an asymmetrical design intended for use in multi-standard cellular power amplifier applications in the 2300 to 2400 MHz frequency band. Features include dual-path design, input matching, high gain and thermally-enhanced package with earless flanges. Manufactured with Infineon's advanced LDMOS process, this device provides excellent thermal performance and superior reliability.

PTAC240502FC
Package H-37248-4



Features

- Input matched
- Asymmetric Doherty design
 - Main: P1dB = 17 W Typ
 - Peak: P1dB = 33 W Typ
- Typical Pulsed CW performance, 2350 MHz, 28 V, 160 μ s pulse width, 10% duty cycle, Doherty Configuration
 - Output power at P1dB = 45.7 W
 - Efficiency = 46.2%
 - Gain = 14.6 dB
- Typical single-carrier WCDMA performance, 2350 MHz, 28 V, 8.4 dB PAR @ 0.01% CCDF
 - Output power = 8.91 W
 - Efficiency = 44.2%
 - Gain = 14.2 dB
 - ACPR = -31 dBc @ 5 MHz
- Capable of handling 10:1 VSWR @ 28 V, 50 W (CW) output power
- Integrated ESD protection : Human Body Model, Class 1B (per JESD22-A114)
- Low thermal resistance
- Pb-free and RoHS compliant

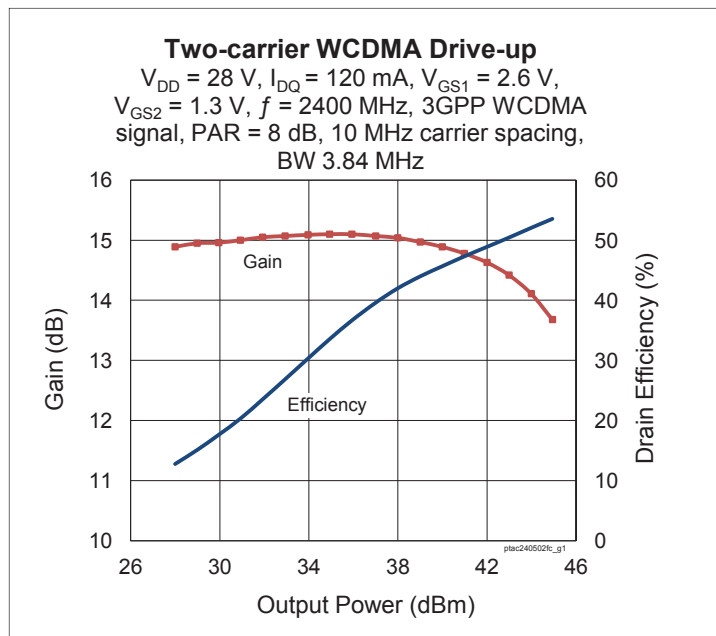

RF Characteristics

Two-carrier WCDMA Specifications (tested in Infineon Doherty test fixture)

$V_{DD} = 28$ V, $I_{DQ} = 120$ mA, $P_{OUT} = 10$ W avg, $V_{GS2} = 1.3$ V, $f_1 = 2345$ MHz, $f_2 = 2355$ MHz, 3GPP signal, channel bandwidth = 3.84 MHz, peak/average = 8 dB @ 0.01% CCDF

Characteristic	Symbol	Min	Typ	Max	Unit
Linear Gain	G_{ps}	13	14.3	—	dB
Drain Efficiency	η_D	41	44	—	%
Intermodulation Distortion	IMD	—	-33	-25	dBc

All published data at $T_{CASE} = 25^\circ\text{C}$ unless otherwise indicated

ESD: Electrostatic discharge sensitive device—observe handling precautions!

DC Characteristics

Characteristic	Conditions	Symbol	Min	Typ	Max	Unit
Drain-Source Breakdown Voltage	$V_{GS} = 0\text{ V}$, $I_{DS} = 10\text{ mA}$	$V_{(BR)DSS}$	65	—	—	V
Drain Leakage Current	$V_{DS} = 28\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	1	μA
	$V_{DS} = 63\text{ V}$, $V_{GS} = 0\text{ V}$	I_{DSS}	—	—	10	μA
On-State Resistance (main)	$V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.4	—	Ω
	(peak) $V_{GS} = 10\text{ V}$, $V_{DS} = 0.1\text{ V}$	$R_{DS(on)}$	—	0.2	—	Ω
Operating Gate Voltage (main)	$V_{DS} = 28\text{ V}$, $I_{DQ} = 120\text{ mA}$	V_{GS}	2.6	2.7	2.8	V
	(peak) $V_{DS} = 28\text{ V}$, $I_{DQ} = 0\text{ mA}$	V_{GS}	1.2	1.3	1.5	V
Gate Leakage Current	$V_{GS} = 10\text{ V}$, $V_{DS} = 0\text{ V}$	I_{GSS}	—	—	1	μA





Maximum Ratings


Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DSS}	65	V
Gate-Source Voltage	V_{GS}	-6 to +10	V
Operating Voltage	V_{DD}	0 to +32	V
Junction Temperature	T_J	225	$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-65 to +150	$^{\circ}\text{C}$
Thermal Resistance ($T_{CASE} = 60^{\circ}\text{C}$, 50 W CW)	$R_{\theta JC}$	1.29	$^{\circ}\text{C/W}$

Ordering Information

Type and Version	Order Code	Package Description	Shipping
PTAC240502FC V1	PTAC240502FCV1XWSA1	H-37248-4, earless flange	Tray
PTAC240502FC V1 R250	PTAC240502FCV1R250XTMA1	H-37248-4, earless flange	Tape & Reel, 250 pcs

Typical Performance (data taken in a production test fixture)

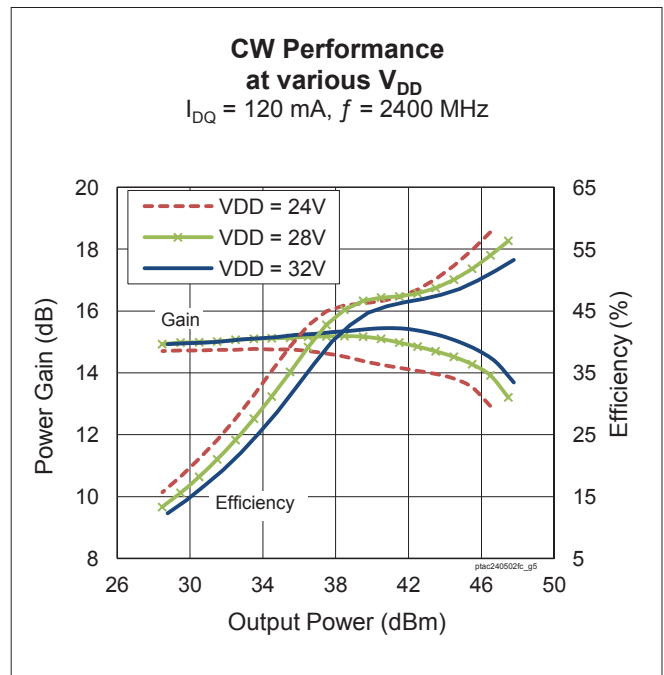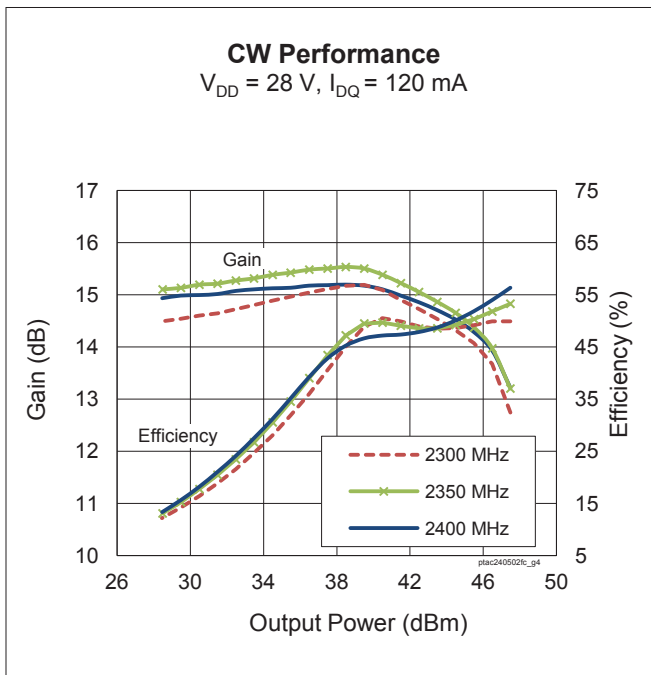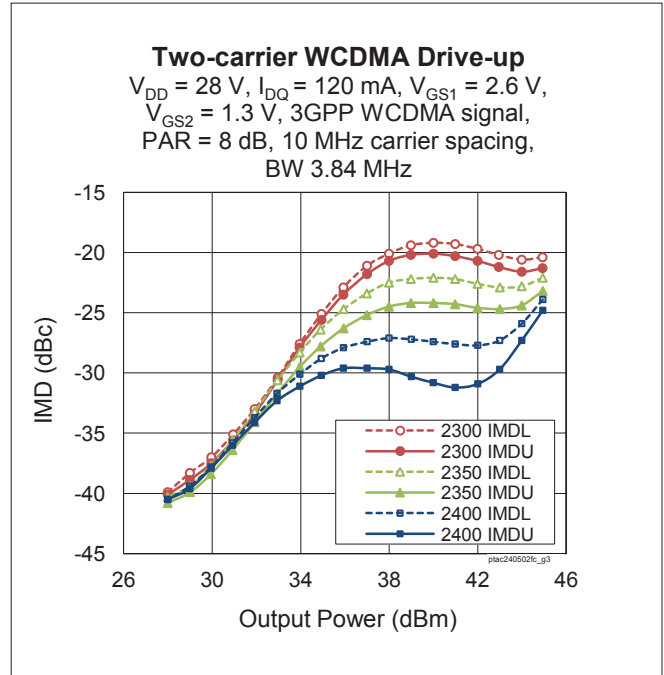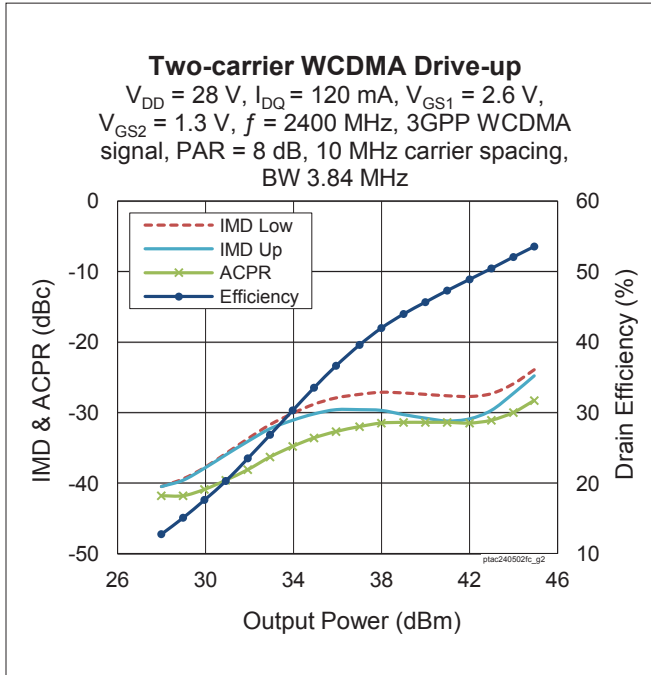

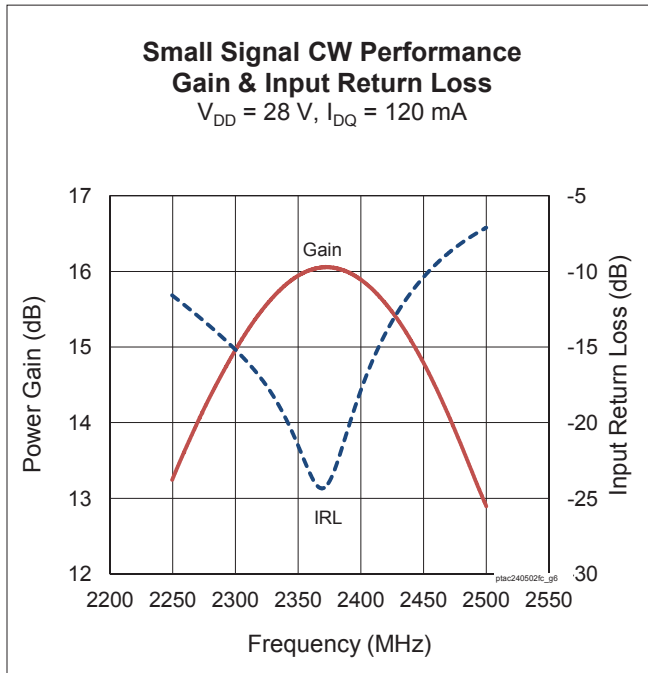
Typical Performance (cont.)

Load Pull Performance
Main Side Load Pull Performance – Pulsed CW signal: 160 μs , 10% duty cycle, 28 V, 114 mA

		P1dB									
		Max Output Power					Max PAE				
Freq [MHz]	Zs [Ω]	ZI [Ω]	Gain [dB]	POUT [dBm]	POUT [W]	PAE [%]	ZI [Ω]	Gain [dB]	POUT [dBm]	POUT [W]	PAE [%]
2300	10-j31	9.4-j11.6	20.96	42.89	19.45	53.2	4.7-j8.3	22.8	41.03	12.68	61.5
2350	12.7-j35	9.7-j12.2	20.7	42.83	19.19	52.7	5.1-j9.4	22.4	41.34	13.61	62.1
2400	16.2-j38	9.31-j12.6	20.8	42.65	18.41	52.6	5.2-j10.2	22.2	41.45	13.96	61.3

Peak Side Load Pull Performance – Pulsed CW signal: 160 μs , 10% duty cycle, 28 V, 252 mA

		P1dB									
		Max Output Power					Max PAE				
Freq [MHz]	Zs [Ω]	ZI [Ω]	Gain [dB]	POUT [dBm]	POUT [W]	PAE [%]	ZI [Ω]	Gain [dB]	POUT [dBm]	POUT [W]	PAE [%]
2300	5.6-j22	3.0-j7.0	18.2	46.50	44.67	52.1	2.2-j5.8	20.5	45.20	33.11	56.9
2350	6.7-j25	2.9-j7.9	17.4	46.46	44.26	48.5	2.2-j5.9	21.1	44.91	30.97	55.9
2400	9.7-j29	3.3-j7.9	17.9	46.62	45.92	49.6	2.2-j6.2	20.8	45.31	33.96	57.2

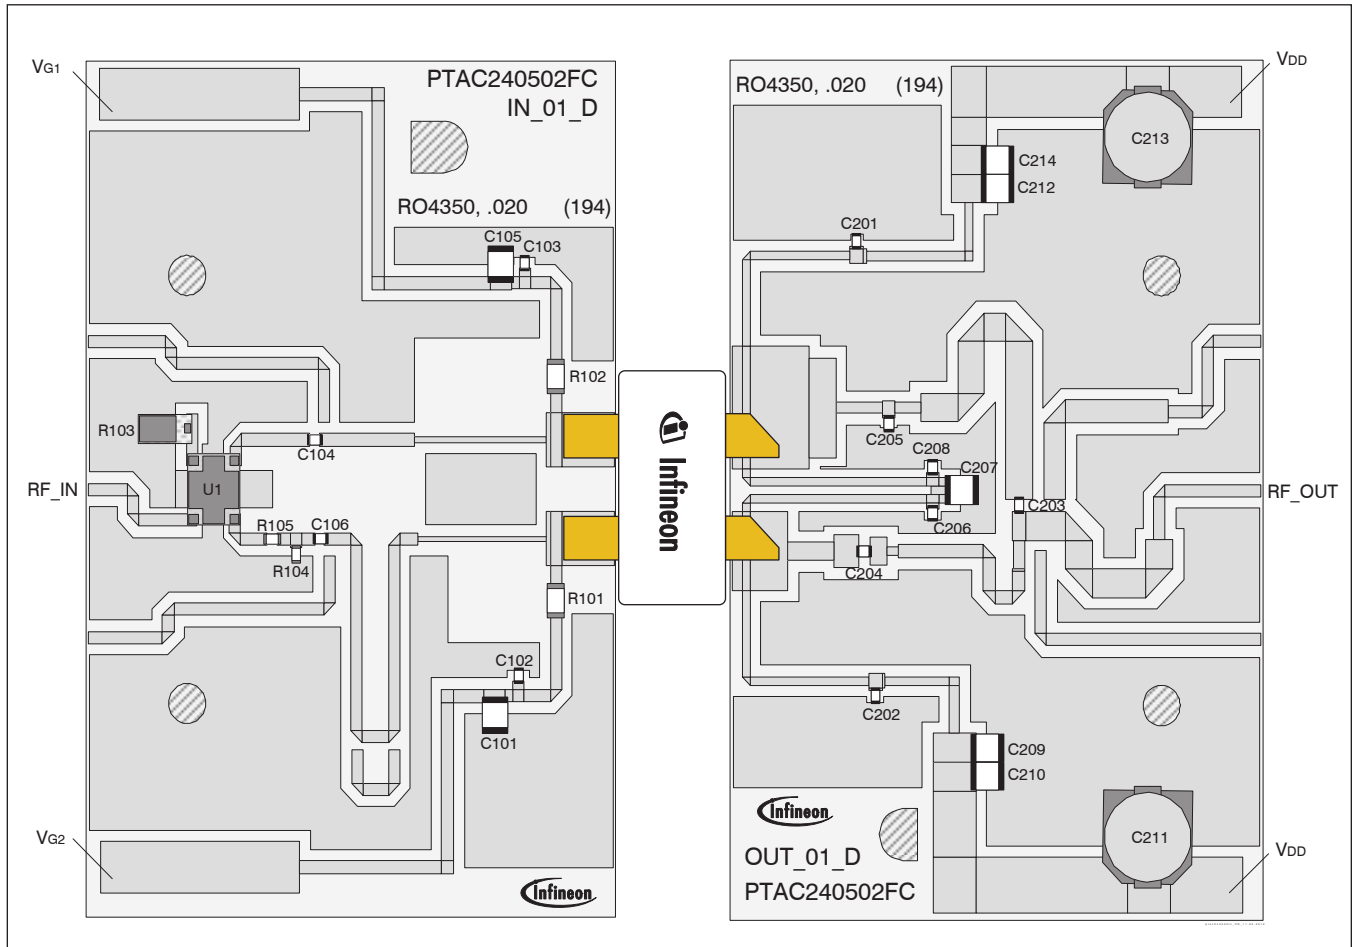Reference Circuit , 2300 – 2400 MHz



Reference circuit assembly diagram (not to scale)

Reference Circuit (cont.)


Reference Circuit Assembly

DUT	PTAC240502FC V1
Test Fixture Part No.	LTA/PTAC240502FC V1
PCB	Rogers 4350, 0.508 mm [0.020"] thick, 2 oz. copper, $\epsilon_r = 3.66$, $f = 2300 - 2400$ MHz
Find Gerber files for this test fixture on the Infineon Web site at http://www.infineon.com/rfpower	

Components Information


Component	Description	Suggested Manufacturer	P/N
Input			
C101, C105	Capacitor, 4.7 μ F	Murata Electronics North America	GRM32ER71H475KA88L
C102, C103, C104, C106	Capacitor, 18 pF	ATC	ATC800A180JT250T
R101, R102	Resistor, 10 Ω	Panasonic Electronic Components	ERJ-8GEYJ100V
R103	Resistor, 50 Ω	Anaren	060120A15Z50
R104	Resistor, 300 Ω	Venkel	CR0603-16W-3010FB
R105	Resistor, 12.1 Ω	Venkel	CR0603-16W-12R1FB
U1	Directional coupler	Anaren	X3C25P1-05S
Output			
C201, C202, C203, C204, C206, C208	Capacitor, 18 pF	ATC	ATC800A180JT250T
C205	Capacitor, 0.5 pF	ATC	ATC800A180JT250T
C207, C210, C214	Capacitor, 4.71 μ F	Murata Electronics North America	GRM32ER71H475KA88L
C209, C212	Capacitor, 10 μ F	Taiyo Yuden	UMK325C7106MM-T
C211, C213	Capacitor, 100 μ F	Panasonic Electronic Components	EEE-FP1V101AP

Pinout Diagram (top view)

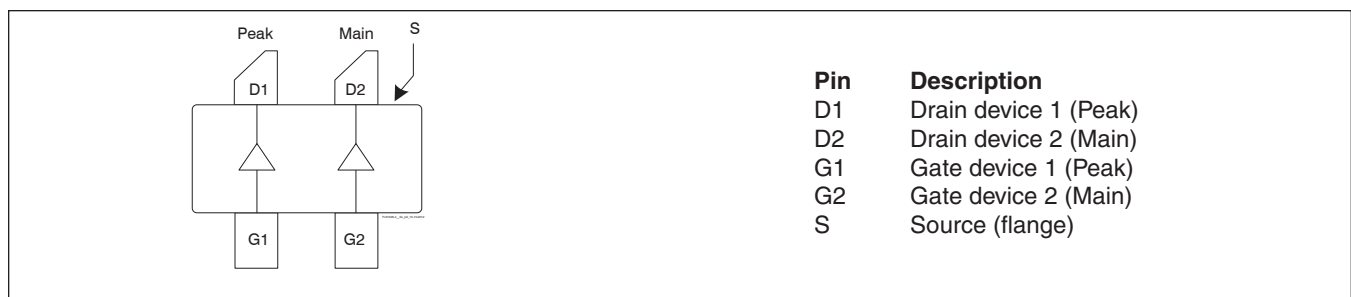

Lead connections for PTAC240502FC

Package Outline Specifications

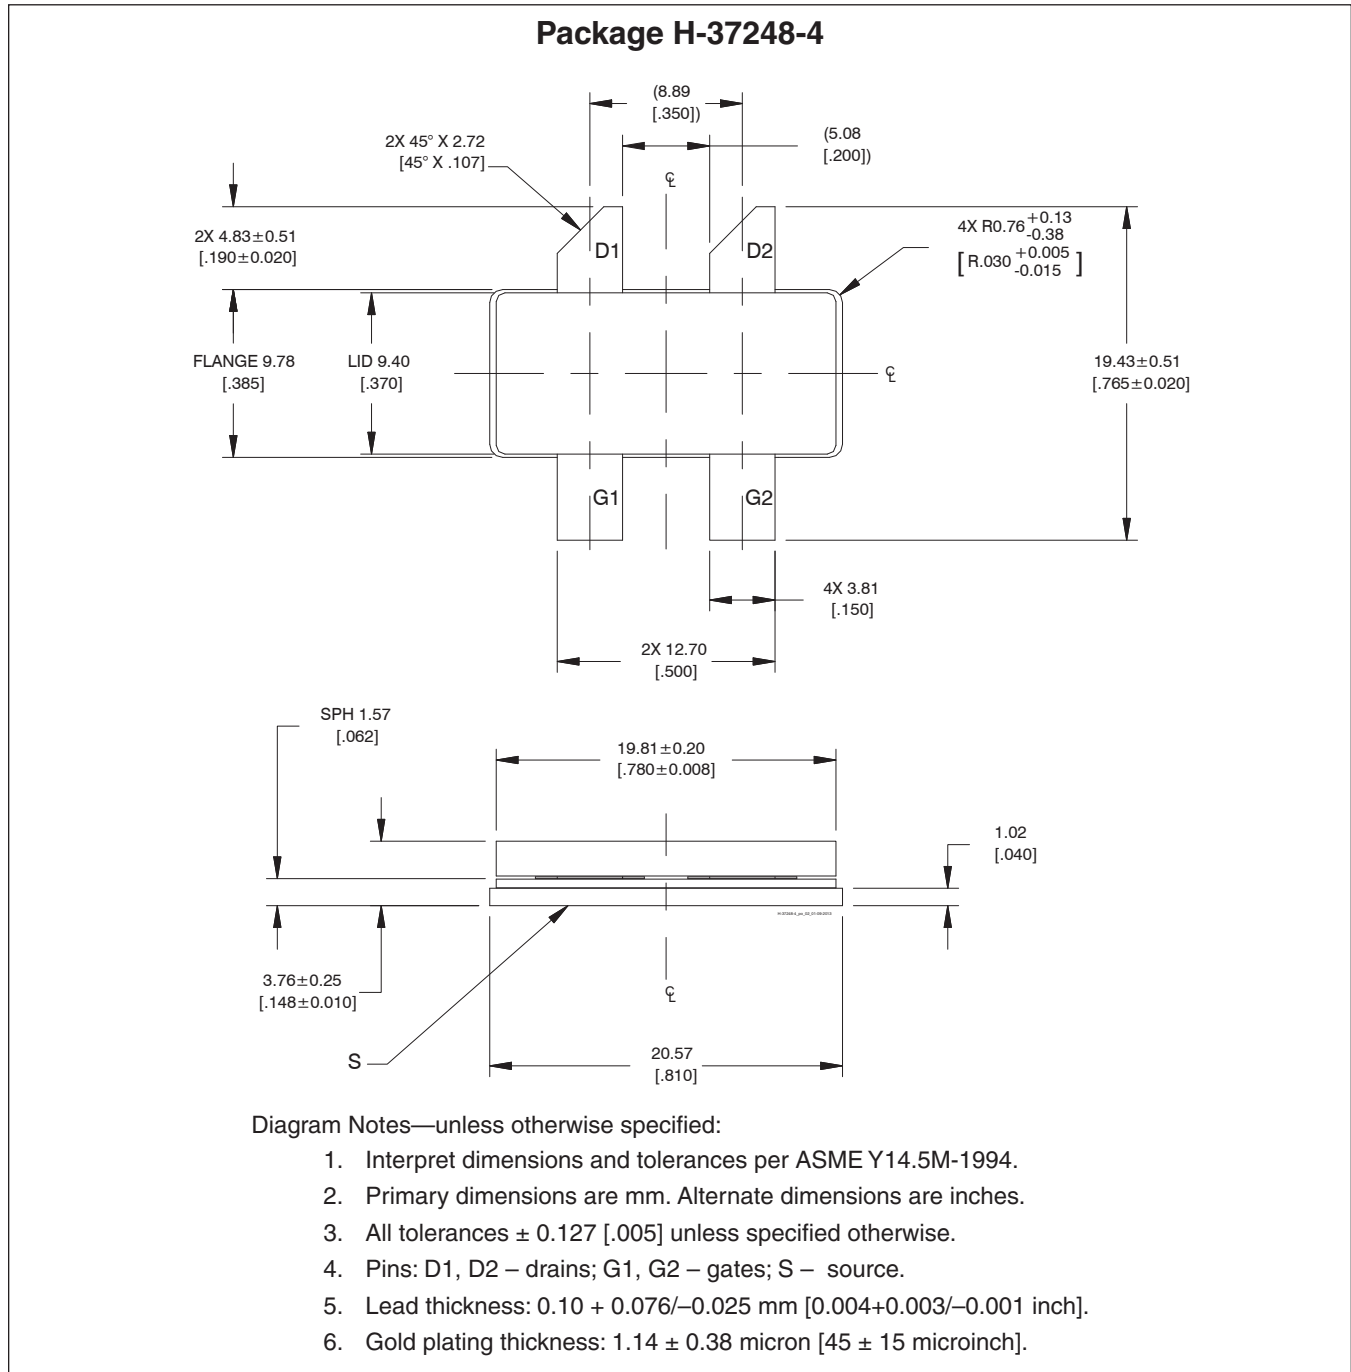

Find the latest and most complete information about products and packaging at the Infineon Internet page <http://www.infineon.com/rfpower>

Revision History


Revision	Date	Data Sheet Type	Page	Subjects (major changes since last revision)
01	2013-07-16	Advance	All	Data Sheet reflects advance specification for product development
02	2013-11-13	Production	All	Data Sheet reflects released product specification
02.1	2013-11-27	Production	1	Revised ESD classification
02.2	2014-05-14	Production	2	Revised junction temperature in Maximum Ratings table

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?
Your feedback will help us to continuously improve the quality of this document.
Please send your proposal (including a reference to this document) to:

highpowerRF@infineon.com

To request other information, contact us at:
+1 877 465 3667 (1-877-GO-LDMOS) USA
or +1 408 776 0600 International



Edition 2014-05-14

**Published by
Infineon Technologies AG
85579 Neubiberg, Germany**

**© 2014 Infineon Technologies AG
All Rights Reserved.**

Legal Disclaimer

The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. With respect to any examples or hints given herein, any typical values stated herein and/or any information regarding the application of the device, Infineon Technologies hereby disclaims any and all warranties and liabilities of any kind, including without limitation, warranties of non-infringement of intellectual property rights of any third party.

Information

For further information on technology, delivery terms and conditions and prices, please contact the nearest Infineon Technologies Office (www.infineon.com/rfpower).

Warnings

Due to technical requirements, components may contain dangerous substances. For information on the types in question, please contact the nearest Infineon Technologies Office.

Infineon Technologies components may be used in life-support devices or systems only with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.