

SAC-12P-15,0-PUR/M16FR - Master cable



1623522

<https://www.phoenixcontact.com/us/products/1623522>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Master cable, application: Sensor/actuator box, number of slots: 8, number of positions: 12, status display: No, Alternative product in accordance with RoHS II without Exemption 6c (Pb <0.1%) item no.: 1260744

Commercial data

Item number	1623522
Packing unit	1 pc
Minimum order quantity	10 pc
Note	Made to order (non-returnable)
Sales key	AB37
Product key	ABRDAB
GTIN	4055626166797
Weight per piece (including packing)	1,721 g
Weight per piece (excluding packing)	1,430 g
Customs tariff number	85444290
Country of origin	DE

SAC-12P-15,0-PUR/M16FR - Master cable



1623522

<https://www.phoenixcontact.com/us/products/1623522>

Technical data

Product properties

Product type	Master cable, assembled
Number of positions	12
Application	Sensor/actuator box
Number of slots	8

Electrical properties

Nominal voltage U_N	48 V AC
	60 V DC

Signaling

Status display present	No
------------------------	----

Material specifications

Seal material	NBR
---------------	-----

Connector

Connection 1


Head design	Socket
Head cable outlet	angled
Head thread type	M16

Connection 2

Head design	free cable end
-------------	----------------

Cable/line

PUR/PVC black [PUR]

Dimensional drawing	
Cable weight	92 kg/km
UL AWM Style	20549
Number of positions	10
Shielded	no
Cable type	PUR/PVC black [PUR]
Conductor structure signal line	19x 0.15 mm

SAC-12P-15,0-PUR/M16FR - Master cable



1623522

<https://www.phoenixcontact.com/us/products/1623522>

AWG signal line	22
Conductor cross section	8x 0.34 mm ² (Signal line)
	2x 0.75 mm ² (power line)
Wire diameter incl. insulation	1.3 mm ±0.1 mm (Signal line)
	1.8 mm ±0.1 mm (power line)
External cable diameter	7.9 mm ±0.2 mm
Outer sheath, material	PUR
External sheath, color	black RAL 9005
Conductor material	Bare Cu litz wires
Material wire insulation	PVC
Single wire, color	brown, blue, white, green, yellow, gray, pink, red, black, violet
Inner sheath thickness	≥ 0.15 mm
Thickness, outer sheath	≥ 0.38 mm
Overall twist	Wires twisted in layers
Nominal voltage, cable	300 V
Test voltage	2000 V
Minimum bending radius, fixed installation	7.5 x D
Minimum bending radius, flexible installation	10 x D
Max. bending cycles	1500000
Flame resistance	DIN EN 50265
Resistance to oil	according to VDE 0472 Part 803
Other resistance	Highly resistant to acids, alkaline solutions and solvents
Special properties	Silicone-free
Ambient temperature (operation)	-40 °C ... 90 °C (cable, fixed installation)
	-5 °C ... 80 °C (Cable, flexible installation)
	80 °C (in acc. with UL)

Environmental and real-life conditions

Ambient conditions

Degree of protection	IP67
Ambient temperature (operation)	-25 °C ... 90 °C (Plug / socket)
	-40 °C ... 90 °C (cable, fixed installation)

Mounting

Connection method	Fixed connection
-------------------	------------------

SAC-12P-15,0-PUR/M16FR - Master cable




1623522

<https://www.phoenixcontact.com/us/products/1623522>

Drawings

Circuit diagram

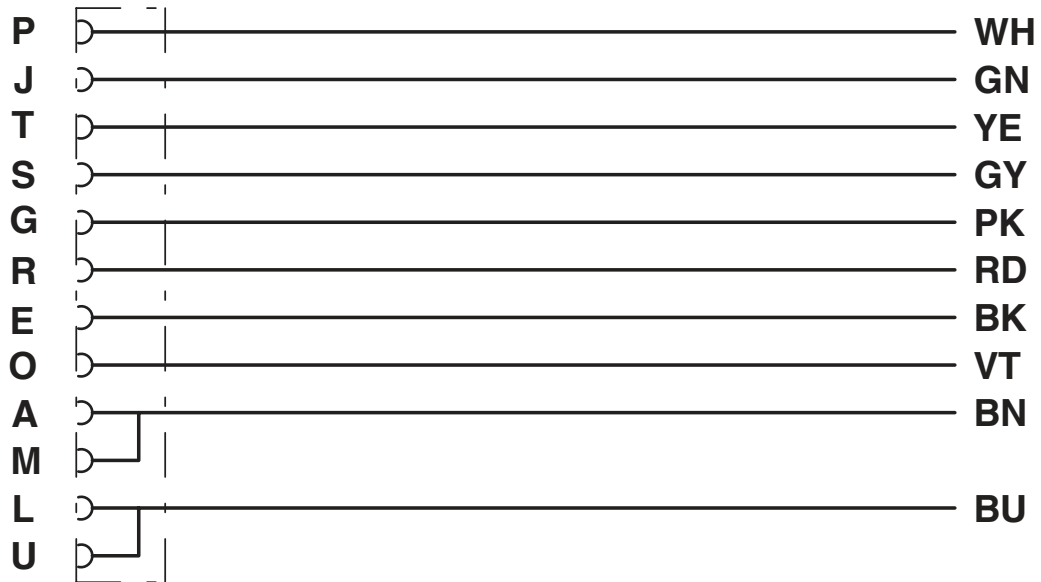

SAC-12P-15,0-PUR/M16FR - Master cable



1623522

<https://www.phoenixcontact.com/us/products/1623522>

Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/1623522>



EAC

Approval ID: 19060508

SAC-12P-15,0-PUR/M16FR - Master cable



1623522

<https://www.phoenixcontact.com/us/products/1623522>

Classifications

ECLASS

ECLASS-11.0	27060311
ECLASS-12.0	27060311
ECLASS-13.0	27060311

ETIM

ETIM 8.0	EC001855
----------	----------

UNSPSC

UNSPSC 21.0	26121600
-------------	----------

SAC-12P-15,0-PUR/M16FR - Master cable



1623522

<https://www.phoenixcontact.com/us/products/1623522>

Environmental product compliance

REACH SVHC	Lead 7439-92-1
China RoHS	Environmentally Friendly Use Period = 50 years
	For information on hazardous substances, refer to the manufacturer's declaration available under "Downloads"

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA
586 Fulling Mill Road
Middletown, PA 17057, United States
(+717) 944-1300
info@phoenixcon.com