
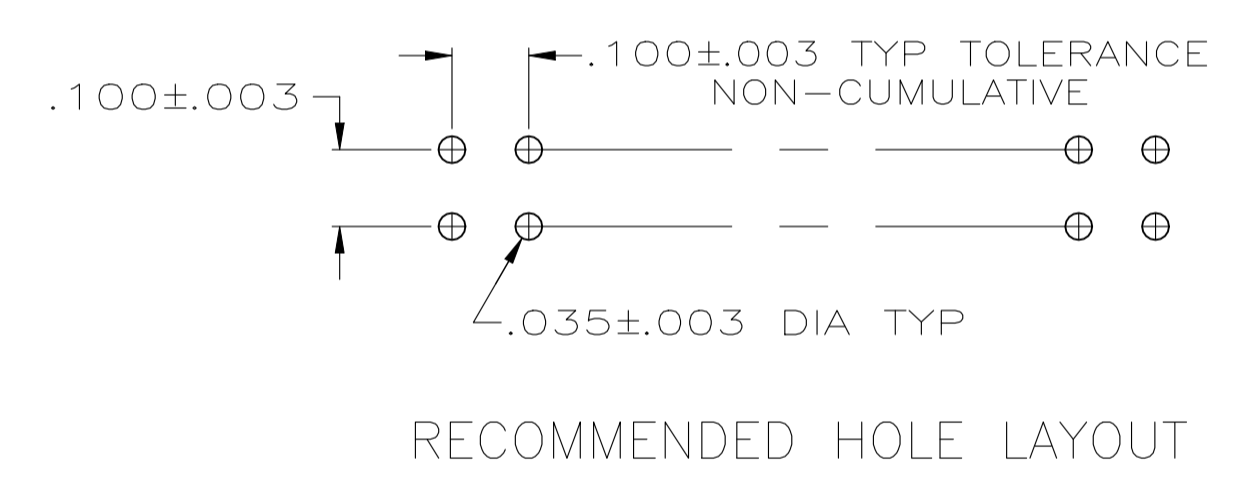


REVISIONS					
P	LTR	DESCRIPTION	DATE	DN	APVD
G3	REVISED PER	ECN-22-164449	17JUL2022	RK	MF

- ① THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST AND HOUSING
- ② POINT OF MEASUREMENT FOR PLATING THICKNESS.
- 3 ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- ④ BREAKAWY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- ⑤ .000015 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN-LEAD ON THE SOLDER TAIL, .000050 NICKEL ALL OVER.
- ⑥ .000015 GOLD IN THE CONTACT AREA, .000100-.000200 MATTE TIN ON THE SOLDER TAIL, .000050 NICKEL ALL OVER.
- ⑦ MATERIAL:  
HOUSING- FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK  
POSTS- COPPER ALLOY
- ⑧ HIGH TEMPERATURE CONFIGURATION.
- ⑨ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

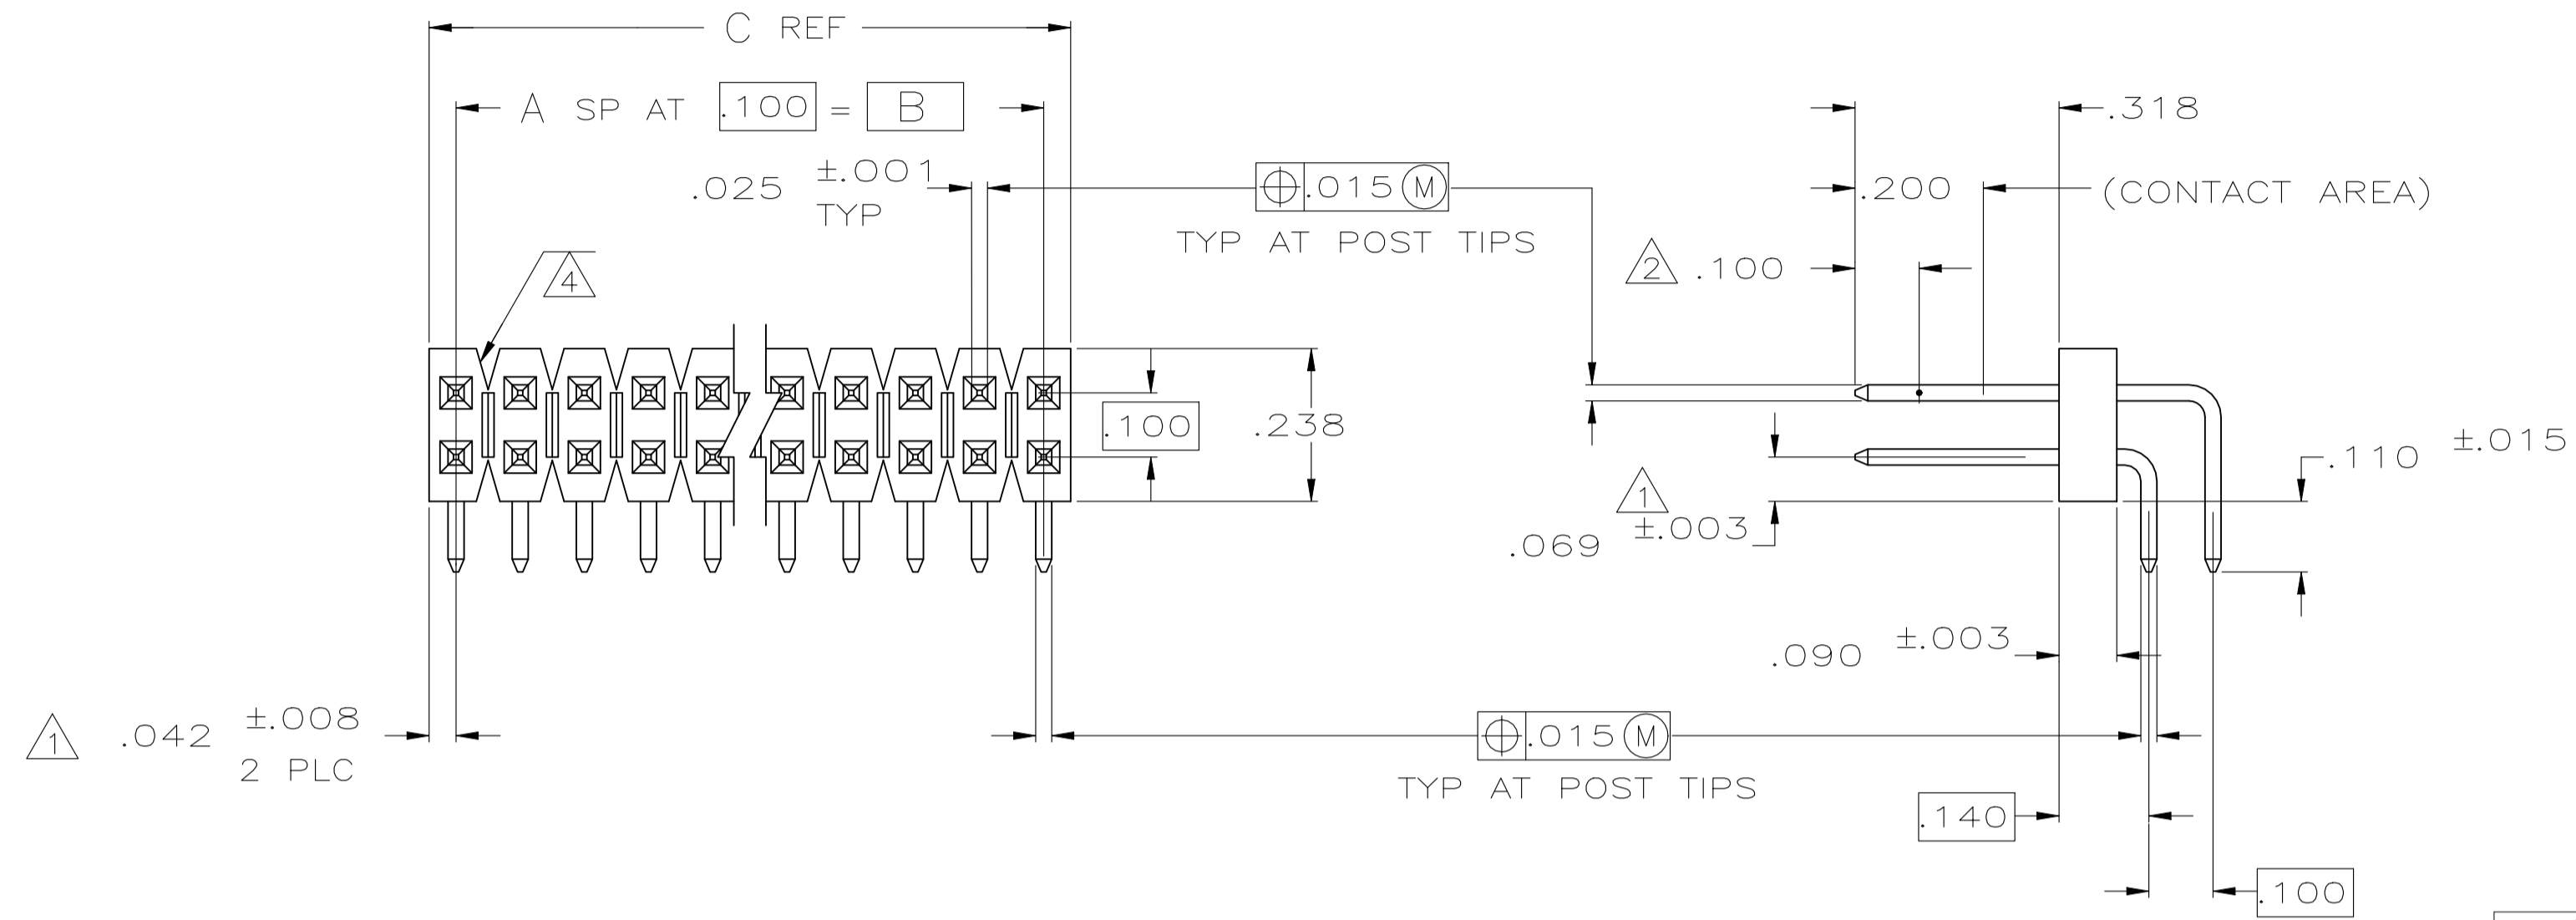

REMARKS	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER
⑧	⑥	3.984	3.900	39	80	9-102975-0
⑧	⑥	3.884	3.800	38	78	8-102975-9
⑧	⑥	3.784	3.700	37	76	8-102975-8
⑧	⑥	3.684	3.600	36	74	8-102975-7
⑧	⑥	3.584	3.500	35	72	8-102975-6
⑧	⑥	3.484	3.400	34	70	8-102975-5
⑧	⑥	3.384	3.300	33	68	8-102975-4
⑧	⑥	3.284	3.200	32	66	8-102975-3
⑧	⑥	3.184	3.100	31	64	8-102975-2
⑧	⑥	3.084	3.000	30	62	8-102975-1
⑧	⑥	2.984	2.900	29	60	8-102975-0
⑧	⑥	2.884	2.800	28	58	7-102975-9
⑧	⑥	2.784	2.700	27	56	7-102975-8
⑧	⑥	2.684	2.600	26	54	7-102975-7
⑧	⑥	2.584	2.500	25	52	7-102975-6
⑧	⑥	2.484	2.400	24	50	7-102975-5
⑧	⑥	2.384	2.300	23	48	7-102975-4
⑧	⑥	2.284	2.200	22	46	7-102975-3
⑧	⑥	2.184	2.100	21	44	7-102975-2
⑧	⑥	2.084	2.000	20	42	7-102975-1
⑧	⑥	1.984	1.900	19	40	7-102975-0
⑧	⑥	1.884	1.800	18	38	6-102975-9
⑧	⑥	1.784	1.700	17	36	6-102975-8
⑧	⑥	1.684	1.600	16	34	6-102975-7
⑧	⑥	1.584	1.500	15	32	6-102975-6
⑧	⑥	1.484	1.400	14	30	6-102975-5
⑧	⑥	1.384	1.300	13	28	6-102975-4
⑧	⑥	1.284	1.200	12	26	6-102975-3
⑧	⑥	1.184	1.100	11	24	6-102975-2
⑧	⑥	1.084	1.000	10	22	6-102975-1
⑧	⑥	.984	.900	9	20	6-102975-0
⑧	⑥	.884	.800	8	18	5-102975-9
⑧	⑥	.784	.700	7	16	5-102975-8
⑧	⑥	.684	.600	6	14	5-102975-7
⑧	⑥	.584	.500	5	12	5-102975-6
⑧	⑥	.484	.400	4	10	5-102975-5
⑧	⑥	.384	.300	3	8	5-102975-4
⑧	⑥	.284	.200	2	6	5-102975-3
⑧	⑥	.184	.100	1	4	5-102975-2
⑧	⑥	.084	—	—	2	5-102975-1

REMARKS	PLATING	C	B	A	NO OF POSN	ASSEMBLY PART NUMBER	
OBSOLETE	—	⑤	3.984	3.900	39	80	4-102975-0
—	—	⑤	3.884	3.800	38	78	3-102975-9
—	—	⑤	3.784	3.700	37	76	3-102975-8
—	—	⑤	3.684	3.600	36	74	3-102975-7
—	—	⑤	3.584	3.500	35	72	3-102975-6
—	—	⑤	3.484	3.400	34	70	3-102975-5
—	—	⑤	3.384	3.300	33	68	3-102975-4
—	—	⑤	3.284	3.200	32	66	3-102975-3
—	—	⑤	3.184	3.100	31	64	3-102975-2
—	—	⑤	3.084	3.000	30	62	3-102975-1
—	—	⑤	2.984	2.900	29	60	3-102975-0
—	—	⑤	2.884	2.800	28	58	2-102975-9
—	—	⑤	2.784	2.700	27	56	2-102975-8
—	—	⑤	2.684	2.600	26	54	2-102975-7
—	—	⑤	2.584	2.500	25	52	2-102975-6
OBSOLETE	—	⑤	2.484	2.400	24	50	2-102975-5
—	—	⑤	2.384	2.300	23	48	2-102975-4
—	—	⑤	2.284	2.200	22	46	2-102975-3
⑨	—	⑤	2.184	2.100	21	44	2-102975-2
—	—	⑤	2.084	2.000	20	42	2-102975-1
OBSOLETE	—	⑤	1.984	1.900	19	40	2-102975-0
—	—	⑤	1.884	1.800	18	38	1-102975-9
—	—	⑤	1.784	1.700	17	36	1-102975-8
⑨	—	⑤	1.684	1.600	16	34	1-102975-7
—	—	⑤	1.584	1.500	15	32	1-102975-6
—	—	⑤	1.484	1.400	14	30	1-102975-5
—	—	⑤	1.384	1.300	13	28	1-102975-4
OBSOLETE	—	⑤	1.284	1.200	12	26	1-102975-3
—	—	⑤	1.184	1.100	11	24	1-102975-2
⑨	—	⑤	1.084	1.000	10	22	1-102975-1
OBSOLETE	—	⑤	.984	.900	9	20	1-102975-0
⑨	—	⑤	.884	.800	8	18	102975-9
—	—	⑤	.784	.700	7	16	102975-8
SUPERSEDED	—	⑤	.684	.600	6	14	102975-7
OBSOLETE	—	⑤	.584	.500	5	12	102975-6
OBSOLETE	—	⑤	.484	.400	4	10	102975-5
OBSOLETE	—	⑤	.384	.300	3	8	102975-4
SUPERSEDED	—	⑤	.284	.200	2	6	102975-3
OBSOLETE	—	⑤	.184	.100	1	4	102975-2
⑨	—	⑤	.084	—	—	2	102975-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN R BROWN 01FEB2006	TE Connectivity
0 PLC ± -	1 PLC ± -	CHK J GEFORD 01FEB2006	NAME
2 PLC ± -	3 PLC ± .005	APVD J GEFORD 01FEB2006	PRODUCT SPEC
4 PLC ± -	ANGLES ± -	APPLICATION SPEC	SIZE
MATERIAL	FINISH SEE TABLE	WEIGHT	CAGE CODE DRAWING NO
			A1 00779 C=102975
		CUSTOMER DRAWING	SCALE 4:1 SHEET 1 OF 1 REV G3

HEADER ASSY, MOD II, BREAKAWAY, DR, .100X.100 CL, RIGHT ANGLE WITH .025 SQ POSTS