NOTES

1. ターミナル及びネイルの平坦度は0.1MAX.とする。
   COPLANARITY OF TERMINAL AND NAIL IS TO BE 0.1MAX.
2. スタンドオフ寸法
   DIMENSIONS OF STAND OFF.
3. ロット印字は任意とする
   LOT NUMBERING IS TO BE OPTIONAL.
4. 肉抜き位置は任意とする。
   CAVITY IS TO BE OPTIONAL.
5. カード検知スイッチ
   DETECT SWITCH

カード挿入時 CARD INSERTING POSITION	クローズ CLOSE
カード未挿入時 NO CARD	オープン OPEN

6. ELV及びRoHS適合品
   ELV AND RoHS COMPLIANT

ロットNo. : 6 7 0 7 0

- 西暦(1桁目) THE YEAR OF GRACE 6 : 2006年
- 月 MONTH 7 : 7月 A : 10月 B : 11月 C : 12月
- 日 DAY 07 : 07日
- ラインNo. LINE No.

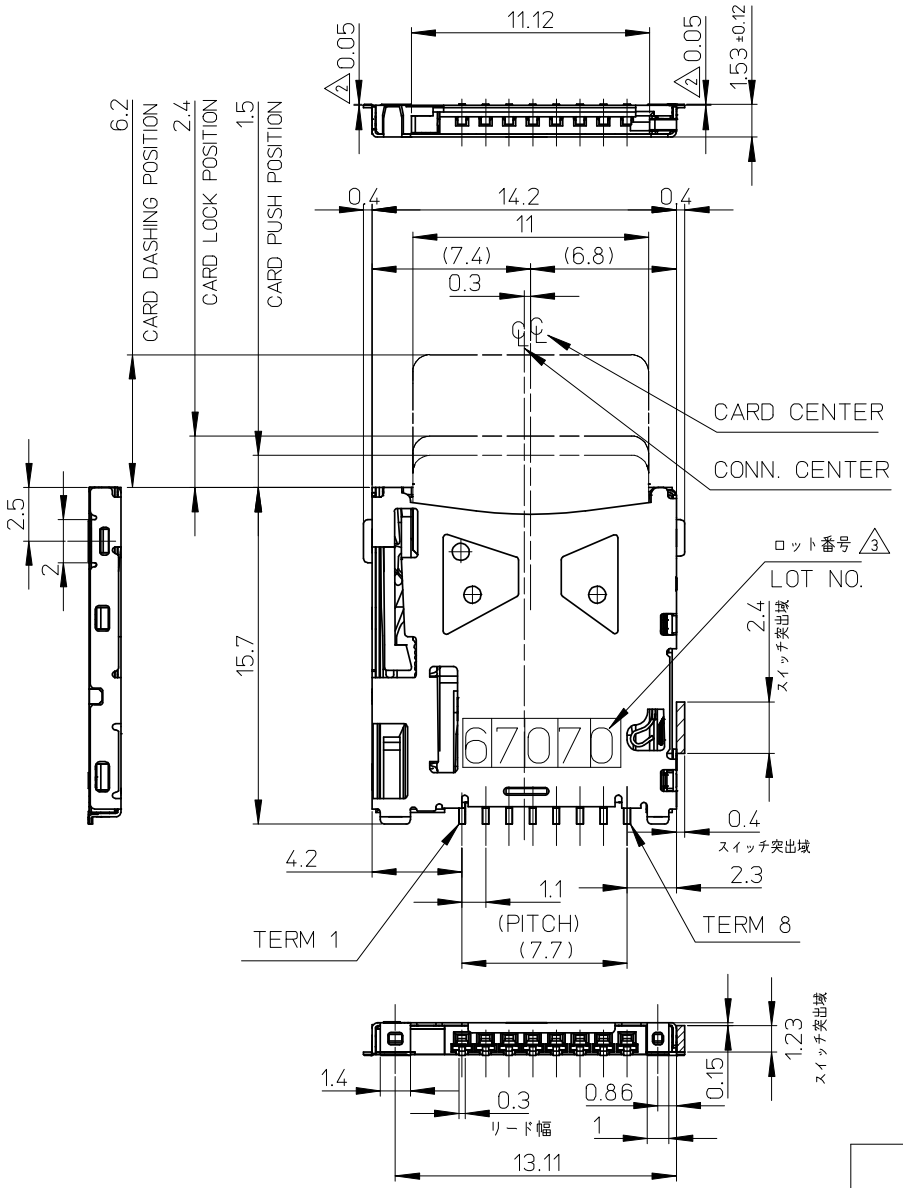

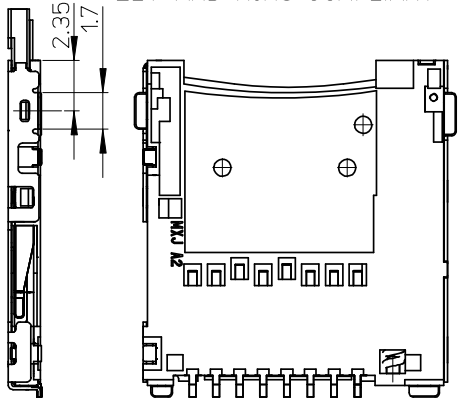

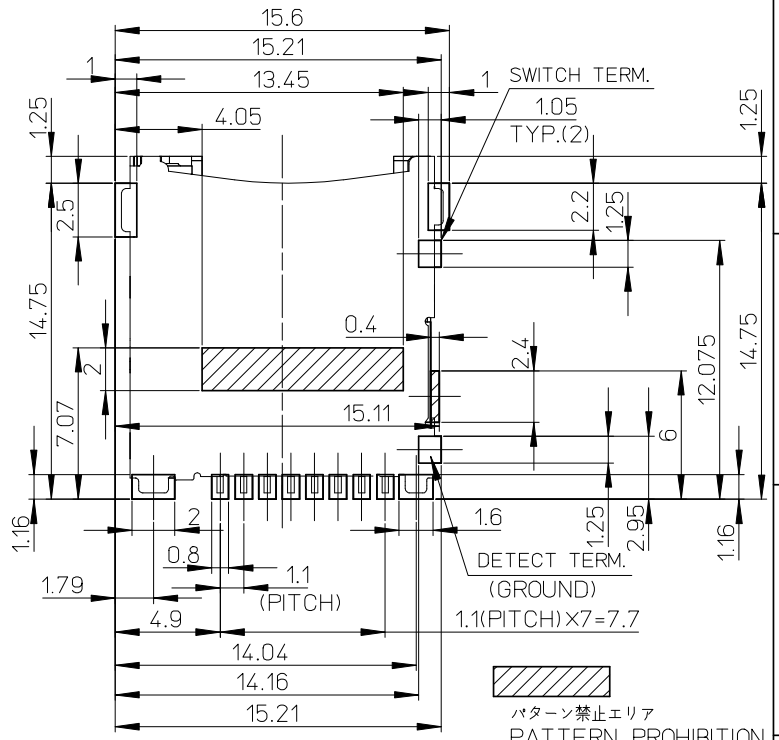

パターン禁止エリア
PATTERN PROHIBITION AREA

RECOMMENDED PCB PATTERN LAYOUT
GENERAL TOLERANCE : ±0.05

EMBOSSED TAPE	502702-0891	502702-08**
CONNECTOR ONLY	502702-0811	
PACKAGE	MATERIAL NO.	MODEL NO.

TERM 1	DAT2
TERM 2	CD/DAT3
TERM 3	CMD
TERM 4	Vdd
TERM 5	CLK
TERM 6	Vss
TERM 7	DAT0
TERM 8	DAT1

RELEASED
EC NO: J2008-3093 2008/02/29
DRWN:MNABEI 2008/02/29
CH'KD:THARUYAMA 2008/03/03
APPR:NUKITA
DESCRIPTION
REV 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±1 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: ---	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: M.NABEI	DATE: '08/02/22	TITLE: MICRO SD CARD CONN. NORMAL LOW-PROFILE ASS'Y	
CHECKED BY: T.HARUYAMA	DATE: '08/02/22		
APPROVED BY: N.UKITA	DATE: '08/02/22	MOLEX INCORPORATED	
MATERIAL NO.: SEE TABLE	DOCUMENT NO.: SD-502702-003	SHEET NO.: 1 OF 1	

SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION