

# CAB PC 303018 T3B

**FIBOX**  
Enclosing innovations



Sample image

**Order symbol:** CAB PC 303018 T3B

**Product nbr:** 8113042

**UL Code:** 8143042

**UL Name:** UL CAB PC 303018 T3B

**Description:** Smoked transparent door

**Remarks:** Lock on the long side


**Including:** Cabinet base, door with PUR gasket, 3mm double bit lock(s) with key, screws for mounting plate/DIN-rail and corner plugs.

**EAN:** 6418074020154

**EI. number:**

- Finland: 3424161
- Denmark: 8212019234
- Sweden: 2539943

CAB 3030L

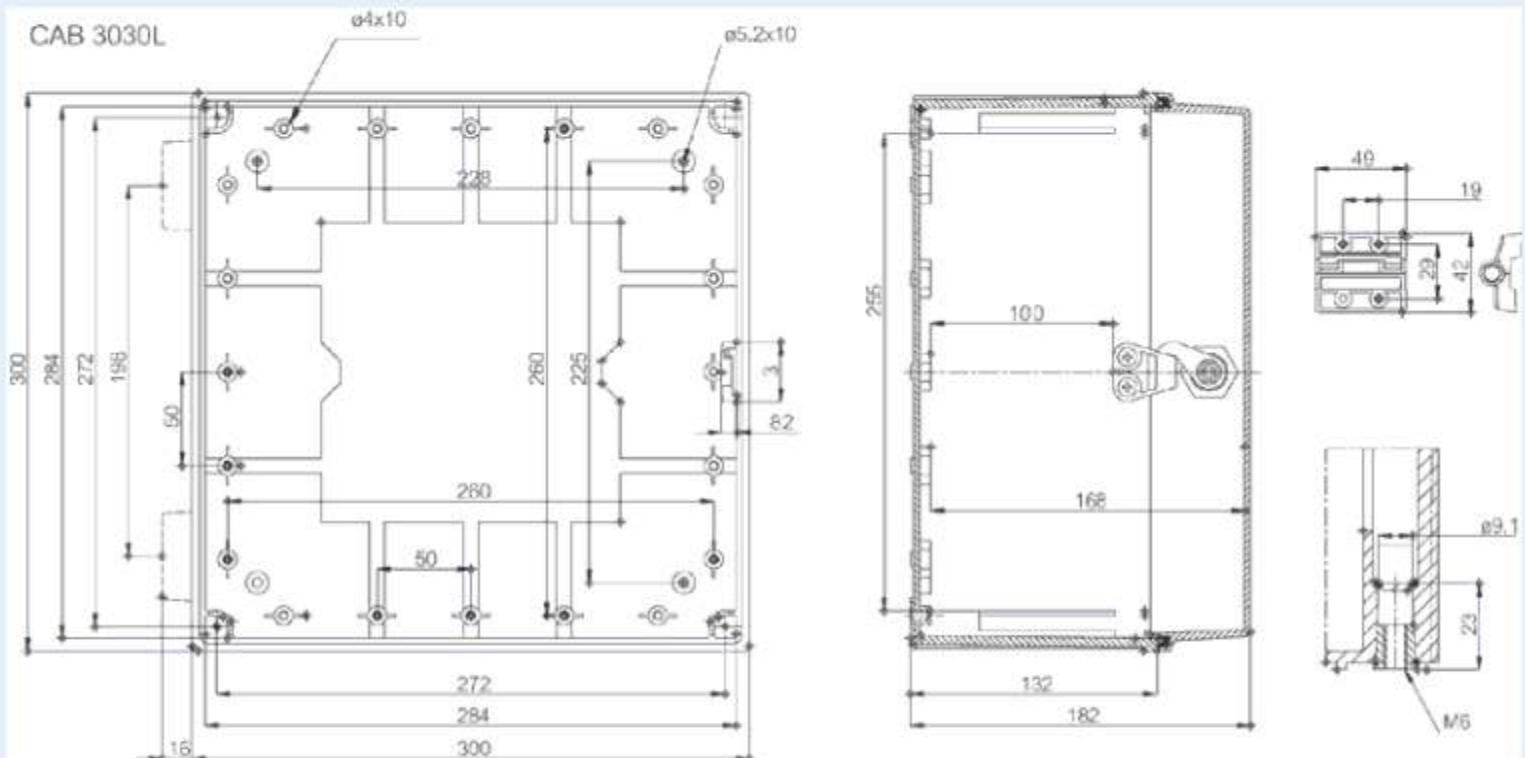

**Dimensions:**

	Height	Width	Depth
mm:	300	300	180
inch:	11.81	11.81	7.09

**Materials:**

Material:	Polycarbonate
Base colour:	RAL 7035 -light grey
Cover colour:	Clear transparent
Gasket material:	Polyurethane

**Temperatures:**

Temperature °C (short term):	-40 ... 120
Temperature °C (continuous):	-40 ... 80
Temperature °F (short term):	-40 ... 250
Temperature °F (continuous):	-40 ... 175

**Accessories:**

EKIV 33	Back Panel, for enclosures: (270 x 270 x 1)
MB 12225 AL	Swing door kit
FP A 33	Swing-out door/Front panel (aluminum), for enclosures: (268 x 268 x 1)
EKIV 27	DIN-35 Mounting rail, for enclosures: (266 x 35 x 1)
DRF 33	DIN rail frame kit, for enclosures:

**Rating:**

Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
Electrical insulation:	Totally insulated
Halogen free (DIN/VDE 0472, Part 815):	1
UV resistance:	UL 508
Flammability Rating:	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C:	960 °C
NEMA Class	

**Certificates:**

Certificate FI 40854