

Features


- Zero Reverse Recovery Current
- Zero Forward Recovery Voltage
- Positive Temperature Coefficient on V_F
- Temperature-independent Switching
- 175°C Operating Junction Temperature

V_{RRM}	=	1200	V
$I_F (T_c \leq 135^\circ\text{C})$	=	24	A
Q_C	=	51	nC

Benefits

- Replace Bipolar with Unipolar Device
- Reduction of Heat Sink Size
- Parallel Devices Without Thermal Runaway
- Essentially No Switching Losses

Package



TO-247-2



Applications

- Switch Mode Power Supplies
- Power Factor Correction
- Motor drive, PV Inverter, Wind Power Station

Part Number	Package	Marking
AS3D020120C	TO-247-2	ASD20120C

Maximum Ratings

Symbol	Parameter	Value	Unit	Test Conditions	Note
V _{RRM}	Repetitive Peak Reverse Voltage	1200	V	T _C = 25°C	
V _{RSM}	Surge Peak Reverse Voltage	1200	V	T _C = 25°C	
V _R	DC Blocking Voltage	1200	V	T _C = 25°C	
I _F	Forward Current	51 24 20	A	T _C ≤ 25°C T _C ≤ 135°C T _C ≤ 146°C	
I _{FSM}	Non-Repetitive Forward Surge Current	180	A	T _C = 25°C, t _p = 8.3ms, Half Sine Wave	
P _{tot}	Power Dissipation	230	W	T _C = 25°C	Fig.3
T _C	Maximum Case Temperature	146	°C		
T _J , T _{STG}	Operating Junction and Storage Temperature	-55 to 175	°C		
	TO-247-2 Mounting Torque	1	Nm	M3 Screw	

Electrical Characteristics

Symbol	Parameter	Typ.	Max.	Unit	Test Conditions	Note
V _F	Forward Voltage	1.55 2.2	1.8 2.5	V	I _F = 20A, T _J = 25°C I _F = 20A, T _J = 175°C	Fig.1
I _R	Reverse Current	5 30	20 200	μA	V _R = 1200V, T _J = 25°C V _R = 1200V, T _J = 175°C	Fig.2
C	Total Capacitance	1280 95 77	/	pF	V _R = 0V, T _J = 25°C, f = 1MHz V _R = 400V, T _J = 25°C, f = 1MHz V _R = 800V, T _J = 25°C, f = 1MHz	Fig.5
Q _C	Total Capacitive Charge	51	/	nC	V _R = 800V, I _F = 20A di/dt = 200A/μs, T _J = 25°C	Fig.4

Thermal Characteristics

Symbol	Parameter	Typ.	Unit	Note
R _{θJC}	Thermal Resistance from Junction to Case	0.65	°C/W	Fig.6
R _{θJA}	Thermal Resistance from Junction to Ambient	80	°C/W	
T _{sold}	Soldering Temperature	260	°C	

Typical Performance

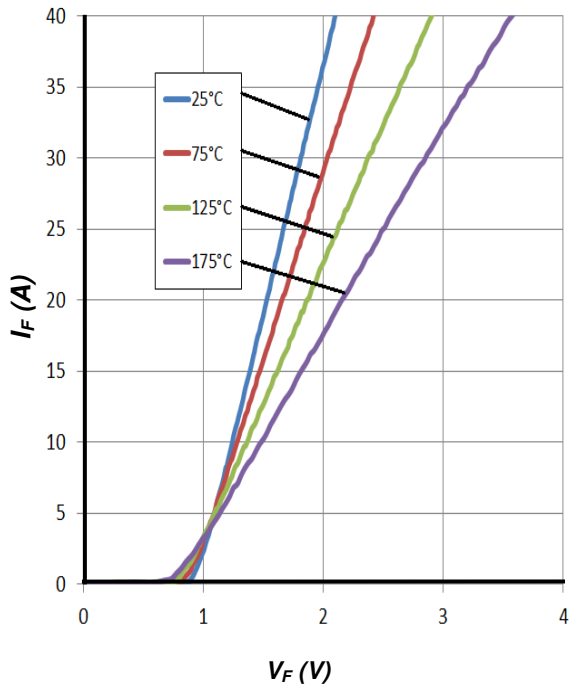


Figure 1. Forward Characteristics

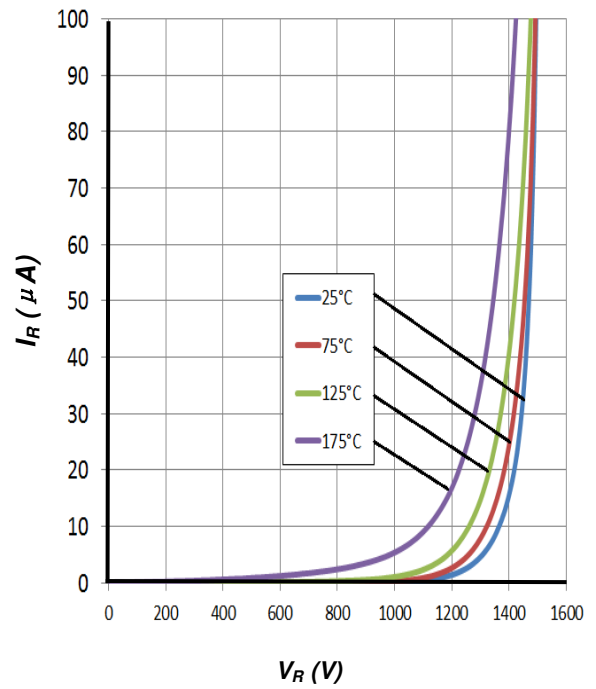


Figure 2. Reverse Characteristics

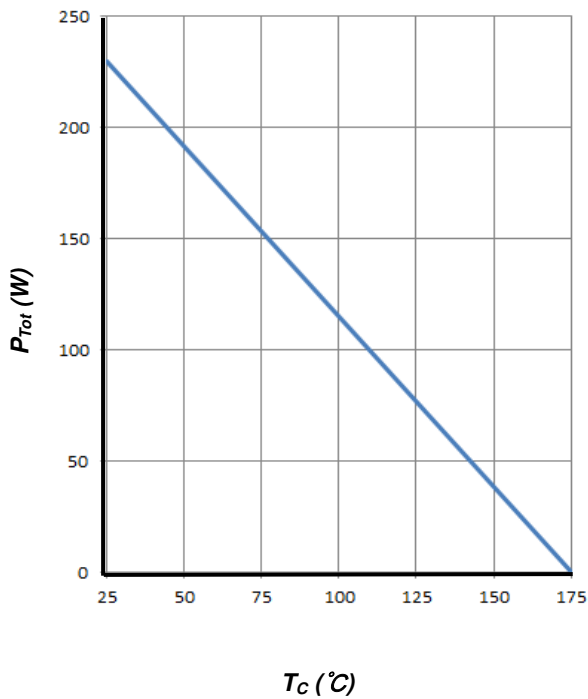


Figure 3. Power Derating

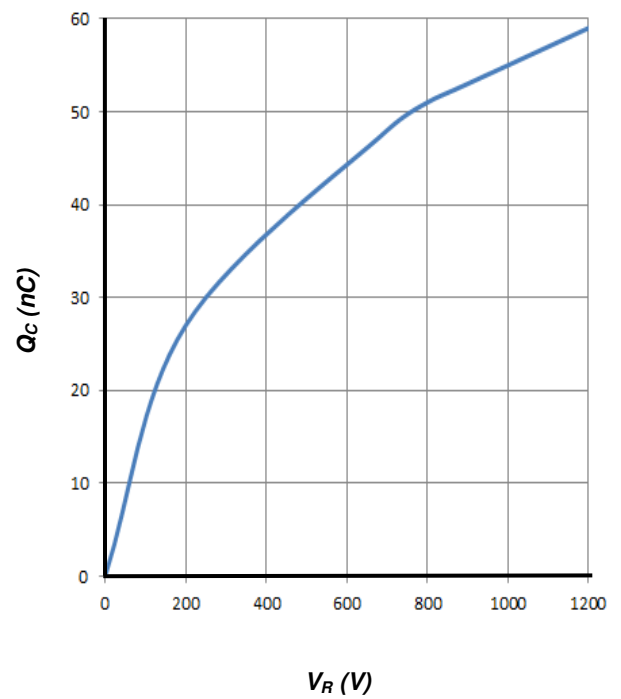


Figure 4. Total Capacitive Charge vs. Reverse Voltage

Typical Performance

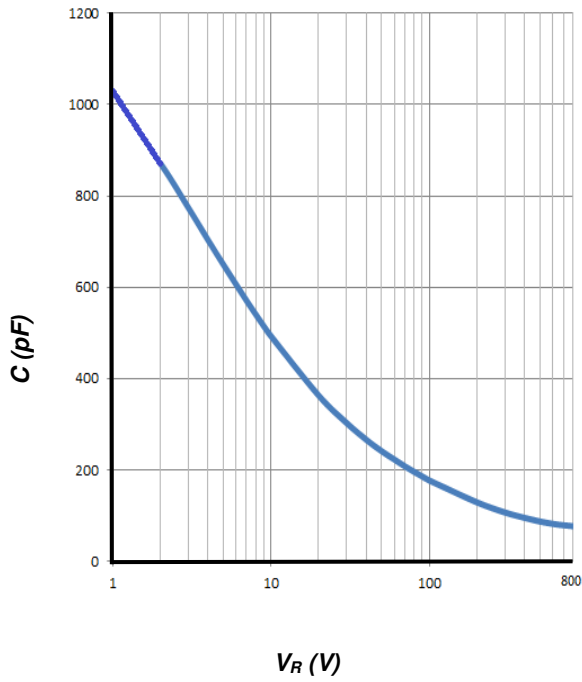


Figure 5. Total Capacitance vs. Reverse Voltage


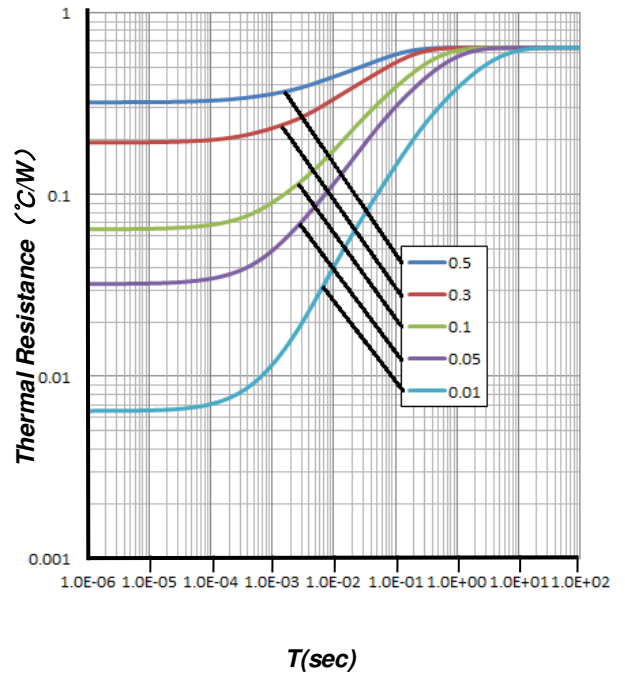


Figure 6. Transient Thermal Impedance

Package Dimensions

Package TO-247-2

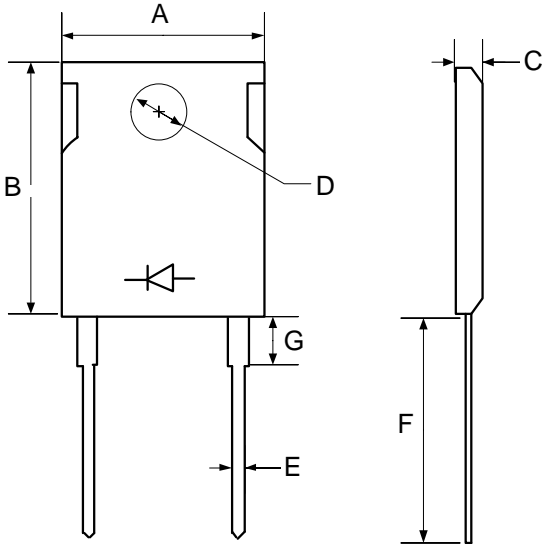

Symbol	Min. (mm)	Typ. (mm)	Max. (mm)
A	14.18	15.75	17.33
B	18.45	20.5	22.55
C	4.50	5.00	5.50
D	3.15	3.50	3.85
E	1.08	1.20	1.32
F	18.27	20.30	22.33
G	4.21	4.68	5.15