



UNIT:MM

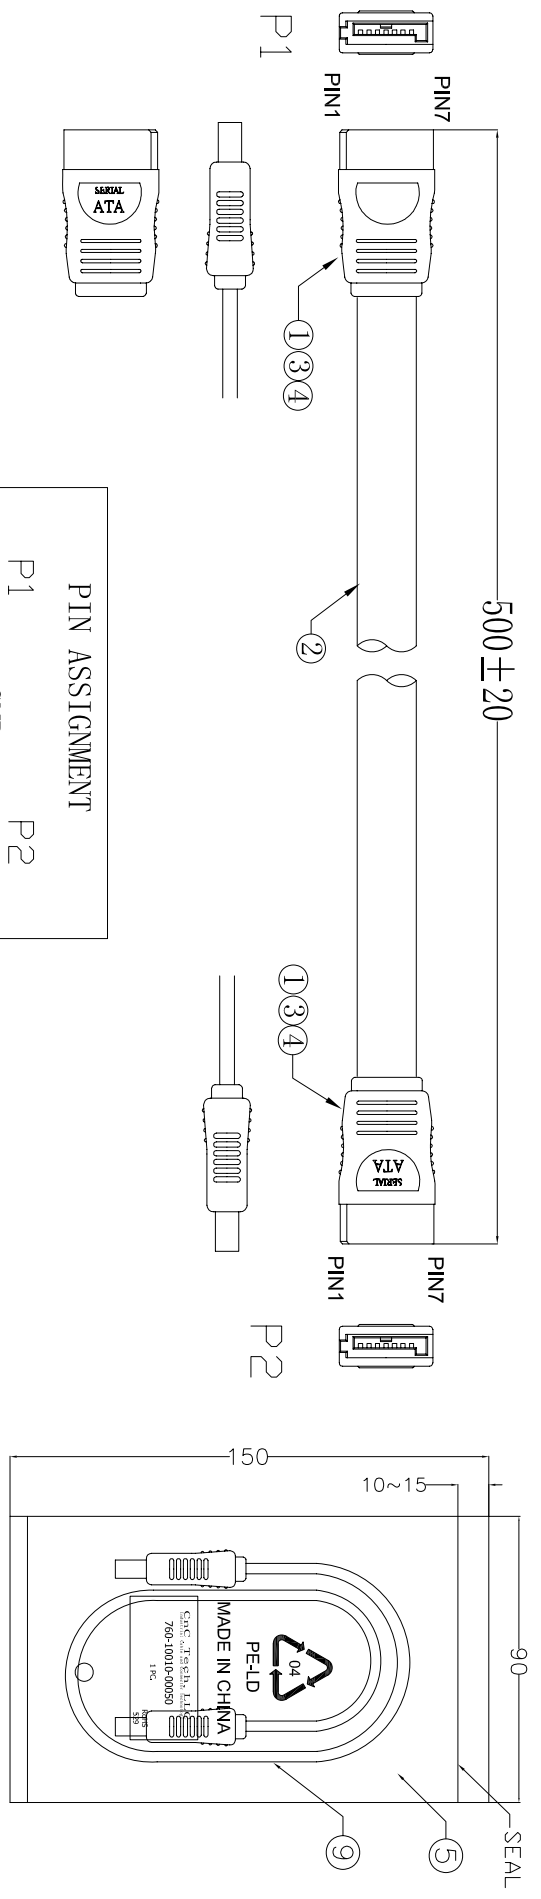

TEST REQUEST:  
 100% OPEN SHORT MIS WIRE TEST  
 CONTACT RESESTANCE 1 ohm MAX  
 INSULATION RESISTANCE 10M ohm MIN  
 HI-POT DC300V/0.1SECC

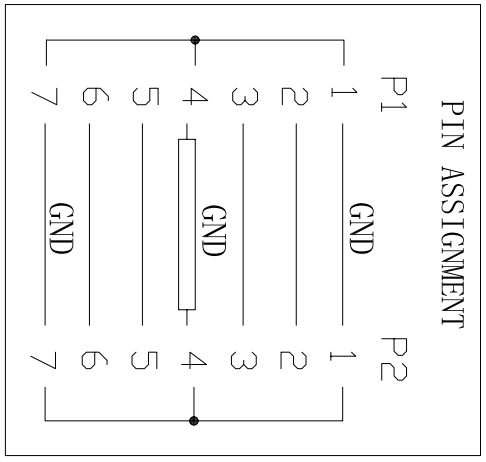

⑥	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm PRINT BLACK"MADE IN CHINA"+ "10PCS"
⑤	PE BAG	1	CLEAR SIZE: 90*150*0.05mm PRINT BLACK"MADE IN CHINA"+ "1PC"
④	IN JACKET	3g	CLEAR LD-PE
③	OUT JACKET	6g	PVC 45P COLOR BLACK
②	CABLE	1	UL2725 [26AWG(1/0.404)*2+D(1/0.32)*2+AL]*2F OD2.2*7.8mm JACKET RED(RD-16#) L490+5/-0mm.
①	CONN	2	SERIAL ATA FEMALE 7PIN CONNECTOR:GRIMP TYPE PIN:15U" INSULATOR:BLACK
NO.	NAME	Q'TY	SPECIFICATION

**Cnc Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	760-10010-00050
DECIDE BY		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	