



IOLAN SDSM Device Servers with integrated V.92 Modem




- 1 or 3 software selectable RS232/422/485 serial port interfaces
- Integrated V.92 modem - RJ11 jack
- 10/100 Ethernet
- Advanced security features for data encryption, user authentication and event management

For secure serial to Ethernet connectivity applications requiring dial-up modem access, the IOLAN SDSM Device Server is the most advanced compact product available on the market today. Delivering high performance in a compact size, an IOLAN SDSM, with integrated V.92 modem, offers extensive security, flexibility and next generation IPv6 technology. It is ideal for applications that require remote device/console management, data capture or monitoring over an IP network or dial-up modem connection.

Why IOLAN SDSM Device Servers are the preferred choice:

- High performance 66Mhz, 87 MIPS processor for the best performance on the market
- On-board RJ11 modem connection provides a secure and reliable connection to the POTS network
- TrueSerial® packet technology delivers the most authentic serial connections across Ethernet for serial protocol integrity
- Indicators for network and serial interfaces for easy troubleshooting
- Plug & Play installation utility eliminates configuration hassles for all IOLAN's on your IP network
- TruePort – Perle's com/tty redirector for serial based applications operates on Windows, Vista, Linux, Solaris, SCO and Unix
- FIPS 140-2 – Cryptographic modules meet US Government NIST compliancy
- Power over serial cable eliminates costs of a separate power installation
- Next Generation IP support (IPv6) for investment protection and network compatibility
- Compact and protective solid steel enclosure for tabletop, wall mount or DIN rail mounting
- Java-free browser access to remote serial console ports via Telnet and SSH
- Ping watchdog probes enable customers to power cycle equipment with attached Perle RPS power switches in the event of an unresponsive networking gear

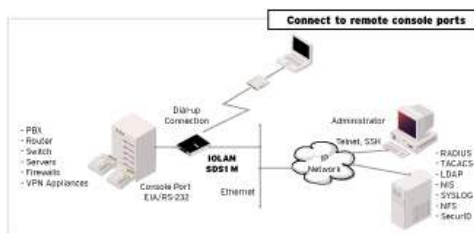

Secure Serial to Ethernet Connectivity

The IOLAN SDSM Device Server enables administrators to securely access remote serial console ports on equipment such as PBX, servers, routers, network storage equipment and security appliances through an IP network or via the integrated V.92 dial-up modem. Sensitive data such as credit card holder information is protected through standard encryption tools such as Secure Shell (SSH) and Secure Sockets Layer (SSL). Access by authorized users is assured via authentication schemes such as RADIUS, TACACS+, LDAP, Kerberos, NIS and RSA Security's SecurID tokens.

By using encryption technologies, an IOLAN can protect sensitive and confidential data from a serial device such as a credit card reader before being sent across a corporate Intranet or public Internet. For compatibility with peer encryption devices, all of the major encryption ciphers such as AES, 3DES, RC4, RC2 and CAST128 are fully supported.

Recognized as the most secure method for communicating to remote private networks over the Internet, the IPSec standard provides robust authentication and encryption of IP packets at the network layer of the OSI model. As a standard it is ideal for multi-vendor interoperability within a network providing flexibility and the ability to match the right solution for a particular application.

IOLAN Plug-ins

By choosing a Perle IOLAN Device Server you can rest assured that virtually any device with a serial COM port will operate in conjunction with your desired application exactly as it did when you had it directly connected. In the unlikely event that the Perle IOLAN Device Server does not enable this out of the box, *Perle will make it work.*

Perle IOLAN Device Servers utilize customer installable "Device Plug-ins" to successfully network devices where other solutions have failed. [Request a free engineering consultation now.](#)

Advanced IP Technology

With support for Next Generation IP (IPv6) the IOLAN Serial to Ethernet Device Server range provides organizations with investment protection to meet this rapidly growing standard.

Demand for IPv6, which is compatible with IPv4 addressing schemes, is driven by the need for more IP address. With the implementation and rollout of 3G cellular networks, a robust method is needed to handle the huge influx of new IP addressable devices on the Internet. In fact, the US Department of Defense mandated that all equipment purchased from 2005 be IPv6 compatible with full implementation by 2008. In addition, all major Operating Systems such as Windows, Linux, Unix and Solaris, as well as routers, have built-in support for IPv6.

It is therefore important for end users and integrators to select networking equipment that incorporates the IPv6 standard. The IOLAN line with support for IPv6 already built in, is the best choice in serial to Ethernet technology.

Flexible and Reliable Serial to Ethernet Connections

An IOLAN SDSM Device Server is ideal for connecting serial based COM port, UDP or TCP socket based applications to remote devices. Perle's TruePort re-director provides fixed TTY or COM ports to serial based applications enabling communication with remote devices connected to Perle IOLAN's either in encrypted or clear text modes. You can also tunnel serial data between devices across an IP network.

Perle's Device Management software provides better centralized control of multiple units resulting in maximum uptime for your remote equipment.

All IOLAN SDSM models have added protection against electrostatic discharges and power surges with robust 15Kv ESD protection circuitry enabling organizations to utilize this solution in the field with confidence.

Lifetime Warranty

All Perle IOLAN SDSM Serial to Ethernet Device Servers are backed by the best service and support in the industry including Perle's unique lifetime warranty. Since 1976 Perle has been providing its customers with networking products that have the highest levels of performance, flexibility and quality.

Serial Port Access

- Connect directly using Telnet / SSH by port and IP address
- Connect with EasyPort menu by Telnet / SSH
- Use an internet browser to access with HTTP or secure HTTPS via EasyPort Web menu
- Java-free browser access to remote serial console ports via Telnet and SSH
- Ports can be assigned a specific IP address (aliasing)
- Multisession capability enables multiple users to access ports simultaneously
- Multihost access enables multiple hosts/servers to share serial ports

Accessibility

- In-band (Ethernet) and out-of-band (dial-up modem) support
- Dynamic DNS enables users to find a console server from anywhere on the Internet
- Domain name control through DHCP option 81
- IPV6 and IPV4 addressing support

Availability

- Primary/Backup host functionality enables automatic connections to alternate host(s)

Security

- SSH v1 and v2
- SSL V3.0/TLS V1.0, SSL V2.0
- SSL Server and SSL client mode capability
- SSL Peer authentication
- IPSec VPN : NAT Traversal, ESP authentication protocol
- Encryption: AES (256/192/128), 3DES, DES, Blowfish, CAST128, ARCFOUR(RC4), ARCTWO(RC2)
- Hashing Algorithms: MD5, SHA-1, RIPEMD160, SHA1-96, and MD5-96
- Key exchange: RSA, EDH-RSA, EDH-DSS, ADH
- X.509 Certificate verification: RSA, DSA
- Certificate authority (CA) list
- Local database
- RADIUS Authentication, Authorization and Accounting
- TACACS+ Authentication, Authorization and Accounting
- LDAP, NIS, Kerberos Authentication
- RSA SecureID-agent or via RADIUS Authentication
- SNMP v3 Authentication and Encryption support
- IP Address filtering
- Disable unused daemons
- Active Directory via LDAP

Terminal Server

- Telnet
- SSH v1 and v2
- Rlogin
- Auto session login
- LPD, RCP printer
- MOTD - Message of the day

Serial machine to Ethernet

- Tunnel raw serial data across Ethernet - clear or encrypted
- Raw serial data over TCP/IP
- Raw serial data over UDP
- Serial data control of packetized data
- Share serial ports with multiple hosts/servers
- Virtual modem simulates a modem connection - assign IP address by AT phone number

Virtual modem data can be sent over the Ethernet link with or without SSL encryption
TruePort com/tty redirector for serial based applications on Windows, Vista, Linux, Solaris, SCO and HP UX. For latest drivers click here
 
"TrueSerial packet technology provides the most authentic serial connections across Ethernet ensuring serial protocol integrity"
RFC 2217 standard for transport of serial data and RS232 control signals
Customizable or fixed serial baud rates
Plug-ins allow customer or Perle provided plug-ins for special applications
Software Development Kit (SDK) available
Serial encapsulation of industrial protocols such as ModBus, DNP3 and IEC-870-5-101
ModBus TCP gateway enables serial Modbus ASCII/RTU device connection to ModBus TCP
Data logging will store serial data received when no active TCP session and forward to network peer once session re-established - 32K bytes circular per port

Console Management

Sun Break Safe
Local port buffer viewing - 256K bytes per port
External port buffering via NFS, encrypted NFS and Syslog
Event notification
Manage AC power of external equipment using Perle RPS power management products
Clustering - central console server enables access ports across multiple console servers
Windows Server 2003/2008 EMS - SAC support GUI access to text-based Special Administrative Console
Ping watchdog probes enable customers to power cycle equipment with attached Perle RPS power switches in the event of an unresponsive networking gear

Remote Access

Dial, direct serial	PPP, PAP/CHAP, SLIP
	HTTP tunneling enables firewall-safe access to remote serial devices across the internet
Automatic DNS Update	Utilize DHCP Opt 81 to set IOLAN domain name for easy name management and with Dynamic DNS support , users on the Internet can access the device server by name without having to know its IP address. See Automatic DNS update support for details
IPSEC VPN client/servers	Microsoft L2TP/IPSEC VPN client (native to Windows XP)
	Microsoft IPSEC VPN Client (native to Windows Vista)
	Cisco routers with IPSEC VPN feature set
	Perle IOLAN SDS/STS and SCS models

OA&M (Operations, Administration and Management)

SNMP V3 - read and write, Perle MIB
Syslog
Perle Device Manager - Windows based utility for large scale deployments
Configurable default configuration
Installation Wizard
Set a Personalized Factory Default for your IOLANs

Protocols


IPv6, IPv4, TCP/IP, Reverse SSH, SSH, SSL, IPSec/IPv4, IPSec/IPv6, L2TP/IPSec, CIDR, RIPV2/MD5, ARP, RARP, UDP, UDP Multicast, ICMP, BOOTP, DHCP, TFTP, SFTP, SNTP, Telnet, raw, reverse Telnet, LPD, RCP, DNS, Dynamic DNS, WINS, HTTP, HTTPS, SMTP, SNMPV3, PPP, PAP/CHAP, SLIP, CSLIP, RFC2217, MSCHAP

Hardware Specifications - IOLAN SDSM - 1 and 3 port Compact Device Servers with integrated V.92 Modem

	IOLAN SDS1 M	IOLAN SDS3 M	IOLAN SDS3M TB
Processor	MPC852T, 66 Mhz, 87 MIPS		
Memory			
RAM MB	32		
Flash MB	8		
Interface Ports			
Number of Serial Ports	1	3	
Serial Port Interface	Software selectable EIA-232/422/485 on RJ45		
Modem Port	RJ11 connector, V.92/V.90 standard		
Sun / Solaris	Sun break safe		
Serial Port Speeds	50bps to 230Kbps with customizable baud rate support		
Data Bits	5,6,7,8, 9-bit protocol support		
Parity	Odd, Even, Mark, Space, None		
Flow Control	Hardware, Software, Both, None		
Serial Port Protection	15Kv Electrostatic Discharge Protection (ESD)		
Local Console Port	RS232 on Serial Port		
Network	10-base T / 100-base TX Ethernet RJ45		
	Software selectable Ethernet speed 10/100 Auto		
	Software selectable Half/Full/Auto duplex		
Ethernet Isolation	1.5Kv Magnetic Isolation		
Power			
Power Supply	120 V AC (USA), 230V AC (International) Wall Power Adaptor included		Terminal Block
Power Supply Options	Power via External power 9-30v DC, 4.8 Watts uses standard 5.5mm x 9.5mm x 2.1mm barrel socket, Power IN over serial cable		Power via external power 9-30v DC, 4.8 Watts, terminal Block power. Power In over serial cable.
Nominal Input Voltage	12v DC		
Input Voltage Range	9-30v DC		
Power External Device via Serial Port	+5v DC regulated, 1W max		
Typical Power Consumption @ 12v DC (Watts)	1.7 (does not include power for devices connected to serial port)	2.1	
Indicators			
LEDs	Power/Ready		
	Network Link		
	Network Link activity		
	Serial: Transmit and Receive data per port		
Environmental Specifications			
Heat Output (BTU/HR)	5.8	7.2	
MTBF (Hours)	414,649	195,678	
Operating Temperature	0C to 55C, 32F to 131F		
Storage Temperature	-40C to 66C, -40F to 150F		
Humidity	5 to 95% (non condensing) for both storage and operation.		
Case	SECC Zinc plated sheet metal (1 mm)		
Ingress Protection Rating	IP40		
Mounting	Wall or Panel mounting, DIN Rail mouting kit optional		

Product Weight and Dimensions			
Weight	0.23 Kg (0.5 lbs)	0.7 KG (1.6 lbs)	0.36 KG (0.8 lbs)
Dimensions	91 x 64 x 24 (mm), 3.6 x 2.5 x 0.92 (in) not including mounting tabs, 91 x 89 x 24 (mm), 3.6 x 3.5 x 0.92 (in) includes mounting tabs	11.3 x 8.1 x 2.8 (cm) 4.4 x 3.2 x 1.1 (in)	
Packaging			
Shipping Dimensions	25.5 x 16.5 x 6.5 (cm), 10 x 6.5 x 2.6 (in)		
Shipping weight	0.75 Kg including Power Adaptor	0.6 KG (1.3 lbs)	
Regulatory Approvals			
Emissions	FCC Part 15, Subpart B, Class A		
	CFR47:2003, Chapter 1, Part 15 Subpart B,(USA) Class A		
	ICES-003, Issue 4, February 2004 (Canada)		
	EN55022:1998 + A1:2000 + A2:2003 Class A		
	EN61000-3-2 : 1995, Limits for Harmonic Current Emissions		
	EN61000-3-3 : 1995, Limits of Voltage Fluctuations and Flicker		
Immunity	EN55024:1998 + A1:2001 + A2:2003		
	EN61000-4-2: Electrostatic Discharge		
	EN61000-4-3: RF Electromagnetic Field Modulated		
	EN61000-4-4: Fast Transients		
	EN61000-4-5: Surge		
	EN61000-4-6: RF Continuous Conducted		
	EN61000-4-8: Power-Frequency Magnetic Field		
	EN61000-4-11: Voltage Dips and Voltage Interruptions		
Safety	IEC 60950-1 : 2005 (2nd Edition) + A1 : 2009 and EN 60950-1 : 2006 + A11 : 2009		
	CAN/CSA-C22.2 No. 60950-1-03 and ANSI/UL 60950-1, First Edition April 1st 2003 (Recognized Component)		
Other	RoHS - 2002/95/EC Directive		
	WEEE - 2002/96/EC Directive		
	CCATS - G052929		
	ECCN - 5A992A		
	HTSUS Number: 8471.80.1000		
	Perle Lifetime warranty		

Serial Connector Pinout


<p>IOLAN DTE</p>  <p>Pin 1</p> <p>RJ45 Socket</p>	IOLAN RJ45 Socket	Direction	RS232	RS485 Full Duplex	RS485 Half Duplex	RS422
	1	→	Power In	Power In	Power In	Power In
	2	→	DCD	-	-	-
	3	←	RTS	TxD+	DATA+	DATA+ TxD+
	4	→	DSR	-	-	-
	5	←	TXD	TxD-	DATA-	TxD-
	6	→	RXD	RxD+	-	RxD+
	7	—	GND	GND	GND	GND
	8	→	CTS	RxD-	-	RxD-
	9	←	DTR	-	-	-
	10	←	Power Out	Power Out	Power Out	Power Out

Optional Perle adapters for use with straight thru CAT5 cabling

TCP

Using RAW TCP Sockets


A raw TCP socket connection which can be initiated from the serial-Ethernet device or from the remote host/server. This can either be on a point to point or shared basis where a serial device can be shared amongst multiple devices. TCP sessions can be initiated either from the TCP server application or from the Perle IOLAN serial-Ethernet adapter.

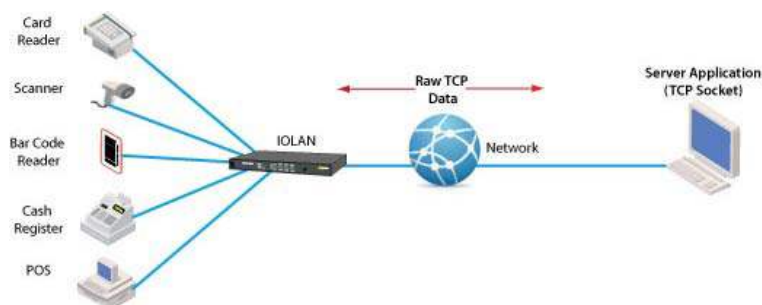

UDP

Using Raw UDP Sockets


For use with UDP based applications, Perle IOLANs can convert serial equipment data for transport across UDP packets either on a point to point basis or shared across multiple devices.

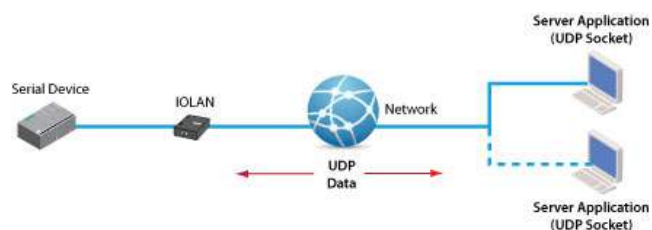

Console Server

Console Management

For access to remote console ports on routers, switches, etc, Perle IOLAN's enable administrators secure access to these RS232 ports via inband Reverse Telnet / SSH or out of band with dial-up modems. Perle IOLAN models with integrated modems are available.

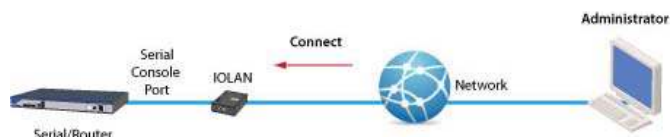

COM/TTY

Connect Serial-based Applications with a COM/TTY Port Driver

Serial ports can be connected to network servers or workstations running Perle's TruePort software operating as a virtual COM port. Sessions can be initiated either from the Perle IOLAN or from TruePort.



Tunneling

Serial Tunneling between two Serial Devices

Serial Tunneling enables you to establish a link across Ethernet to a serial port on another IOLAN. Both IOLAN serial ports must be configured for Serial Tunneling (typically one serial port is configured as a Tunnel Server and the other serial port as a Tunnel Client).














Virtual Modem

Virtual Modem

Enables the serial-Ethernet adapter to simulate a modem connection. When connected to the IOLAN and initiates a modem connection, the IOLAN starts up a TCP connection to another IOLAN serial-Ethernet adapter configured with a Virtual Modem serial port or to a host running a TCP application.



	Description	Power Cord	Product Part Number
	IOLAN SDS1 M - 1 x RJ45 connector with one integrated V.92/ V.90 data modem , software selectable EIA232/422/485 interface, 10/100 Ethernet, advanced data encryption, user authentication and event management security features included, IPv6, COM port redirector, 15kv ESD	USA	 04030804
		UK	 04030801
		EU	 04030802
	IOLAN SDS3 M - 3 x RJ45 connector with one integrated V.92/ V.90 data modem , software selectable EIA232/422/485 interface, 10/100 Ethernet, advanced data encryption, user authentication and event management security features included, IPv6, COM port redirector, 15kv ESD	USA	 04030824
		UK	 04030821
		EU	 04030822
		SA	 04030825
		AUS	 04030826
	IOLAN SDS3 M TB - 3 x RJ45 connector with one integrated V.92/ V.90 data modem , terminal block power connector , software selectable RS232/422/485 interface, 10/100 Ethernet, advanced data encryption, user authentication and event management security features included, IPv6, COM port redirector, 15kv ESD	None	 04030890

Accessories:

Accessories			
	3m Cbl-Straihthru	3 meter RJ45 to RJ45 CAT5 Straight-thru cable # 1100360-10	 04005120
	4 DIN Rail Mount Bkt	DIN Rail Mounting Kit for 4 & 8 port IOLAN SDS/STS wall mount models and Stand-Alone Media Converters. Two of these brackets are required for the 8 port STS8-D model.	 04030840
	DIN Rail Mount Kit	DIN Rail Mounting Kit for 1 or 2 port IOLAN DS, TS, SDS	 04030030
	Starter Kit (8-wire)	IOLAN Starter Kit (8-wire): 1x RJ-45 to DB-25 DTE Male adapter, 1x RJ-45 to DB-25 DCE Male adapter, 1x RJ-45 to DB-25 DTE Female adapter, 1x RJ-45 to DB-9 Male DTE adapter, 1x RJ-45 to DB-9 Female DTE adapter and 1x RJ45M-RJ45F Sun/Cisco crossover adapter	 04007000
Cable Accessories			
Please click here to see what adapters you may need			
	3m Cbl-Sun/Cisco Prl	3m Cbl-Sun/Cisco Prl - RJ45-RJ45 IOLAN DS to Sun/Cisco 3m Cable	 04030070
	DBA0010	DBA0010 - RJ-45F to DB-25F crossover (DTE) adapter for console port # 1100220-10	 04006950
	DBA0010 8pck	DBA0010 8pck - 8 pack of #04006950 IOLAN-RJ45F to DB25F (DTE) crossover adapter	 04031240
	DBA0011	DBA0011 - RJ-45F to DB-25M crossover (DTE) adapter for console ports. # 1100230-10	 04006960
	DBA0011 8pck	DBA0011 8pck - 8 pack of #04006960 IOLAN-RJ45F to DB25M (DTE) crossover adapter	 04031250
	DBA0013	DBA0013 - RJ-45F to DB-25M straight-thru (DCE) adapter for modems # 1100260-10	 04006990
	DBA0013 8pck	DBA0013 8pck - 8 pack of #04006990 IOLAN-RJ45F to DB25M Straight-thru adapter for modems	 04031280
	DBA0020	DBA0020 - RJ-45F to DB-9F crossover (DTE) adapter for console ports. # 1100240-10	 04006970
	DBA0020 8pck	DBA0020 8pck - 8 pack of #04006970 IOLAN-RJ45F to DB9F (DTE) crossover adapter	 04031260
	DBA0021	DBA0021 - RJ-45F to DB-9M crossover (DTE) adapter for console ports. # 1100250-10	 04006980
	DBA0021 8pck	DBA0021 8pck - 8 pack of #04006980 IOLAN-RJ45F to DB9M (DTE) crossover adapter	 04031270
	DBA0023	DBA0023 - RJ-45F to DB-9M straight-thru (DCE) adapter for modems # 1100340-10	 04007200
	DBA0031	DBA0031 - IOLAN - RJ45M to RJ45F Sun/Cisco crossover adapter # 1100219-10	 04030080
	DBA0031 8pck	DBA0031 8pck - 8 pack of #04030080 IOLAN-RJ45M to RJ45F Sun/Cisco crossover adapter	 04031230
Maintenance agreements - Console Server / Device Server / Terminal Server			
Please click here to check for maintenance availability in your region			
	NSS- 1 PortXPRESSREP	1 Port Terminal/Device/Console Server - Express Replacement	 SERNSS01
	NSS- 4 PortXPRESSREP	4 Port Terminal/Device/Console Servers - Express Replacement	 SERNSS04
	NSS- 4 PortXPRESSREPF	4 Port Terminal/Device/Console Servers - Express Replacement French	 SERNSS04F