

SPO™ Low Loss, Low PIM Coaxial Cables

Flexible, Low PIM, Jumper Cables

- -160dBc PIM for optimal system performance
- Super flexible for ease of installation
- Corrugated copper outer conductor providing greater than 100dB Shielding
- Durable black polyethelene outer jacket suitable for outdoor use

Major Carrier Approved!


ISO 9001 Certified



SPO-250, SPO-375, SPO-500 50 Ohm low loss, low PIM cable assemblies


- Available in any required connector configuration and length
- Large selection of standard configurations for quick delivery
- Check inventory at StockCheck on our website
- 100% tested for static and dynamic PIM, VSWR and insertion loss
- Serial marker band includes PIM, VSWR and IL test data which is retained and accessible on the Times website
- 10 year Times Microwave warranty

Typical VSWR

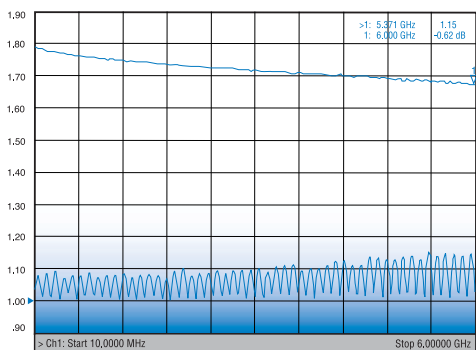


SPO250NMNM1.0M

Dynamic PIM Test Results

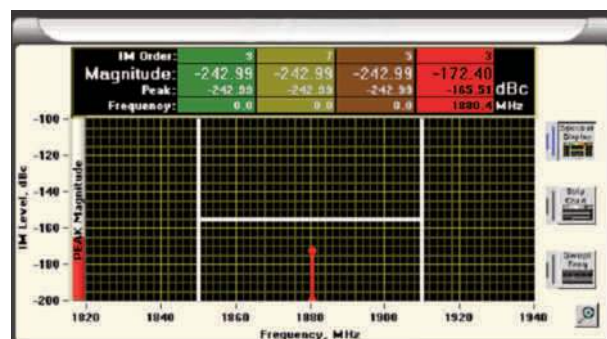

SPO™ Coaxial Cables

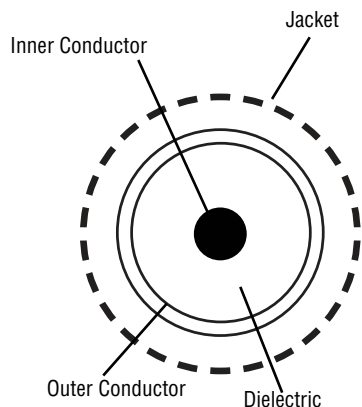

Cable Construction

Inner Conductor:

- SPO-250: Solid bare copper
- SPO-375: BCCAL
- SPO-500: BCCAL

Dielectric: Foam Polyethylene

Outer Conductor: Seam welded corrugated copper tube


Jacket: UV and sunlight resistant black polyethylene

| Physical Specifications | SPO-250 | | SPO-375 | | SPO-500 | |
|---|--|---------|--|---------|--|---------|
| Jacket: Extruded Polyethylene; OD: in(mm) | 0.300 | (7.7) | 0.425 | (10.8) | 0.525 | (13.4) |
| Outer Conductor: Corrugated Copper Tube; OD: in(mm) | 0.250 | (6.3) | 0.380 | (9.6) | 0.472 | (12.1) |
| Dielectric: Foam PE; OD: in(mm) | 0.190 | (4.8) | 0.285 | (7.1) | 0.370 | (9.4) |
| Center Conductor: Solid BCCAL; OD: in(mm) | 0.075 | (1.9) | 0.110 | (2.8) | 0.142 | (3.6) |
| Bend Radius: in(mm) | 1.0 | (25) | 1.7 | (2.3) | 2.0 | (51) |
| Bending Moment: ft-lbs (N-m) | 1.84 | (2.5) | 2.07 | (2.8) | 3.25 | (4.4) |
| Tensile Strength: lb (kg) | 150 | (68.2) | 175 | (79.5) | 210 | (95.5) |
| Flat Plate Crush Strength: lb/in (kg/mm) | 100 | (1.8) | 100 | (1.8) | 110 | (2.0) |
| Weight: lbs/1000 ft (kg/km) | 46 | (67) | 78 | (120) | 140 | (210) |
| Environmental Specifications | | | | | | |
| Installation Temperature Range °F/°C | -25/+60°C | | -25/+60°C | | -25/+60°C | |
| Storage Temperature Range °F/°C | -70/+85°C | | -70/+85°C | | -70/+85°C | |
| Operating Temperature Range °F/°C | -40/+85°C | | -40/+85°C | | -40/+85°C | |
| Electrical Specifications | | | | | | |
| Velocity of Propagation: % | 84 | | 84 | | 84 | |
| Impedance: Ohms | 50 | | 50 | | 50 | |
| Capacitance: pF/ft (pF/m) | 24.2 | (79.4) | 24.3 | (79.7) | 25.2 | (82.7) |
| Inductance: μH/ft (uH/m) | 0.61 | (0.200) | 0.61 | (0.200) | 0.63 | (0.205) |
| Shielding Effectiveness: dB | >100 | | >100 | | >100 | |
| Center Conductor DC Resistance: Ohms/1000 ft/(km) | 3.00 | (9.84) | 1.30 | (4.26) | 0.82 | (2.70) |
| Shield DC Resistance: Ohms/1000 ft (km) | 2.00 | (6.56) | 1.52 | (4.98) | 1.00 | (3.28) |
| Attenuation & Average Power @ MHz | dB/100 ft (dB/100m) kW | | dB/100ft (dB/100m) kW | | dB/100ft (dB/100m) kW | |
| 450 | 4.1 | (13.3) | 1.01 | 2.8 | (9.1) | 2.11 |
| 700 | 5.1 | (17.1) | 0.81 | 3.5 | (11.5) | 1.67 |
| 850 | 5.7 | (18.7) | 0.73 | 3.9 | (12.8) | 1.50 |
| 1900 | 8.9 | (29.2) | 0.47 | 6.0 | (21.0) | 0.97 |
| 2100 | 9.4 | (30.8) | 0.45 | 6.4 | (21.0) | 0.92 |
| 2300 | 9.9 | (32.5) | 0.43 | 6.7 | (22.0) | 0.87 |
| 2400 | 10.1 | (33.1) | 0.42 | 6.9 | (22.6) | 0.85 |
| 4900 | 15.0 | (49.2) | 0.28 | 10.5 | (34.4) | 0.57 |
| 5800 | 16.5 | (54.1) | 0.26 | 11.6 | (38.0) | 0.52 |
| 10.9 | (35.8) | 0.63 | | | | |
| Connectors (solder body) (connectors with BLK suffix packed 100 pieces per bulk pack) | | | | | | |
| N Male Straight | TC-SPO250-NM-LP (3190-6053BLK) | | TC-SPO375-NM-LP (3190-6059BLK) | | TC-SPO500-NM-LP (3190-6004BLK) | |
| N Male Right Angle | TC-SPO250-NM-RA-LP (3190-6055BLK) | | TC-SPO375-NM-RA (3190-6061BLK) | | TC-SPO500-NM-RA-LP (3190-6065BLK) | |
| N Female | TC-SPO250-NF-LP (3190-6054BLK) | | TC-SPO375-NF-LP (3190-6060BLK) | | TC-SPO500-NF-LP (3190-6005BLK) | |
| 7-16 DIN Male Straight | TC-SPO250-716M-LP (3190-6056BLK) | | TC-SPO375-716M-LP (3190-6062BLK) | | TC-SPO500-716M-LP (3190-6066BLK) | |
| 7-16 DIN Male Right Angle | TC-SPO250-716M-RA-LP (3190-6058BLK) | | TC-SPO375-716M-RA-LP (3190-6064BLK) | | TC-SPO375-716M-RA-LP (3190-6068BLK) | |
| 7-16 DIN Female Straight | TC-SPO250-716-F-LP (3190-6057BLK) | | TC-SPO375-716F-LP (3190-6063BLK) | | TC-SPO500-716F-LP 3190-6067BLK | |
| SMA Male Straight | TC-SPP250-SM-LP (3190-6182BLK) | | N/A | | N/A | |

- Jumpers available in any length with most popular connector combinations
- iBwave VEX files available at www.iBwave.com

SPO™ Coaxial Cables

Smart Part Number Key for Low PIM Jumpers

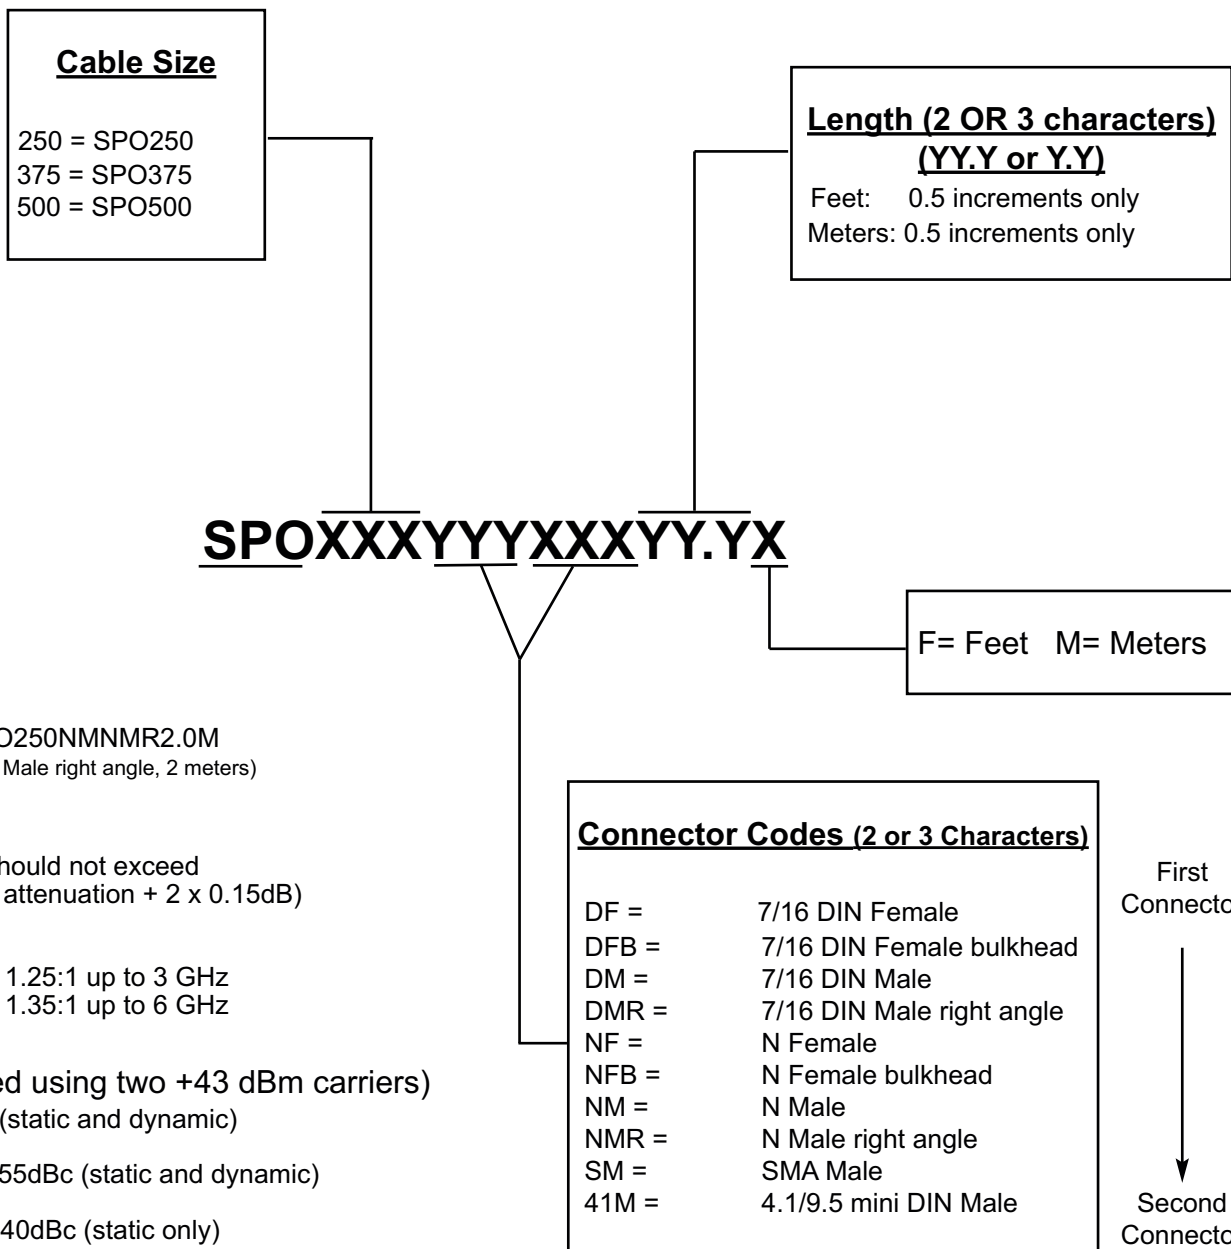

**Many assembly configurations are available from stock.
Refer to the on-line [StockCheck](#) for specific configurations.**

SPO™ Coaxial Cables

About TIMES MICROWAVE SYSTEMS

Times Microwave Systems, was founded in 1948 as the Times Wire and Cable Company. Today, the company specializes in the design and manufacture of high performance flexible, semi-flexible and semi-rigid coaxial cable, connectors and cable assemblies. With over 60 years of leadership in the design, development, and manufacture of coaxial products for defense microwave systems, Times Microwave Systems is the acknowledged leader, offering high tech solutions for today's most demanding applications.

Cable assemblies from Times Microwave Systems are used as interconnects for microwave transmitters, receivers, and antennas on airframes, missiles, ships, satellites, and ground based communications systems, and as leads for test and instrumentation applications.

As a highly specialized and technically focused company, Times Microwave Systems has been able to continually meet the challenges of specialty engineered transmission lines for both the military and commercial applications, drawing upon our:

- Thousands of unique cable and connector designs
- Exceptional RF and microwave design capability
- Precise material and process controls
- Unique in-house testing capabilities including RF shielding/leakage, vibration, moisture/vapor sealing, phase noise and flammability
- Years of MIL-T-81490, MIL-C-87104, and MIL-PRF-39012 experience
- ISO 9001 Certification

In 2010, Times Microwave Systems introduced its Times-Protect™ line of lightning and surge protection solutions to address the challenging needs of wireless systems in the 21st century.

With over 60 years of Times Microwave Systems aerospace cable and connector technology experience and unparalleled design expertise, Times Microwave Systems' staff of Field Applications Engineers can help to provide the right solution for your interconnect applications.



World Headquarters: 358 Hall Avenue, Wallingford, CT 06492 • Tel: 203-949-8400, 1-800-867-2629 Fax: 203-949-8423

International Sales: 1+ 203-949-8503 • 1+ 800-867-2629

China Sales: TMC Building 4, No. 318 Yuanshan Road, Xinzhuang Industrial Park, Shanghai, China 201108 Tel: 86-21-5176-1209 Fax: 86-21-64424098
www.timesmicrowave.com