75115

CKT SIZE	"A" DIM	"B" DIM	"C" DIM	"D" DIM	"E" DIM	CABLE OD
18	1.320/33.55	.691/17.56	.950/24.13	1.835/46.62	.490/12.45	.310/7.87
28	1.570/39.90	.941/23.91	1.200/30.48	1.835/46.62	.490/12.45	.335/8.51
38	1.820/46.25	1.191/30.26	1.450/36.83	2.270/57.65	.490/12.45	.355/9.02
48	2.070/52.60	1.441/36.61	1.700/43.18	2.478/62.93	.569/14.45	.440/11.18
72	2.670/67.84	2.041/51.85	2.300/58.42	2.741/69.62	.726/18.45	.635/16.13

NOTES:
1. MATERIALS:
   BACKSHELL - ZINC ALLOY DIE CAST, FINISH DULL NICKEL PLATING.
   JACKSCREW - STAINLESS STEEL, FINISH PASSIVATE.
   MOUNTING SCREW - STEEL ALLOY, FINISH CLEAR ZINC PLATING.
2. PLUG CABLE KIT COMPONENTS TO BE BULK PACKAGED PER PK-75115-991.
3. MOUNTING SCREW APPLICATION TORQUE TO BE MIN. 3 lbf-in AND NOT TO EXCEED 4 lbf-in.
5. STRAIN RELIEF IS DESIGNED FOR THE CABLE DIAMETER SPECIFIED IN TABLE ON THIS PAGE. WHEN USING SMALLER CABLE DIAMETER, USE HEAT SHRINK TUBING TO BUILD UP THE CABLE TO THE SPECIFIED DIAMETER.





18 CKT PLUG CABLE KIT

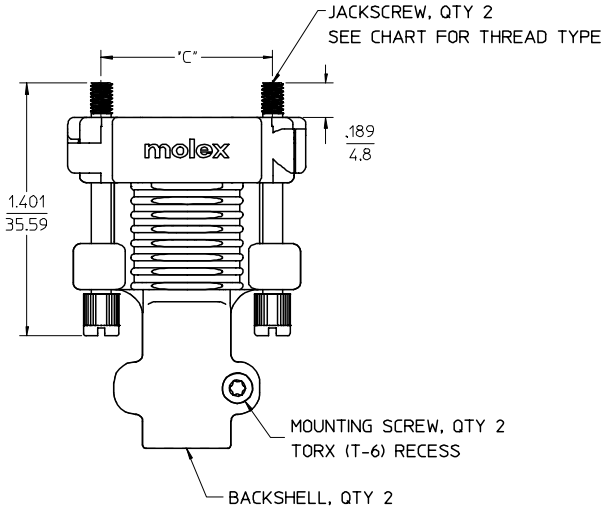



75115-2072	75115-3072	72	X	CONTACT PRODUCT MARKETING
75115-2048	75115-3048	48		
75115-2038	75115-3038	38	X	CONTACT PRODUCT MARKETING
75115-2028	75115-3028	28		
75115-2018	75115-3018	18		
PLUG CABLE KIT (4-40 JACKSCREW)	PLUG CABLE KIT (M3 JACKSCREW)	CIRCUIT SIZE	NOT TOOLED	

MOD JACKSCREW MATERIAL
EC NO: UCP2007-1309
DRWN:MSIBARRA2007/02/27
CHKD:DMORGAN2007/03/05
APPR: SMILLER 2007/03/06
C
DESCRIPTION
REV

QUALITY SYMBOLS
▼ = 0
(C) = 0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± .010
2 PLACES	± 0.25	± ---
1 PLACE	± ---	± ---
ANGULAR ±1/2°		

DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

SCALE 2:1
DESIGN UNITS METRIC
DIMENSION STYLE IN/MM
DRAWN BY TMCCLELL DATE 02/11/06
CHECKED BY TMCCLELL DATE 02/11/07
APPROVED BY BANAKIS DATE 02/11/07

THIRD ANGLE PROJECTION
REVISE ON CAD ONLY

TITLE
SALES DRAWING
TDP PLUG CABLE KIT
DULL NICKEL FINISH

molex MOLEX INCORPORATED

MATERIAL NO. SEE CHART
DOCUMENT NO. SD-75115-002
SHEET NO. 1 OF 1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

C

tb_frame_C-B1
rev. B1 2000/08/01