

OX4550A-D3-0.5-10.000-3.3-7



ELECTRICAL SPECIFICATIONS

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Nominal Frequency	f_0		10.000			MHz
Supply Voltage	V_s	$V_s \pm 5\%$ @ 25°C	3.135	3.3	3.465	V
Input Current	I_s	Steady state, @ 25°C			400	mA
	I_w	During warm-up			1200	mA
Warm-up Time	t_w	$T_a = +25^\circ\text{C}$ within ± 10 ppb of final frequency with reference after 1 hour on			8	min
Frequency Calibration	$\Delta f/f_0$	$T_a = +25^\circ\text{C}$, after 15 min power on, ref to nominal frequency	-200		+200	ppb
Frequency Stability vs. Temperature	$\Delta f/f_0 (T_a)$	$T_a = -40^\circ\text{C} \dots +85^\circ\text{C}$, peak to peak			+10	ppb
Frequency Stability vs. Supply Voltage	$\Delta f/f_0 (\Delta V_{CC})$	$T_a = +25^\circ\text{C}$, $V_s \pm 5\%$	-1		+1	ppb
Frequency Stability vs. Load	$\Delta f/f_0 (T_a)$	$T_a = +25^\circ\text{C}$, $L_C \pm 5\%$	-1		+1	ppb
Aging		After 30 days of operation	Per day	-0.3	+0.3	ppb
			1 st year	-50	+50	ppb
			10 years	-300	+300	ppb
Short Term Stability (Still Air)		$\tau = 1\text{s}$, $T_a = +25^\circ\text{C}$, after power on 1h			0.01	ppb
Control Voltage Range			0.0	1.65	+3.3	V
Frequency Tuning Range		$V_c = 0.0\text{V}$	-2.4		-0.8	ppm
		$V_c = 1.65\text{V}$	-200		+200	ppb
		$V_c = 3.3\text{V}$	+0.8		+2.4	ppm
Slope		Positive	-	-	-	-
Linearity					10	%
Input Impedance			100			k Ω
Operating Temperature Range	T_a		-40		+85	°C
Storage Temperature Range	T_s		-40		+105	°C

OX4550A-D3-0.5-10.000-3.3-7

HCMOS OUTPUT CHARACTERISTICS

PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
Output Levels	VOH	High Level	2.4	2.8		V
	VOL	Low Level			0.4	V
Duty Cycle	DC	load = 15pF, @50% output signal	45		55	%
Rise/Fall Time	t _r /t _f	10% ~ 90% output signal, load = 15pF			5	ns
Load	L _c			15		pF
Spurious	Sp				-70	dBc

PHASE NOISE



PARAMETER	SYMBOL	CONDITION	VALUE			UNIT
			Min.	Typ.	Max.	
@10 Hz Offset	£ (Δf)				-120	dBc/Hz
@100 Hz Offset	£ (Δf)				-140	dBc/Hz
@1k Hz Offset	£ (Δf)				-150	dBc/Hz
@10 kHz Offset	£ (Δf)				-155	dBc/Hz
@100 kHz Offset	£ (Δf)				-155	dBc/Hz

ENVIRONMENTAL AND MECHANICAL CONDITIONS

Drop Test	The test shall be carried out as the provisions of the IEC60028-2-32 test Ed. 10cm height, 3 times on hard board with thickness of 3cm
Bumping Test	Device are bumped to three mutually perpendicular axes at peak acceleration of 400m/s ² , each 4000±10times, 6ms pulse duration time
Vibration Test	Frequency range: 1Hz-4Hz-100Hz-200Hz Acceleration: 0.0001g ² /Hz-0.01g ² /Hz-0.01g ² /Hz-0.001g ² /Hz Grms=1.15g Sweep time: 30 minutes (perpendicular axes each sweep time)
Mechanical Shock	100g, 6mS duration, 1/2 sine wave, 3 shocks each direction along 3 mutually perpendicular planes.
Thermal shock	0.5h@-40°C, 0.5h@+85°C, Note: the changing time < 30 seconds, cycling for 100 times

OX4550A-D3-0.5-10.000-3.3-7

MECHANICAL DIMENSIONS AND PIN FUNCTIONS

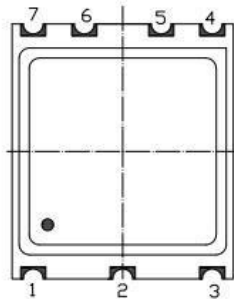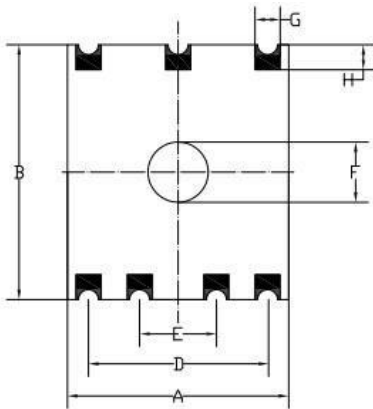


DIMENSIONS (mm)			
	Min	Typ	Max
A	21.7	22.0	22.3
B	25.1	25.4	25.7
C			12.5
D	17.7	17.8	17.9
E	7.5	7.6	7.7
F			6.0
G	2.4	2.5	2.6
H	2.4	2.5	2.6

PIN	SYMBOL	FUNCTION
1	V _c	Voltage Control
2	NC	No Connect
3	V _s	Supply Voltage
4	OUTPUT	RF Output
5	NC	No Connect
6	NC	No Connect
7	GND	Ground

OX4550A-D3-0.5-10.000-3.3-7

REFLOW PROFILE

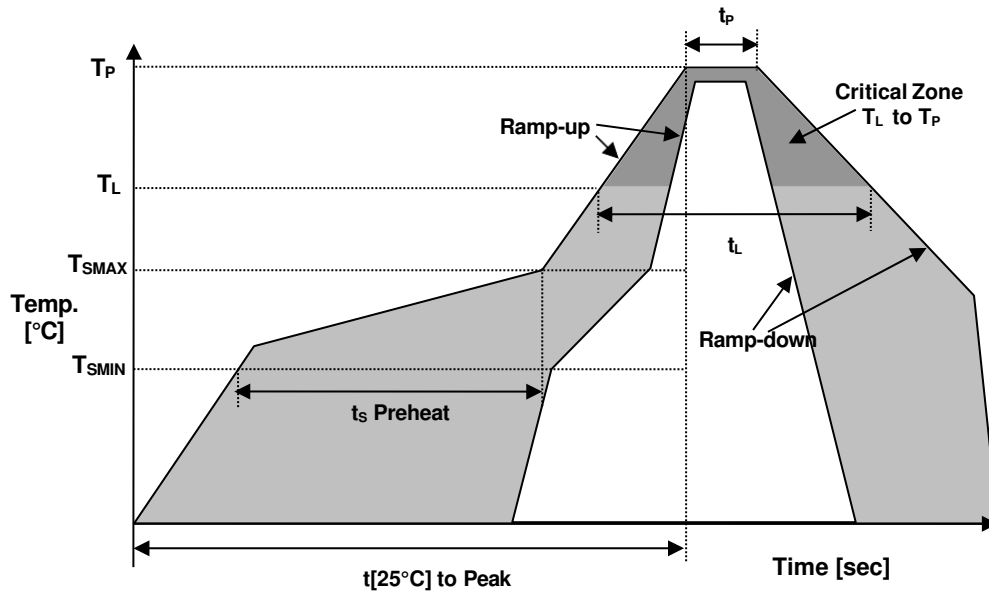

Reflow profile		
Temperature Min Preheat	T_{SMIN}	150°C
Temperature Max Preheat	T_{SMAX}	200°C
Time (T_{SMIN} to T_{SMAX})	t_s	60-180 sec.
Temperature	T_L	217°C
Peak Temperature	T_P	260°C
Ramp-up rate	R_{UP}	3°C/sec max.
Ramp-down rate	R_{DOWN}	6°C/sec max.
Time within 5°C of Peak Temperature	t_p	10 sec.
Time $t[25^\circ\text{C}]$ to Peak Temperature	$t[25^\circ\text{C}]$ to Peak	480 sec.
Time	t_L	60-150 sec.

	Signed	Date
Created	CP	July 18, 2022
Eng. approved	SP	July 18, 2022
REVA		