

ITEM	PART#	DESCRIPTION	QTY	UOM
A	874390300	1.5mm Rcpt Hsg Nyl Nat 3Ckt	1	PC
B	874210000	1.5mm Rcpt Term Crim 2.5Sn	3	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X24AWG DISC SR-PVC BK UL10002	BLACK
A2	--	1X24AWG DISC SR-PVC BK UL10002	BLACK
A3	--	1X24AWG DISC SR-PVC BK UL10002	BLACK

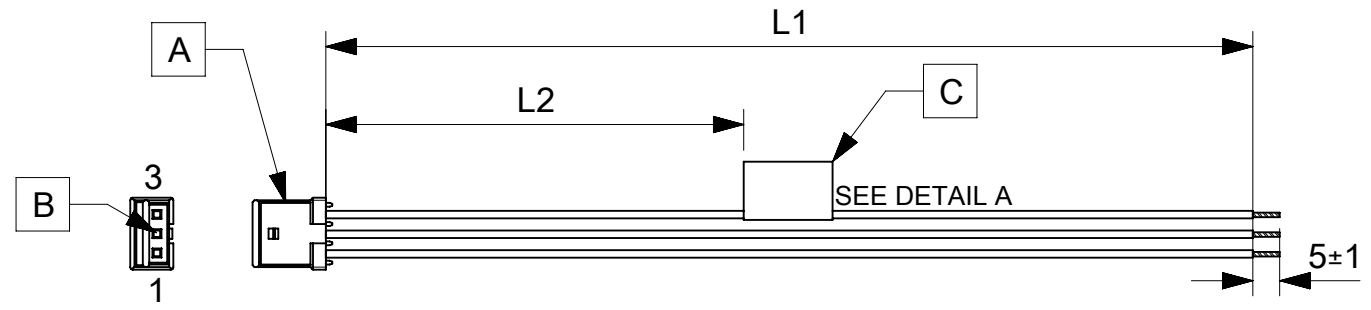


TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2183971030	50±3	13	PICO-SPOX 1.5 R-S 3CKT 50MM DISC Sn
2183971031	100±5	38	PICO-SPOX 1.5 R-S 3CKT 100MM DISC Sn
2183971032	150±8	63	PICO-SPOX 1.5 R-S 3CKT 150MM DISC Sn
2183971033	300±10	138	PICO-SPOX 1.5 R-S 3CKT 300MM DISC Sn
2183971034	600±10	288	PICO-SPOX 1.5 R-S 3CKT 600MM DISC Sn

**NOTES**

- Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning dia must be 0.75mm Max.
- Connector view shown is from mating side.
- Label text must be 2mm max. in height with Arial font.
- Label must be wrapped in Flag type on a single cable.

MOLEX P/N  
MOLEX  
BATCH WK/YR  
DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
27/05/2021	A	INITIAL RELEASE	ARAJU

FUNCTIONAL SYMBOLS $\frac{F}{A} = 0$ $\frac{F}{E} = 0$ $\frac{F}{P} = 0$ DIVISIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		CURRENT REV DESC:		
	DIMENSION UNITS	SCALE	EC NO: 665607		
	mm	NTS	DRWN: ARAJU 2021/05/27		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		CHK'D: RDESAI01 2021/05/31		
ANGULAR TOL ± °		APPR: RDESAI01 2021/05/31		PRODUCT CUSTOMER DRAWING DOCUMENT NUMBER: 2183971030 DOC TYPE: PSD DOC PART: 000 REVISION: A	
4 PLACES ±		INITIAL REVISION:			
3 PLACES ±		DRWN: ARAJU 2021/05/27			
2 PLACES ±		APPR: RDESAI01 2021/05/31			
1 PLACE ±		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NUMBER: SEE TABLE CUSTOMER: GENERAL MARKET SHEET NUMBER: 1 OF 1	
0 PLACES ±		THIRD ANGLE PROJECTION	DRAWING: A4-SIZE		