


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

NOTES:

- SPECIFICATION:
 JACKET: SILICONE. MULTI-LAYER, 1ST LAYER WHITE; 2ND LAYER "COLOR" OD: $.150 \pm .008$ (3.8 mm)
 CONDUCTOR: BARE COPPER, STRANDING 392 x 0.07 mm = 1.50 mm², 15 AWG.
- RATING:
 VOLTAGE: 1,000 V CAT IV PER IEC 61010-031
 CURRENT: 25 A MAX.
 TEMPERATURE: -60° C TO +180° C.
- AVAILABLE IN 3 STANDARD LENGTHS AND 6 COLORS - SEE MODEL NUMBER BELOW.

| REVISIONS | | | |
|-----------|-----------------------------|---------|----------|
| REV. | DESCRIPTIONS | DATE | APPROVED |
| - | CLASS A RELEASED | 7/11/99 | |
| A | UPDATED FORMAT w/ CAGE CODE | 4/18/04 | |

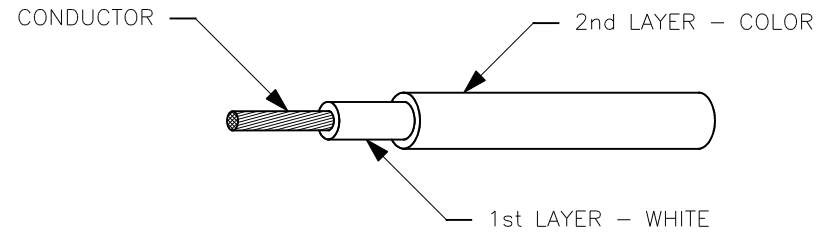

MODEL NUMBER

CT2885-#-XXX

COLOR: 0 - BLACK
 2 - RED
 4 - YELLOW
 5 - GREEN
 6 - BLUE
 9 - WHITE

LENGTH: 10 - 10 m PACKAGE
 50 - 50 m SPOOL
 100 - 100 m SPOOL

| | | | | | | | | |
|------------------------|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|---------|-----------------------------------------------------------------------------------------|--------------|----------------|--------------|
| THIRD ANGLE PROJECTION | | UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ± 1/32 .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING | CONTRACT NO. | | Cal Test Electronics 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610 | | | |
| | | | APPROVALS | DATE | TITLE | | | |
| MATERIAL | | DRAWN | WDH | 7/11/99 | WIRE, TEST LEAD, SILICONE JACKET, 1.50 mm², 15 AWG, 25 A | | | |
| FINISH | | CHECKED | | | SIZE | CAGE CODE | DWG. NO. | REV. |
| NEXT ASSY | USED ON | ENGR. | | | A | 43F45 | P288500 | A |
| APPLICATION | | DESIGN ACTIVITY | | | SCALE | NONE | | SHEET 1 OF 1 |