

т	۵	п	m	0



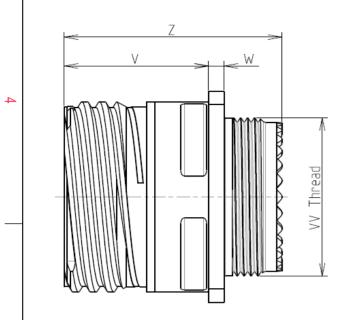

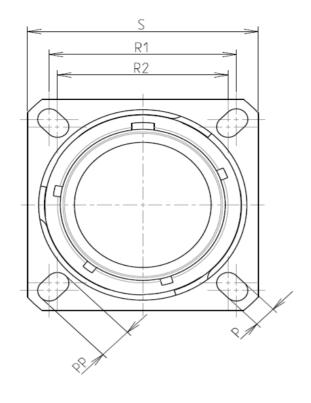

LAYOUT SHOWN AS

Keying Shown as example

CHARACTERISTICS

ယ

 \sim

-Standard : Based on MIL-DTL-38999 Series III

-Shell Material	: Aluminium			
-Shell Plating	: Black Zinc Nickel			
-Insulator	: Thermoplastic			
-Contacts	: Copper Alloy			
-Seals & Grommet	: Silicon Elastomer			
-Contact Plating	: Gold over copper Alloy $0.8 \mu m$ minimum			
-Durability	: 500 Mating cycles			
-Delivered with Souriau contacts and Accessories				
-Temperature Range	-65°C to +175°C			
-Salt Spray	: 500 hours			

: 14.95 g ± 10%


Connector dimension			
Dim	Nominal		
Р	3.25±0.2		
PP	4.93±0.2		
R1	20.62		
R2	18.26		
S	26.2±0.3		
V	20.83+0/-1.25		
W	2.1/2.5		
Z	31.5 Max		
VV THREAD	M15x1-6g		


ORIENTATION : D


CONTACT LAYOUT : 11-01

CONTACT TYPE : SOCKET(500 Matings)

Е



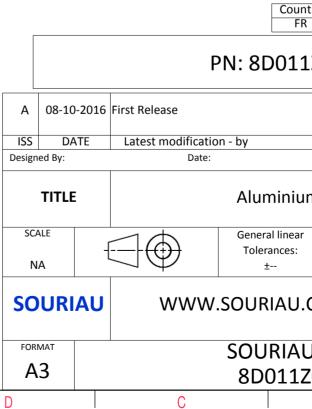

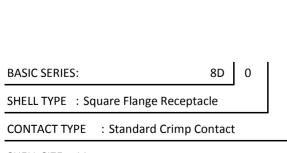

-Mass

SHELL SIZE : 11

PLATING : Z = Black Zinc Nickel

Н

G

11

Ζ

01

S

F

D

σ		A			
S EXAMPLE				3	
any non-conformity or damage which does not comply with of the Parties or by a third party adation, technical notice.)					
Intry Juris R	diction & Cont Not Listed	rol List		2	
1Z01SD					
			MOD N°		
um Receptac	customer drawing n Receptacle 8D series				
ar i	NPRDS / PROJECT				
		59		1	
J.COM This document is the property of SOURIAU it must not be reproduced or communicated without permission					
U DRG N°	1		SHEET		
Z01SD-C		Α	1/2	J	
_	•				

		۵	ار (m		0
		Contact Layout				Panel Cutout
4		01			Λ	SQUARE FLANGE RECEPTACLE (TYPE 0) REAR MOUNTING
	Ctc	1#12 1#101 X Y]		₹ 72	
S	A	0 0]			Dim ØA ØAA R1 ØT
						SOURIAU shall not be liable for any due to a use of the Products whi the Specifications issued by either of (professional recommendati
22						Country FR PN: 8D0112
					A 08-10-20 ISS DATE Designed By:	16 First Release Latest modification - by Date:
_					TITLE SCALE NA	Aluminium General linear Tolerances: ±
					FORMAT A3	J WWW.SOURIAU.CO SOURIAU 8D011Z0
	H	G	F	E	D	C

