


# 3 x 5mm Rectangular

*micro*LED® Optopipe®

# Optical Light Pipe, 4 Array (RJ45 Jack)

Dialight

515-1055

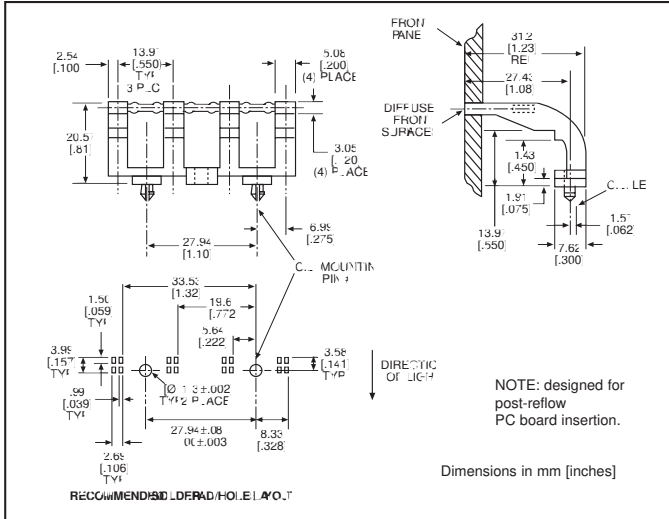

## MicroLED SMT LEDs for use with 515-1055

PART NO.	PAGE #
<b>Recommended</b>	
597-3xx1-1xx	1-19
597-77x1-1xx	1-20
<b>Alternatives</b>	
597-3xxx-4xx	1-27 & 1-28
597-3xx1-4xx	1-28
597-3xx1-5xx	1-30
597-5x11-4xx	1-27
597-5202-4xx	1-27

LED alternatives may not produce optimum light output

Solder Pad/Holes layout shown is for bi-color LEDs listed under "Recommended" category  
Contact factory for other layouts

## Features

- High transmissivity polycarbonate material
- UL94V-0 compliance
- ESD protection (circuit isolation from front panel)
- Wide viewing angle
- Arrays reduce insertion costs
- Secures to PCB by snap-fit

## LED Data

For absolute maximum ratings and other electrical and optical data on the recommended LEDs, refer to LED data sheets.

## Operating/Storage Temperature

-30°C to +100°C

## Dialight Optopipe® Light Pipe Description

This Optopipe® functions as a through-the-case indicator by conducting the light over the top of connectors or switches with a maximum height of 0.550". It is equivalent to the 515-1022 and well suited to applications where vibration is a concern. This Optopipe's® four 3 x 5mm rectangular light emitting surfaces appear bright and are optically well isolated. The light pipe is reliably held in place by 2 snap-fit pins located next to the first and fourth light pipe elements. These pins positively lock onto 0.062" thick PCBs regardless of individual variations in thickness. A textured finish on the 4 light emitting surfaces maximizes the viewing angle. The recommended light sources are Dialight's 597 Series PLCC-2 or PLCC-4 type SMT LEDs. The LEDs are mounted in a straight line on a 0.550" pitch. The light pipe material is water clear transmissive polycarbonate rated UL94-V0, and has a 35% oxygen index.

Dialight can provide custom Optopipe® solutions for your applications.