

Ratings

Voltage: 300 V
 Temperature: -25 ~ 80 °C
 Flammability: VW-1

Conductor

Conductor count: 1
 Gauge: 24 AWG 0.22 mm²
 Material: tinned copper strands
 Strand size: $\varnothing 0.16 \times 11$
 Resistance at 20 °C: 94.2 Ω /km max

Insulator

Material: PVC
 Color: white
 Diameter: $\varnothing 1.4 \pm 0.10$ mm
 Nominal thickness: 0.38 mm
 Resistance at 20 °C: 10 M Ω /km min

Shield

Type: spiral
 Material: tinned copper strands
 Stranding: $\varnothing 0.1 \times 47$
 Coverage: 90% minimum


Outer jacket

Material: PVC
 Color: black
 Diameter: $\varnothing 2.6 \pm 0.15$ mm
 Nominal thickness: 0.50 mm

Wire marking: E339579 UL AWM STYLE 1185 24 AWG 80°C
 300V VW-1 --- cUL AWM I A 80°C 300V FT1 TENSILITY

Tests

Insulation tensile strength: 2.11 kgf/mm²
 Jacket tensile strength: 1.05 kgf/mm²
 After aging at 113 ± 2 °C for 7 days:
 Minimum tensile strength 70 % original
 Minimum elongation 65 % original
 Heat shock: 121 ± 1 °C /1 hour, no observed degradation
 Deformation: 121 ± 1 °C /1 hour, ≤ 50 %
 Cold bend: -10 ± 2 °C /1 hour, no observed cracking

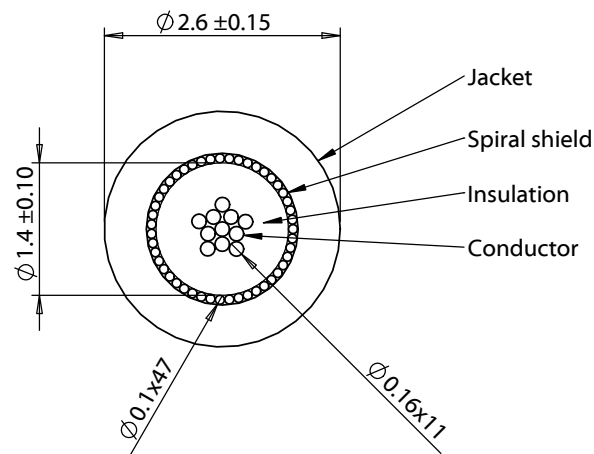

Revision:	Date:	Description:	Prepared:	Notes:	TENSILITY
A	06/20/2014	Initial release	JP <small>Digitally signed by JP Date: 2018.09.06 16:50:29 -07'00'</small>		
A1	09/06/2018	Increased operating temperature range	Verified:	Function test: no open, no short circuit, no intermittent	tel 1.541.323.3228 800 877.670.7118 fax 1.541.323.4202 web tensility.com
			PS <small>Digitally signed by PS Date: 2018.09.06 17:01:12 -07'00'</small>		Description:
			Dimensions are in millimeters. Tolerances:	Wire, 1C TS, 24 AWG, UL1185, 300V, 80C, 2.6 mm, shielded, VW-1, PVC	A 30-00344
			X: ± 0.5 mm X.X: ± 0.3 mm X.XX: ± 0.05 mm		Scale: 12:1 Sheet 1 of 1

5

4

3

2

1