

# PSD-S AE SM8-6 102DB/1 - Acoustic element



2702997

<https://www.phoenixcontact.com/us/products/2702997>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.

Siren element, 8 tones, 24 V AC/DC, max. 102 dB(A), tones selectable by DIP switch, black



## Product description

This audible signal element is designed as a component of a modular signal tower. According to your requirements, a signal tower may comprise any combination of up to five signal elements. You may use up to five optical signal elements or up to four optical and one audible signal element. Only use an audible signal element as the top element. A bayonet locking system establishes the mechanical and electrical connection between the elements. Connection elements with spring-cage or screw connection can be used for electrical connection of the signal tower. Mounting elements for base or tube mounting can be used to mount the signal tower. Please note that PSD-S signal towers (70 mm diameter) are not mechanically compatible with PSD-S 50 signal towers (50 mm diameter).

## Your advantages

- Multi-tone siren signaling depending on the situation
- Eight tone functions can be set via DIP switches
- Adjustable volume
- Min. volume of 92 dB(A)
- Continuous tone with periodically increasing tone frequency (sweep: 1 kHz to 3.5 kHz)

## Commercial data

Item number	2702997
Packing unit	1 pc
Minimum order quantity	1 pc
Sales key	DR07
Product key	DRL113
Catalog page	Page 519 (C-6-2019)
GTIN	4055626492063
Weight per piece (including packing)	92.4 g
Weight per piece (excluding packing)	92.4 g
Customs tariff number	85318070
Country of origin	DE

# PSD-S AE SM8-6 102DB/1 - Acoustic element



2702997

<https://www.phoenixcontact.com/us/products/2702997>

## Technical data

### Product properties

Product type	Acoustic element
--------------	------------------


### Electrical properties

Maximum power dissipation for nominal condition	0.72 W
---	--------

#### General

Input voltage	24 V AC/DC $\pm 10$ %
Nominal input voltage range	21.6 V AC/DC ... 26.4 V AC/DC
Maximum inrush current	max. 250 mA
Current consumption	30 mA
Operating time	100 %
Service life electrical	min. 5,000 h
Type of acoustic signal	8 tones, adjustable volume
Signal frequency	approx. 20 Hz (Trill tone)
	approx. 420 Hz (Hum tone)
	approx. 3.5 kHz (Continuous tone with periodically increasing tone frequency (sweep: 1 kHz to 3.5 kHz))
Tone frequency	approx. 2.8 kHz
Volume	max. 102 dB (Continuous and pulse tone at 2.8 kHz)

### Dimensions

Dimensional drawing	
Height	54 mm
Diameter	70 mm

### Material specifications

Color	black
Material	Polycarbonate PC

### Environmental and real-life conditions

#### Ambient conditions

Degree of protection	IP65, when installed
Ambient temperature (operation)	-30 °C ... 50 °C

### EMC data

# PSD-S AE SM8-6 102DB/1 - Acoustic element



2702997

<https://www.phoenixcontact.com/us/products/2702997>

Electromagnetic compatibility	Conformance with EMC Directive 2014/30/EU
-------------------------------	---

## Mounting

Mounting position	any
-------------------	-----

# PSD-S AE SM8-6 102DB/1 - Acoustic element




2702997

<https://www.phoenixcontact.com/us/products/2702997>

## Drawings

Dimensional drawing

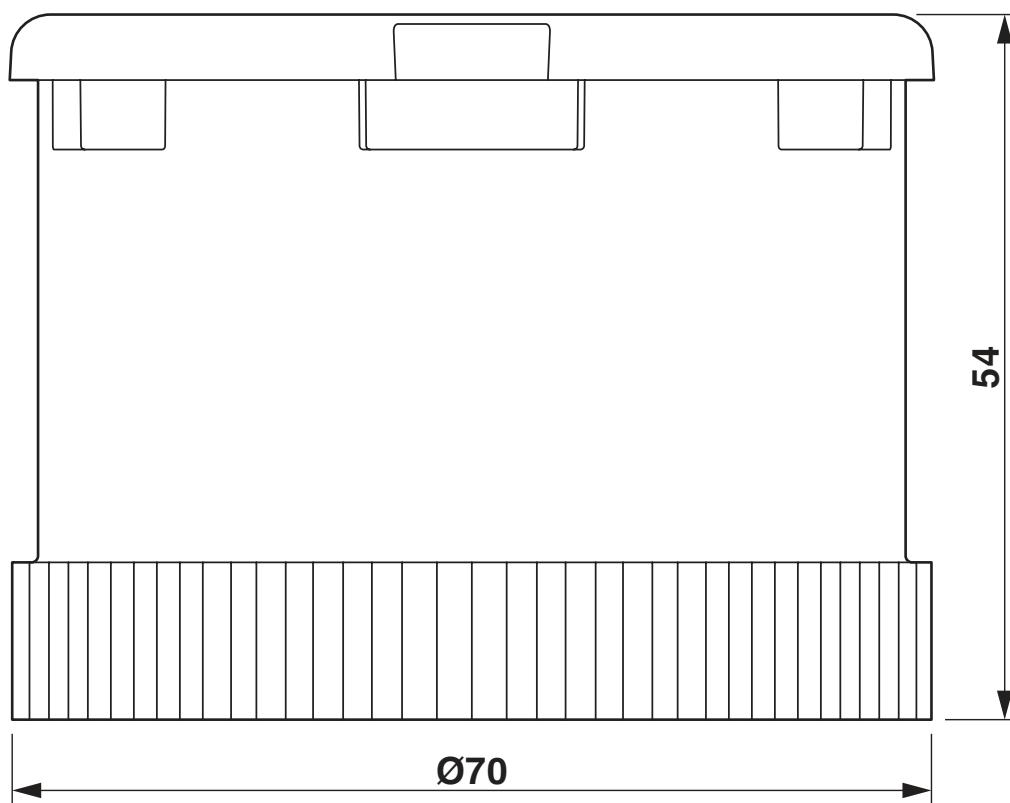

# PSD-S AE SM8-6 102DB/1 - Acoustic element



2702997

<https://www.phoenixcontact.com/us/products/2702997>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/2702997>



**EAC**

Approval ID: RU \*-DE.A\*30.B.00237



**UL Listed**

Approval ID: FILE E 123528



**cUL Listed**

Approval ID: FILE E 123528

**cULus Listed**

# PSD-S AE SM8-6 102DB/1 - Acoustic element



2702997

<https://www.phoenixcontact.com/us/products/2702997>

## Classifications

### ECLASS

ECLASS-11.0	27371237
ECLASS-12.0	27371237
ECLASS-13.0	27371237

### ETIM

ETIM 8.0	EC001261
----------	----------

### UNSPSC

UNSPSC 21.0	46171600
-------------	----------

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)