


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	3/22/21	
A		UPDATE DIM.	6/10/21	JJ

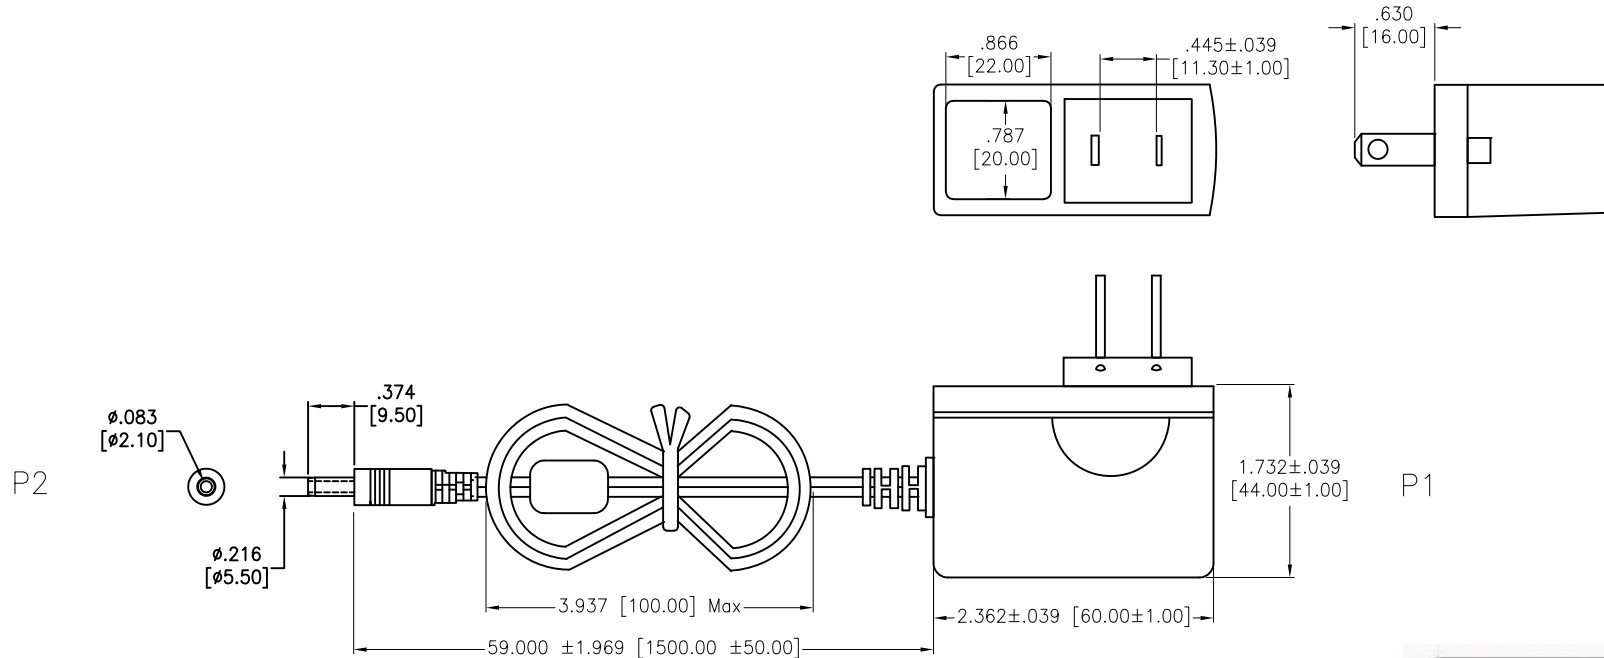

SPECIFICATIONS:

Connector
 P1: Power Adapter, NEMA 1-15P
 P2: DC Plug, W/Strain Relief, 5.5*2.1*9.5mm
 Overmold Color: Black

CABLE:
 UL2468: 18AWG, Jacket Color: Black

Electrical:
 Input:
 Voltage: 100Vac to 240Vac
 Current: 0.35A Max. @ 90~264Vac input & max load
 Frequency: 50Hz / 60Hz

Output:
 Voltage: 5V dc
 Current: 2.5A max.
 Line Regulation: ±5%

Fire rating: UL94V-0
 Line Load Regulation-Output Rate: 5V, 2.5A
 Insulator Resistance: 10 Mohms min @ 500VDC
 Dielectric Strength(Hi-pot): 3000V AC For 1 Minute
 Leakage Current: 0.25mAmax.@ 230Vac/50Hz
 Temperature Rating:

Operating Temperature: 0°C to +40°C
 Storage Temperature: -40°C to +70°C

Environmental:
 Lead free, RoHS compliant.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]. TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	ØX	±.10
.XX	± .020	ØXX	±.015
.XXX	± .015	ØXXX	±.010

ADAM TECH

909 Rahway Avenue,
 Union, NJ 07083
 Phone: 908-687-5000
 Fax: 908-687-5710

DRAWN	WX	3/22/21
CHECKED	AC	3/22/21
APPROVED		

TITLE
POWER ADAPTER TO DC PLUG, 5 VOLT, 2.5AMP, COLOR BLACK, UL2468 18AWG, 5.5X2.1X9.5MM

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY AND SHOULD NOT BE USED WITHOUT PRIOR WRITTEN PERMISSION FROM ADAM TECH

SIZE	PART NO.	REV.
X	PA-012	A

REF: _____ SCALE: NTS SHEET 1 OF 1