

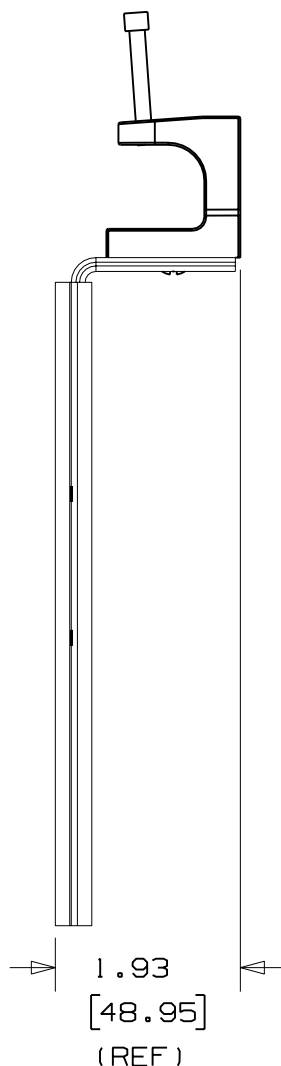


PANDUIT PART NO.	PRODUCT WORKS WITH PANDUIT PART NUMBERS:	APPLICATION SURFACE:	WEIGHT lbs / 10 (g) / pcs.
JMSBCB87-1-_-	JMJH2 JMOD CABLE SUPPORT JMCB JMOD CHAINING BRACKET	BEAMS UP TO 0.75" (19.05mm) THICK	4.70 (2135)

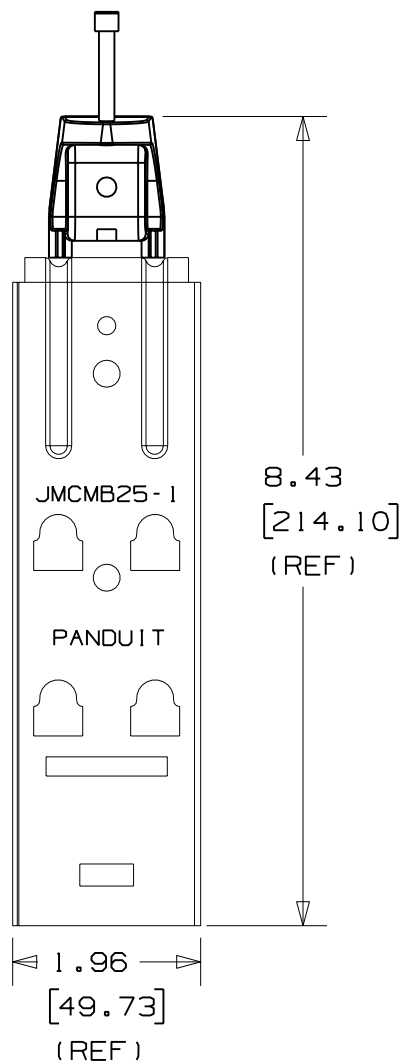

NOTES:

- SEE CURRENT PRICE SHEET FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE.
- SCREW USED TO ATTACH THE BEAM CLAMP TO THE METAL BRACKET CAN BE LOOSENEED ALLOWING USER TO VARY INSTALLED ANGLE. AFTER BEAM CLAMP HAS BEEN ROTATED TO THE DESIRED ANGLE, USER SHOULD RE-TIGHTEN THE SCREW.
- ASSEMBLY COMPONENT MATERIALS:
 - PRE-GLAVANIZED STEEL (JMCMB25-1)
 - ZINC PLATED STEEL (BOLT)
 - MALLEABLE IRON (BEAM CLAMP)
- RATED STATIC LOAD:
180 lbs. (81.65kg)
- JMSBCB87-1 WILL ACCEPT TWO JMJH2 J HOOK PRODUCTS.

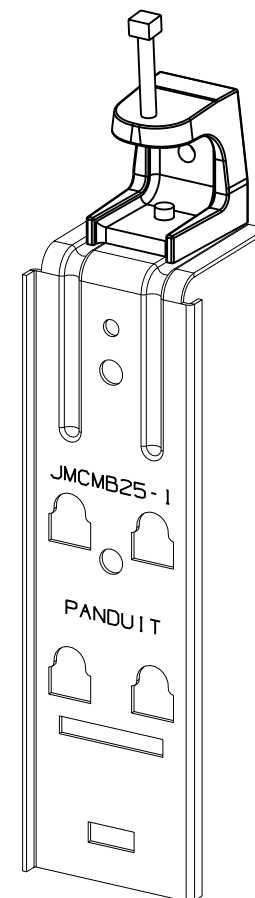

DIMENSIONS IN BRACKETS ARE METRIC [mm]

CAD FILENAME/LAYERS

G02672DT_PS_JMSBCB871_01

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

JMOD BEAM CLAMP
BRACKET ASSEMBLY
(JMSBCB87-1-_-)UNLESS OTHERWISE SPECIFIED,
DIMENSIONAL TOLERANCES ARE:(.X) ±0.05 (1.31 (.XXX) ±0.010 (0.25)
(.XX) ±0.02 (0.51) ANGLES ±5°

UNLESS OTHERWISE SPECIFIED,

ALL DIMENSIONS ARE GIVEN

IN INCHES, THIRD ANGLE PROJECTION.

DRAWN BY

JAD

MAT'L:

SCALE

NONE

DATE

3/7/03

SEE NOTE 3

DRAWING NO.

GB2672DT

DWG

A
SIZE

I	2/20/06	JAD		UP DATE APPLICATION SURFACE CALLOUT- WAS .88"	GB2722DT	I			
REV	DATE	BY	CHK	DESCRIPTION	ECN	- R	CUST	SUP	