


REVISIONS			
SYM	DESCRIPTION	DATE	APPROVED
NC	NEW RELEASE PER E.O. P19720	4-21-08	ADD

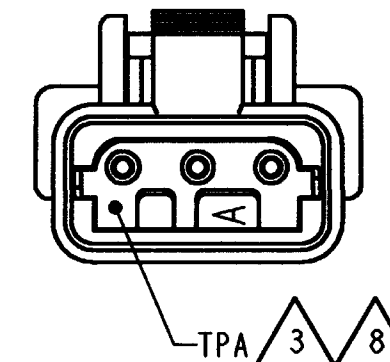

- 8 SEE SHEET 2 FOR OTHER KEY ARRANGEMENTS.
- 7. PLUG IS RATED AT 150°C.
- 6. MATERIAL - HOUSING: PLASTIC, GROMMET: RUBBER.
- 5. THIS PLUG MATES WITH DTMH04-3P* AND DTM04-3P* RECEPTACLE. (* = A,B,C,D KEYS)
- 4 FOR CONTACT AND WIRE PERFORMANCE AND APPLICATION CHARACTERISTICS SEE ENVELOPE DRAWING 0425-015-0000.
- 3 TERMINAL POSITION ASSURANCE (TPA) LOCK PRE-MOUNTED: WMH-3S*. (* = A,B,C,D KEYS)
- 2. ALL DIMENSIONS ARE ±.025 [0.64].
- 1. ALL DIMENSIONS ARE IN INCHES [mm].

NOTES: UNLESS OTHERWISE SPECIFIED






CONTACT SIZE	MIN. INSUL. O.D.	MAX. INSUL. O.D.	WIRE RANGE [mm ²] REF ONLY
20	.053 [1.35]	.120 [3.05]	16-20 AWG [1.0-0.5]

SIGNATURE & DATE	
DR	J. APOSTOL 07DEC2007
CHK	R. MIGA 4/16/08
PE	D. Whitaker 4/16/08
APPD	D. Meyer 4/16/08
SCALE	NONE WT

PLUG
3 PIN CONTACT
SIZE 20
COLOR: BLACK
DTMH SERIES
ENVELOPE


EP 180	MATL. CODE
3850 INDUSTRIAL AVE. HEMET, CA 92545	
DEUTSCH INDUSTRIAL	
B	DTMH06-3S*
DWG SIZE	CODE 11139 SHEET 1 OF 2

REV NC	DTMH06-3S*	REVISIONS			
		SYM	DESCRIPTION	DATE	APPROVED
		NC	SEE SHEET 1	4-21-08	<i>[Signature]</i>

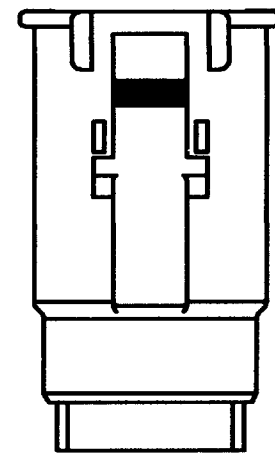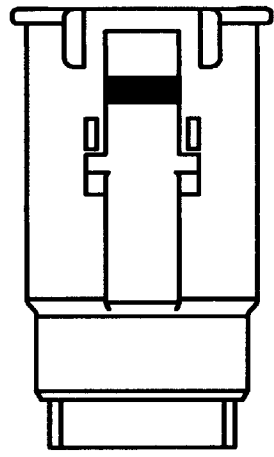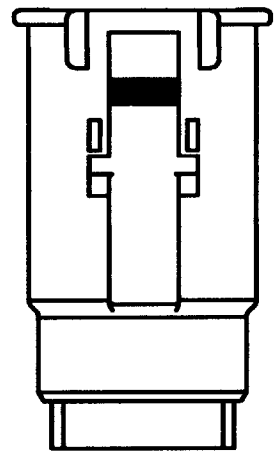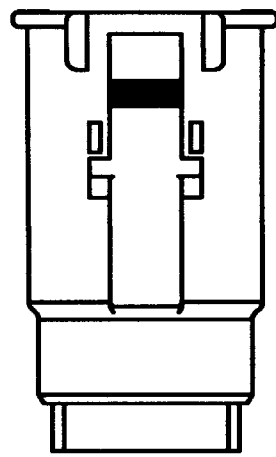


KEYWAY

DTMH06-3A
-A- KEY
TPA COLOR: GREY




KEYWAY

DTMH06-3B
-B- KEY
TPA COLOR: BLACK



KEYWAY

DTMH06-3C
-C- KEY
TPA COLOR: GREEN



KEYWAY

DTMH06-3D
-D- KEY
TPA COLOR: BROWN

NOTES:

SIGNATURE & DATE	
DR	J. APOSTOL 07DEC2007
CHK	<i>[Signature]</i> 4/16/08
PE	<i>[Signature]</i> 2/27/08
APPD	<i>[Signature]</i> 2/26/08
SCALE	NONE WT

PLUG
3 PIN CONTACT
SIZE 20
COLOR: BLACK
DTMH SERIES
ENVELOPE

EP 180	MATL. CODE
3850 INDUSTRIAL AVE. HEMET, CA 92545 DEUTSCH INDUSTRIAL	
B	DTMH06-3S*
DWG SIZE	CODE 11139 SHEET 2 OF 2