

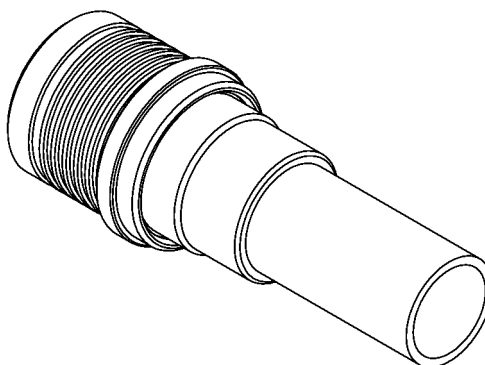



PAGE 1/2	ISSUE 15-05-15B	SERIES QMA	PART NUMBER R123075200
----------	-----------------	-------------------	-------------------------------

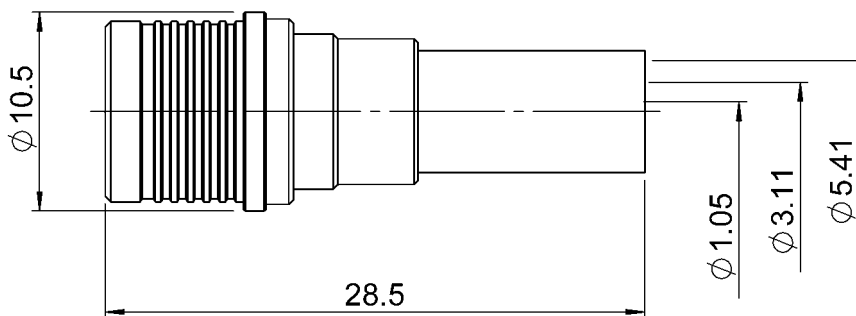

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
Body	BRASS	BBR
Center contact	BRASS	NPGR
Outer contact	BRONZE	BBR
Insulator	PTFE	
Gasket		
Others parts	BRASS	BBR
-	-	-
-	-	-

PAGE 2/2	ISSUE 15-05-15B	SERIES QMA	PART NUMBER R123075200
----------	-----------------	------------	------------------------

PACKAGING

Standard	Unit	Other
100	Contact us	Contact us

ELECTRICAL CHARACTERISTICS

Impedance	50	Ω
Frequency	0-6	GHz
VSWR	T.B.D + 0.0000	x F(GHz) Maxi
Insertion loss	T.B.D	√F(GHz) dB Maxi
RF leakage	- (80	- F(GHz)) dB Maxi
Voltage rating	335	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	5000	MΩ mini

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating End	18	N mini
Axial force – Opposite end	18	N mini
Torque	NA	N.cm mini
Recommended torque		
Mating	NA	N.cm
Panel nut	NA	N.cm
Clamp nut	NA	N.cm
A/F clamp nut	0.0000	mm
Mating life	100	Cycles mini
Weight	6.6470	g

ENVIRONMENTAL

Operating temperature	-40/+105	°C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

SPECIFICATION

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	3.3	6.3	11.1	0	7.8	0

Assembly instruction: **Crimp 02***

Recommended cable(s)

RG 58
KX 15
RG 141
AEP-195FR
LMR 195

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off	180	N mini
- torque	NA	N.cm

TOOLING

Part Number	Description	Hexagon
R282223000	CRIMPING TOOL	5.41
R282281000	CRIMPING TOOL	2x4 (Pos. 7)
R282967015	POSITIONER FOR CRIMPING TOOL	

OTHER CHARACTERISTICS

RF leakage(interf.): 3<F<6GHz>70dB
***prior to step two of Crimp 02, slide disk insulator onto center conductor, and bottom contact on disk insulator**