


© - TE Connectivity. All Rights Reserved.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	D1	REV PER ECN-22-156403	06JUN2022	RK	CSD

AMP
WIRE RANGE

26 AWG
STRANDED

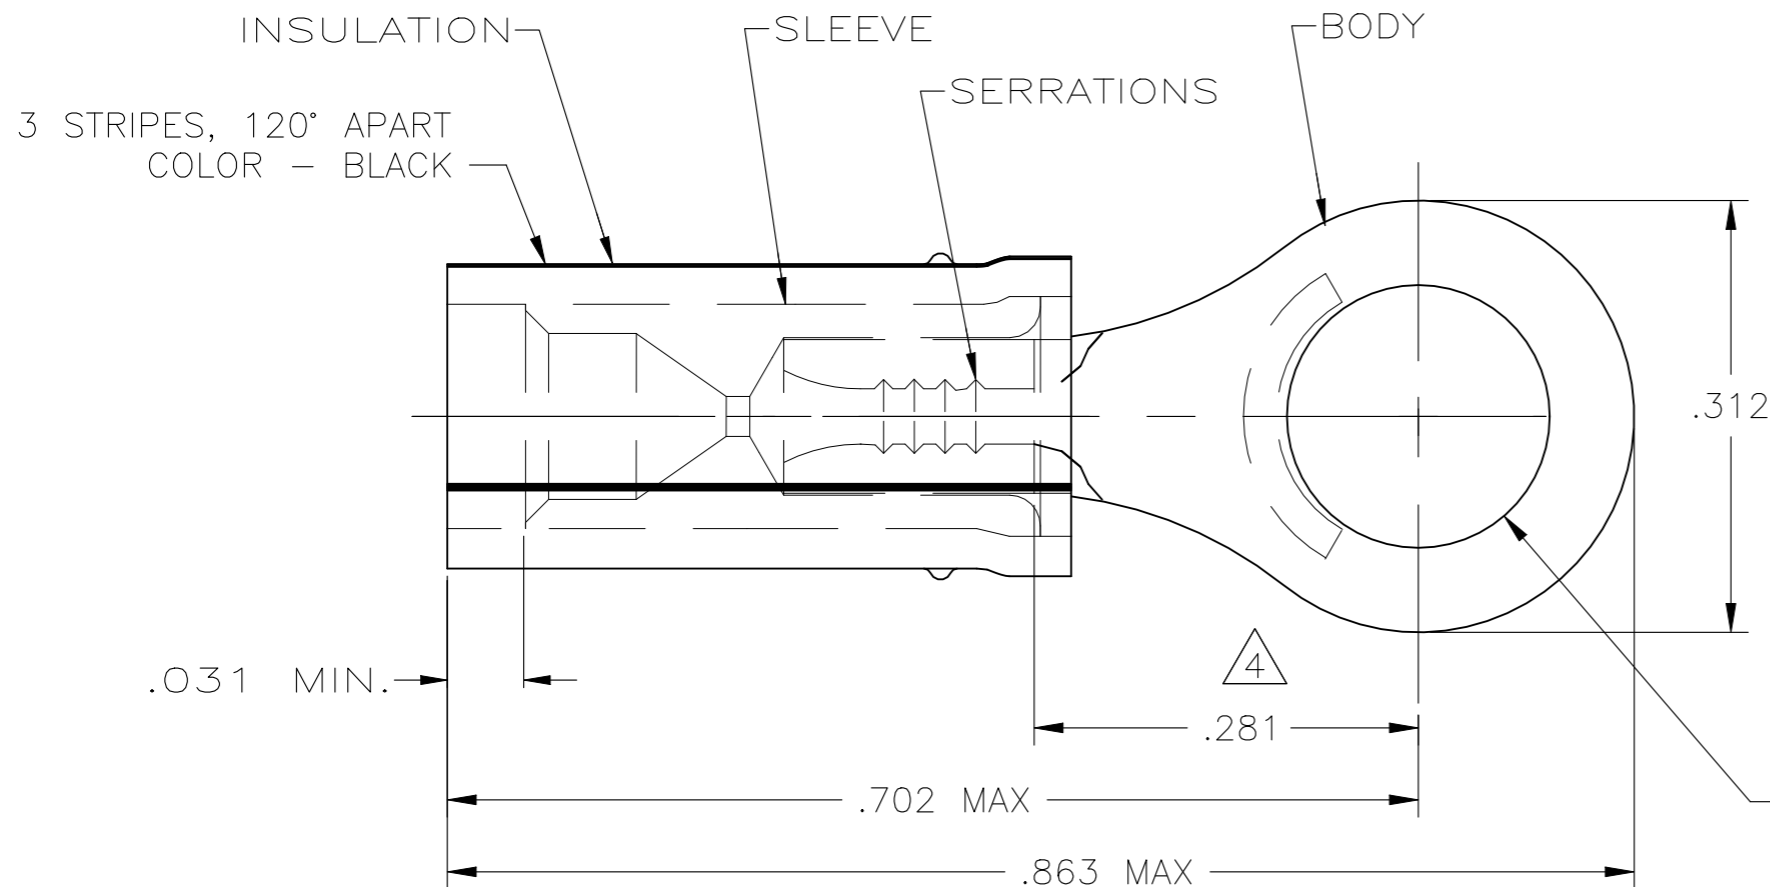

1. TONGUE MATERIAL THK: .027±.001
 2. FOR .026 TO .055 WIRE INS. OD.
 3. MUST BE CRIMPED WITH 22-18 OR 22-16 PIDG (RED) TOOL.
- △4 APPLIED FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
 - △5 BODY & SLEEVE: CU PER ASTM B152 INSULATION: NYLON, COLOR - YELLOW
 - △6 BODY; TIN PLATE PER ASTM B545 SLEEVE: NI PLATE PER QQ-N-290

M7928/1-5 CLASS 1	1	WIRE TERMINAL	53052
MILITARY P/N AND CLASS	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED CUSTOMER SERVICE SYSTEMS	
FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]
VOLTAGE RATING: 300V MAX
CIRCULAR MIL AREA: 0.12-0.15mm² [238-304] STRANDED

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± .008
	3 PLC ± -
	4 PLC ± -
	ANGLES ± -
MATERIAL	FINISH
△5	△6

DWN	JR RUTH	28OCT08
CHK	TOM MICHIELUTTI	28OCT08
APVD	TOM MICHIELUTTI	28OCT08
PRODUCT SPEC	-	
APPLICATION SPEC	-	
WEIGHT	-	

STE TE Connectivity			
NAME: TERMINAL, PIDG, RING TONGUE, INSULATION RESTRICTING WIRE SIZE: 26			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-53052	-
CUSTOMER DRAWING		SCALE 8:1	SHEET 1 OF 1 REV D1