



A FLEXIBLE APPROACH TO PORTABLE CRIMPING

# INTRODUCTION TO TOOLING SOLUTIONS

### **TE Connectivity. A Leader in Crimp Quality.**

Anyone can make a tool to crimp terminals onto a wire. But not everyone can manufacture a tool to crimp the terminals properly. Crimp termination of wires isn't easy. At least, doing it right isn't easy. We know. We started it. TE Connectivity developed the technology of hand crimping over 70 years ago.


### The Secret to a Successful Crimp.


Matching the Terminal to the Tooling - Among the many factors that are critical in producing a quality crimp, matching the terminal to the tooling is crucial. Unlike inferior tooling options, TE Connectivity offers engineered solutions that are designed to match the exact crimp geometry of the terminal to be applied on the wire. To create a proper crimp you need to follow these important steps:


- 1. Wire Selection AWG and wire insulation thickness varies from wire to wire. Just because two wires are listed at the same AWG, it doesn't mean their insulation thickness is the same. If you don't take into account both factors, the copper or aluminum strands may not fit in the wire barrel correctly or the terminal's insulation support may be too large or small for the wire strand.
- **2. Wire Prep** In order to properly place a wire in a terminal, the wire insulation must first be stripped to the proper length based on the terminal specifications. If the insulation is cut too short, or too long the wire will not be seated properly into the wire barrel, causing terminal separations or shorting.
- **3. Crimp Specifications** To create a proper crimp for a TE connector or terminal you should use a TE Connectivity tooling solution that is specifically engineered to the proper Crimp Height, Width and Crimp Geometry of the selected terminal or contact.














# INTRODUCTION TO TOOLING SOLUTIONS

### What You Need to Know About TE Hand Tools

#### **Tool Grade**

Tool grade is a prime consideration when choosing the appropriate tool for an application. Our portable tooling is categorized into three levels: Service, Commercial and Premium. The higher the grade of the tool, the less operator skill is required to repeatedly meet the specified parameters of the crimp.

### **Premium (CERTI-CRIMP Tool)**

Premium tools include the appropriate crimp die configuration, integral locating, and integral straightening features that permit terminals or contacts crimped in these tools to meet all feature requirements in applicable TEC application (114-) specifications. Most premium tools include an adjustable insulation crimp height feature and the CERTI-CRIMP ratcheting feature, set at the factory, which prevents the ratchet from releasing until the wire crimp jaws bottom within .001. This helps provide consistent repeatability of the crimp. Premium hand tools require the least amount of user dexterity.

### **Commercial (PRO-CRIMPER III Tool)**

Commercial die assemblies are designed to meet the wire crimp height requirements per the applicable TEC application (114-) specifications. Other feature requirements may or may not be met. Commercial handle assemblies permit the interchange of die assemblies and an adjustable ratcheting feature. Users are responsible for adjusting the ratchet to obtain the correct crimp height. Commercial tools require a greater amount of user dexterity than Premium crimp tools.

#### **Service**

Service tools are generally single thickness, stamped tools. They are not intended to meet any specifications and require a higher level of user dexterity to obtain acceptable results.



### **Tool Type**

Choosing a tool type may be driven by several factors: simply by type preference, or by the application needs itself, i.e. heavy duty crimp, industry specification requirements, etc. The overall wire range is also a key consideration when choosing the appropriate tool for an application. Often there will be several tools referenced to the same product which have different wire ranges.

### **Standard Die Envelope (SDE)**


### **FAST FACTS**

- Dies meet wire crimp requirements per specification
- Over 100 interchangeable SDE die sets for crimping over 4,000 different connectors
- Ability to handle multiple wire and terminal sizes in one die set



Standard Die Envelope (SDE) technology is a flexible approach to crimp tooling, that allows use of the same dies on tooling across a range of application platforms. Dies are interchangeable in tools from portable hand tools — manual or battery-powered — to pneumatic hand tools and electric bench terminators. It's a family of tools that you can take from bench to production or into the field, without the need for dies fitted to each kind of tool. They're suited for R & D, networking applications and on-site maintenance work.

Customers can be sure their dies will fit their long-term needs, because they are completely compatible with all tools in the SDE system. They move with a customer as their needs grow.

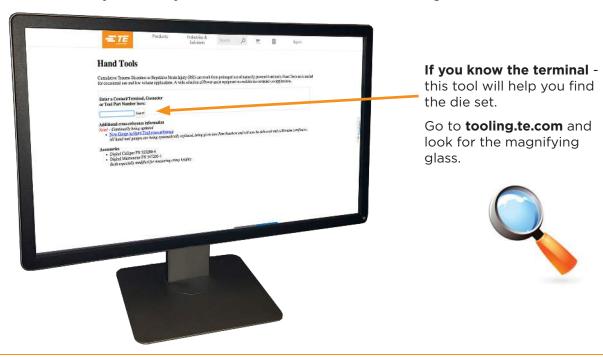

### **Standard Die Envelope (SDE)**



### **Commercial Standard Die Envelope (SDE) Manual Hands Tools**

### **FAST FACTS**

- Ratchet control provides complete crimping cycle
- Emergency ratchet release
- Angled head provides a comfortable hand and wrist position
- One tool with over 75 interchangeable die sets can crimp many different types of connectors
- Accommodates multiple terminal sizes in one die set
- Precision construction of durable high-carbon steel
- Extra strength pivot pins provide greater
- Produced under a quality management system certified to ISO 9001



### A Flexible Tooling Approach

Our commercial hand tools provide the versatility of general-purpose service tools along with the reliability and ease of use of many premium-grade tools. For versatility, all 75 die sets are interchangeable, including those for open-barrel contacts and terminals. Additionally, many of these die sets have multiple cavities for crimping a variety of contact or terminal sizes.

### **PRO-CRIMPER III - Made to Last**

For reliability, the tool is constructed of durable high carbon steel with extra strength pivot pins. And, for user convenience, the PRO-CRIMPER III hand tool particularly excels.

### **Characteristics of a Commercial Crimping Tool**

Every Commercial grade hand tool incorporates features for long lasting performance and ease-of-use. They include ergonomic handle designs and a ratchet control system designed to create a proper crimp.

### **Ratchet System for Improved Repeatability**


Ratchet control is provided for complete crimp cycling; this helps eliminate partial crimps. Also, an emergency ratchet release allows the user to open the tool jaws at any time during the crimp cycle.

### **Applying the Crimp Force**

To reduce handle force, the linkage was designed to match the forces required to crimp our largest insulated terminal. The result is dramatically less handle force than comparable tools. Also, the angled head and specially designed handles reduce hand stretch and provide comfortable operation.

### **Ensuring a Proper Crimp**

Locators are mounted on pin-and-socket style tools. They help properly locate the contact in the die set, provide a wire stop, and help minimize contact rotation and bending during crimping.

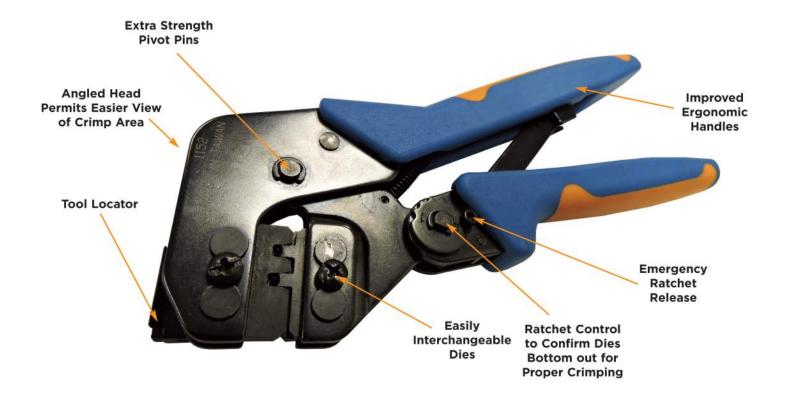

### **Commercial SDE Tooling Options**

## PRO-CRIMPER III Hand Tool Part No. 354940-1 (frame only)

The PRO-CRIMPER III hand tool is ideally suited for R&D prototyping, networking applications, and commercial, industrial, and institutional maintenance work.

- Enhanced ergonomics, with a thin, comfortable handle profile
- Manufactured with precision stamping that permits close tolerance controls on critical parts, for better performance and repeatability
- Improved tool geometry for a longer life, stronger tool frame
- Fits industry's largest selection of crimp die options



### SDE SA Hand Tool Part No. 9-1478240-0 (frame only)

The unique geometry of this tool results in a comfortable, easy-to-use handle design that is unmatched in the market.

- Large crimp jaw arc, minimizing roll in open barrel applications
- Easy accessibility for space-constrained applications
- User-adjustable ratchet control and emergency ratchet release



### ERGOCRIMP Hand Tool Part No. 539635-1

- Interchangeable dies
- Virtually a straight action jaw closure
- Ratchet mechanism ensures complete crimp cycle
- Easy access ratchet release
- Handle pressure adjustment with locking device
- Ergonomic non-slip handles



## **TOOL KITS**

### **TOOL KITS**

#### **FAST FACTS**

- Portability
- Customization
- Cost effectiveness
- OEM personalization
- Flexibility in the factory as well as in service and repair garages.
- Consist of well-proven hand tools and dies as well as accessories matched to special applications
- A selection of sample terminals enables the technician to start work immediately

In addition to providing standard kits, TE Connectivity is also able to provide custom kits for volume requirements containing only tools, or a combination of tools, dies and terminals tailored to your specific requirements.

The kit shown is an example designed specifically for the Automotive Industry. However, we can also provide kits for promotion and product support as well as application support and repair.

The flexibility in creation of these individual kits enables the customer to help both control and ensure quality.



#### **PRO-CRIMPER Hand Tool Kits**

TE Specialty hand tools are available in convenient kits that contain the tooling, terminations, and spare parts you need for your crimping operations.

## PRO-CRIMPER III Hand Tool PIDG and PLASTI-GRIP Terminal Kit Part No. 55823-1

Includes hand tool (part no. 58433-3), 225 insulated ring and spade terminals in 12-10, 16-14 and 22-16 AWG [3.0-5.0, 1.3-2.0 and 0.3-1.3 mm<sup>2</sup>] wire sizes.

### BNC Premises Wiring Kit Part No. 58477-1

Includes hand tool (part no. 58433-1); plugs—5 RG-58, 10 RG-59/62, 5 RG-58 plenum and RG-59/62 plenum sizes; adapters —2 jack-to-jack and 2 T.

### PRO-CRIMPER III Hand Tool Repair Kit Part No. 679221-1

Includes retaining rings, handle return spring, pawl spring, pivot pins, pawl pin, ratchet pawl, die pins, nut and die set screws.

### **Tooling-to-Terminal Cross Reference**



UNINSULATED TERMINALS	Wire Range AWG mm²		Max. Insul. Dia.		Hand Tools Commercial	Tool Type Commercial	
	22-16	0.3 - 1.23	-	-	58546-1	PC	
SOLISTRAD Terminals and Splices	22-16	1.25 - 2	-	-	58546-1	PC	
Spinees	22-16	3 - 5	-	-	58546-1	PC	

INSULATED TERMINALS	Wire Range		Ma	х.	Hand Tools	Tool Type	
	AWG	mm²	Insul.	Dia.	Commercial	Commercial	
PIDG FASTON	22-18	0.3-0.8	.100	2.54	58433-3	PC	
Receptacles (640900 Series)	16-14	1.25-2	.170	4.32	58433-3	PC	
PIDG	22-16	0.3-1.25	.125	3.18	58433-3	PC	
Terminals and Splices, PLASTI-GRIP Terminals	16-14	1.25-2	.150	3.81	58433-3	PC	

FULLY-INSULATED TERMINALS	Wire Range AWG mm²		Ma Insul.	Dia.	Hand Tools Commercial	Tool Type Commercial	
Ultra-Fast FASTON	22-18	0.3-0.8	.230	5.84	58628-1	PC	
Tabs and Receptacles	16-14	1.25-2	.260	6.60	58628-1	PC	

### **Tooling-to-Terminal Cross Reference**

OPEN BARREL TERMINALS	Style	Wir	Wire Range		ax	Hand Tools	Tool Type	
	Style	AWG	mm²	Insul.	Dia.	Premium	Premium	
AMPLIMITE	Size 20 DF Contacts	28-24	0.08-0.2	.040	1.02	58448-2	PC	
D-Sub. Connectors		24-20	0.2-0.5	.060	1.52			
	Size 22 DF Contacts	28-22	0.08-0.3	.040	1.02	90800-1	PC	
AMPMODU	Mod. IV Contacts	26-22	0.12-0.3	.061	1.55	58641-1	PC	
Connectors	Mod. IA Colleges	24-20	0.2-0.5	.069	1.75	-	-	
•		28-24	0.08-0.2	.055	1.40	-	-	
	Type II Contacts	24-20	0.2-0.6	.062	1.57	58541-1	PC	
		18-16	0.8-1.4	_	_	58541-1	PC	
		14	2	_	-	58541-1	PC	
		30-26	0.05-0.15	.060	1.52	-	_	
		26-24	0.12-0.2	.055	1.40	58495-1	PC	
CPC Connectors,		24-20	0.2-0.6	.080	2.03	58495-1	PC	
M Series Connectors	Type III+ Contacts	24-20	0.2-0.6	.100	2.54	-	-	
		24-20	0.2-0.6	.120	3.05	-	-	
	*	18-16	0.8-1.25	.100	2.54	58495-1	PC	
		18-14	0.8-2	.100	2.54	-	-	
FASTON		22-18	0.3-0.8	.130	3.30	_	_	
Straight Receptables	250 Series	18-14	0.8-2	.170	4.32	58524-1	PC	
(Premier Line Only)	₹	14-10	2-5	.200	5.08	58525-1	PC	
		30-22	0.05-0.3	.075	1.91	_	_	
	Commercial Contacts	24-18	0.2-0.8	.100	2.54	90574-1	PC	
NOSS	7	20-14	0.5-2	.130	3.30	90575-1	PC	
1200		24-18	0.2-0.8	.100	2.54	90548-1	PC	
MATE-N-LOK	Universal &	20-14	0.5-2	.130	3.30	90546-1	PC	
Connectors	Universal II Contacts	20-18	0.5-0.8	.200	5.08	90547-1	PC	
		16-14	1.25-2	.200	5.08	90547-1	PC	
4	Mini-Universal	20-16	0.5-1.25	.126	3.20	90760-1	PC	
		26-22	0.12-0.3	.069	1.75	90758-1	PC	
	Mini-Universal II	22-18	0.3-0.8	.094	2.39	90759-1	PC	
	Contacts	20-16	0.5-1.25	.126	3.20	58707-1	PC	
		22-20	0.3-0.6	.106	2.70	2217267-1	SDE-SA	
Power Triple Lock	Power Triple Lock	20-16	0.6-1.25	.130	3.30	2217208-1	SDE-SA	
Connectors		18-14	0.9-2.1	.146	3.70	2217266-1	SDE-SA	
		12	3.3	.167	4.25	2217268-1	SDE-SA	



### Let's Connect

To learn more about Commercial Manual hand tooling or our comprehensive bundle of tooling solutions please call us at **717-810-2082** or email us at

### Toolingsales@te.com

### TE Technical Support Center

USA: 1.800.522.6752 UK: +44.0800.267666 Canada: 1.800.522.6752 France: +33.1.34.20.8686 Mexico: +52.55.1106.0800 Netherlands: +31.73.624.6999 Latin/S. America +54.11.4733.2200 China: +86.400.820.6015 +49.6151.607.1999 Germany:













### Add Power to Your Production.



If your production needs require the need for fast, mobile hand tools that can help eliminate the hand fatigue from performing manual crimps, consider maximizing the power of our Lithium-Ion battery crimp tools. Many of our Lithium-Ion battery powered crimp tools utilize the same interchangeable die sets found

in our Premium and Commercial hand tool lines, thereby speeding up your production capacity without the need for purchasing new die sets. For purchasing options go to Tooling.te.com and search for catalog number 1-1773859-6.



### Waste Not. Want Not.

Whether it's time or scrap, in manufacturing everyone knows that waste costs money. With our on-site certification and consultation services, we can help you:

- · Reduce downtime
- Reduce scrap
- Maintain crimp quality
- Improve manufacturing efficiency

Connect with us today to learn more.

- E-mail: <u>fieldservicesnorthamerica@te.com</u>
- Phone: 800-722-1111 or 717-986-3434
- For additional information download catalog number 1-1307619-0 from Tooling.te.com.

### tooling.te.com

1-1773865-2 / O6-18 © 2018 TE Connectivity Ltd. family of companies. All Rights Reserved. AMPLIMITE, AMPMODU, CERTI-CRIMP, CERTI-LOK, ERGOCRIMP, FASTON, MATE-N-LOK, PLASTI-GRIP, Power Triple Lock, SOLISTRAND, TE Connectivity and TE connectivity (logo) are trademarks.

Other product and/or crimping names herein might be trademarks of their respective owners.

In the interest of continuous improvement, TE reserves the right to modify, discontinue or replace any products.

