

COIL: @ 25°C	
RESISTANCE	50 OHMS ±10%
NOMINAL VOLTAGE	5.0 VDC
MUST OPERATE	2.7 VDC
MUST RELEASE	1.4 VDC MAX, 0.22 VDC MIN.


ENVIRONMENT:	
VIBRATION	10 CPS TO 3000 CPS @ 30 g's
SHOCK	75 g's 6 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C

NOTES:	OPERATE TIME 2.0 MS MAX
	RELEASE TIME 1.5 MS MAX
	CONTACT TIME 1.5 MS MAX.

CUST. C.I.	
CUST. NO. STANDARD	REV.

SMGA RELAY

CUSTOMER DATA SHEET

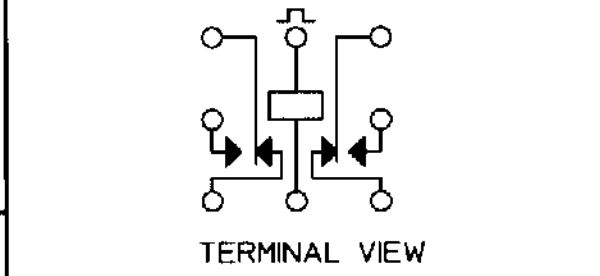

CONTACT RATING: LOW LEVEL TO 1 AMP
28 VDC RESISTIVE 100,000 OPERATIONS

DR. B.D. 11/17/99 CK. *[Signature]* 11/17/99

COMMUNICATIONS INSTRUMENTS, INC.

SMGA-5