TE Internal #: 2-2064140-3

Rugged Fiber Cable Assemblies, Fiber Optic Cable (FOCAB) ODC, .


21 in [5.5 mm] Diameter, 2 Fibers, Black, Blue, Black Cable, ODC

Boot Type (Left)

View on TE.com >



Fiber Optics > Fiber Optic Cable Assemblies > Rugged Fiber Cable Assemblies

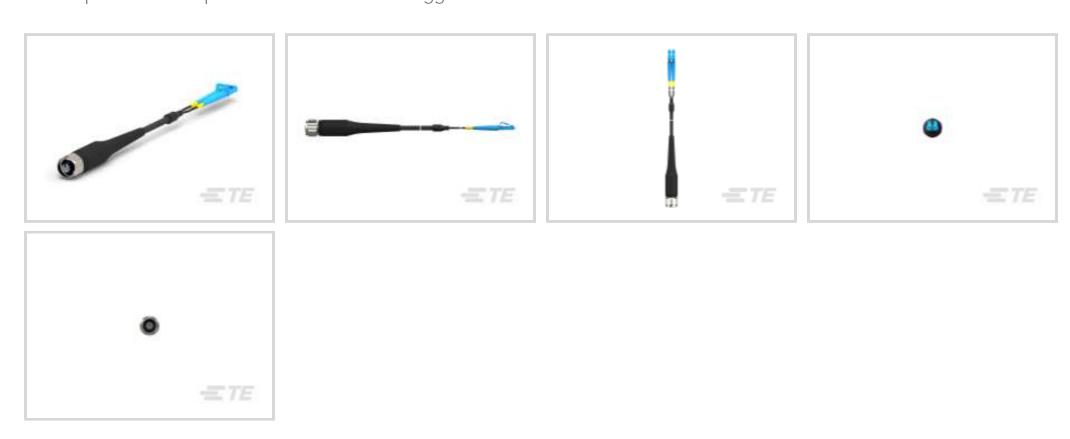

Fiber Optic Cable Type: Fiber Optic Cable (FOCAB) ODC

Cable Assembly Fiber Diameter: 9/125 µm
Outside Cable Diameter: 5.5 mm [ .21 in ]

Number of Fibers: 2

Connector Color (End A): Black

## **Features**

## Product Type Features

Rugged Fiber Cable Assembly System	FullAXS
Fiber Optic Cable Type	Fiber Optic Cable (FOCAB) ODC
Fiber Optic Mode	Singlemode
Connector Type (End A)	ODC Plug
Connector Type (End B)	LC DUAL Plug
Cable Assembly Type	ODC to LC DUAL
Fiber Type	SM
Configuration Features	
Number of Fibers	2
Cable Buffering	Buffered
Body Features	
Connector Color (End A)	Black
Connector Color (End B)	Blue



Boot Type (Left)	ODC
Boot Type (Right)	Bend Limiting
Boot Color (Left)	Black
Boot Color (Right)	Blue
Dimensions	
Cable Assembly Fiber Diameter	9/125 μm
Outside Cable Diameter	5.5 mm[.21 in]
Other	
Cable Assembly Length	23 m

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Pb (3.7% in Component part) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	Not Yet Reviewed for halogen content
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**






## Customers Also Bought










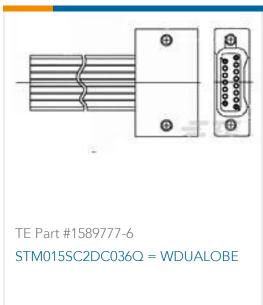





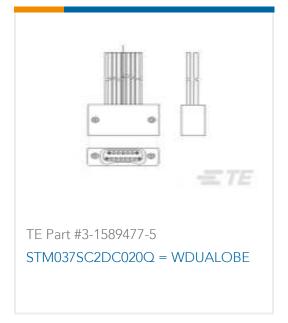





## **Documents**

**Product Drawings** 

FOSM ODC LEAD 5.5 2PLUG-LC/PC

English

**CAD Files** 

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_2-2064140-3\_C.2d\_dxf.zip



English

**Customer View Model** 

ENG\_CVM\_CVM\_2-2064140-3\_C.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_2-2064140-3\_C.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**Application Specification** 

English