
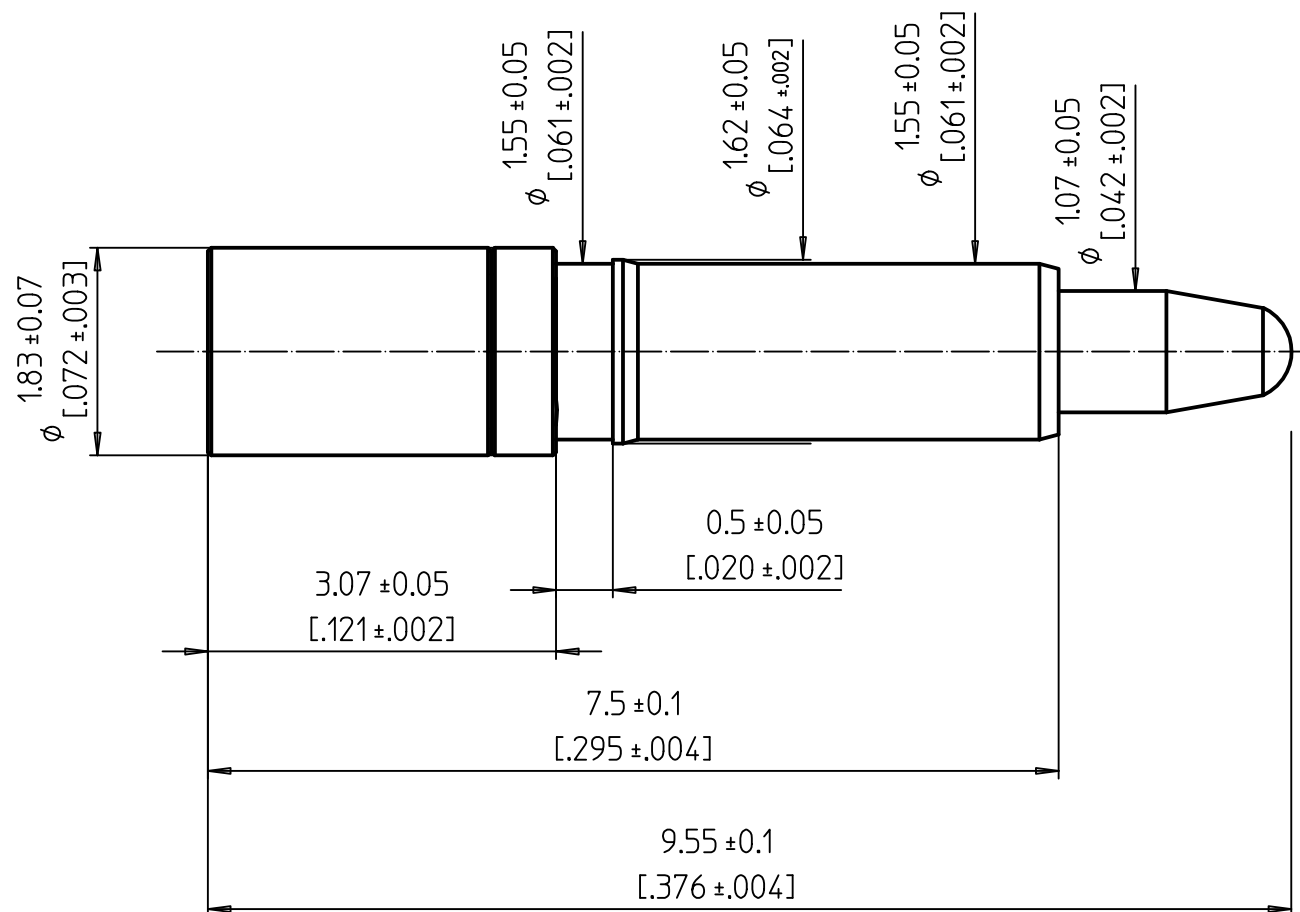


Spring Loaded Contacts
With PRECI-DIP Integrated CLIP

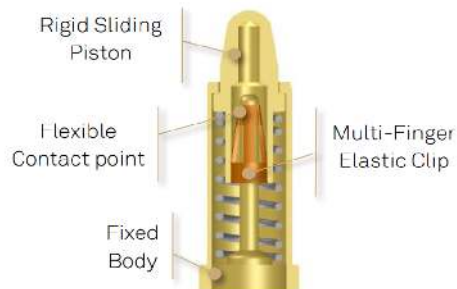

NOTES:

MECHANICAL REQUIREMENTS:

Durability: 20'000 cycles at Hnom
Working stroke between H1 and H2 : 1.4mm [.055']
Spring forces (F):

Finit= 0.50 N at Hinit= 9.55 mm [.376']
F1= 0.57 N at H1= 9.35 mm [.368']
Fnom= 0.82±0.15 N at Hnom= 8.65 mm [.340']
F2= 1.00 N at H2= 7.95 mm [.312']

Recommended working range: between H1 and H2
Forces are measured in mean value of compression / decompression
* Theoretical values of spring design

ELECTRICAL REQUIREMENTS:

Contact resistance:
R= 30 mOhms max in static mode at Hnom
Current per individual contact in free air at ambient temperature:
ICont= 5 A at Hnom with temperature raise max 30°C

ENVIRONMENTAL REQUIREMENTS:

Operating temperature: -25 °C / +125 °C
Storage temperature: -40 °C / +125 °C
Relative humidity: 5% / 95%

MATERIALS / PLATINGS:

Contact interfaces plated with 0.5 µm [20µ'] gold over Nickel
Spring: Stainless steel
Clip : Beryllium Copper

SOLDERING :

Recommended PCB pad size : 2.0 mm [.078']
Solderability J-STD-002A. Test A 245°C, 5s, solder alloy SnAg3.8Cu0.7
Resistance to soldering heat J-STD-020C, 260°C, 20S

INSULATOR :

If assembling pin into moulding :
Recommended hole size : $\phi 1.58$ [.062']

Series 0900-CLIP
High Reliability
Spring Loaded Contact



Remplace:

Remplacé par:

15:1

Dessiné

07.02.2022

C.Bidault

Contrôlé

N° dessin

Révision

0907-6-CLIP

P2