
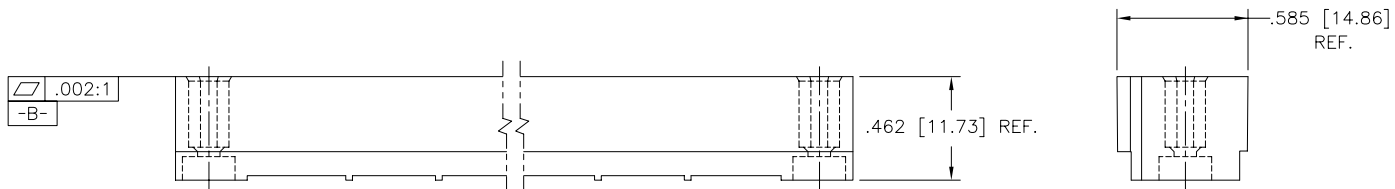


PRODUCT NUMBER
SEE NOTE 1

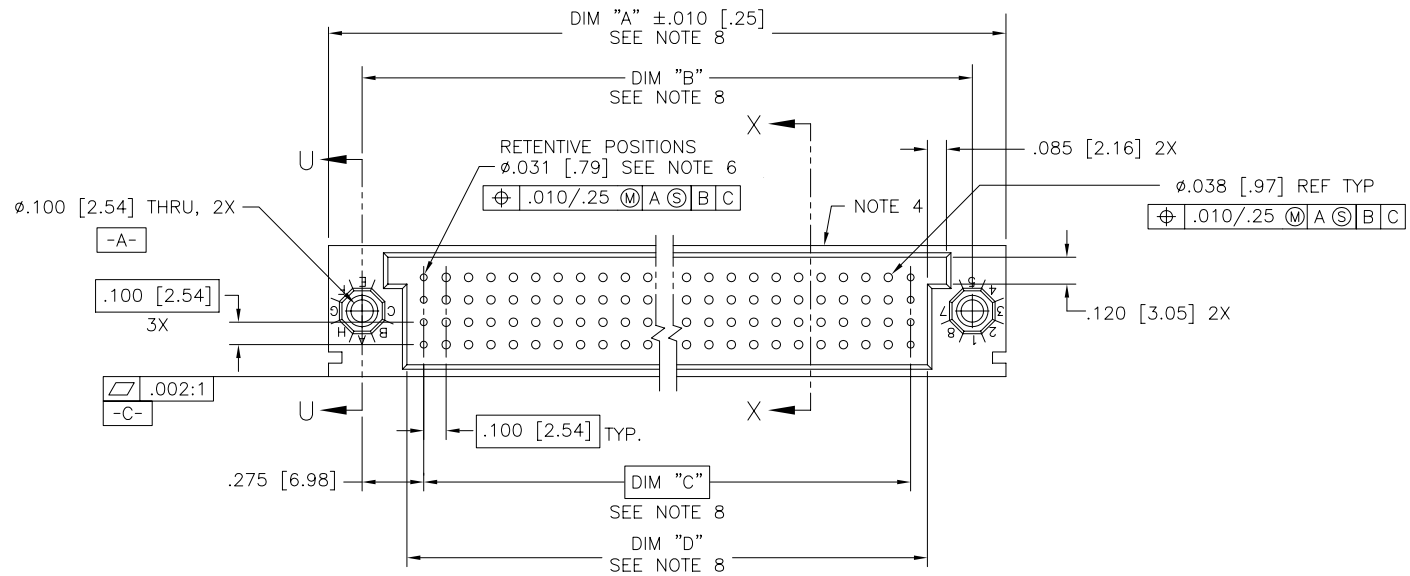


FCI
FCIconnect.com

Copyright FCI


mat'l. code NOTE 3		surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection ⊕		product family HPC	
ltr		ecn no		dr date		tolerances unless otherwise specified		title	
E	V41077	GAH	7/6/94	angles	linear	.xx±.01/.3	INCH/MM	VERTICAL SHROUD-RETENTIVE 4 ROW W/O GUIDE PINS	
F	V94440	JWS	12/29/99			.xxx±.005/.13	scale 1:1	dwg no	
G	V10135	LSS	01/11/01	0'±2'		.xxxx±.0020/.05		sheet 1 of 4 size	
H	V10917	JRW	2/23/01	dr	D.SHEAFFER	8/7/91	FCI	50431	
J	V21712	DAI	12/04/02	engr	S.CLARK	10/23/91		A3	
K	V05-0698	DAI	8/18/05	chr	S.CLARK	10/23/91		type Product Customer Drawing	
L	M06-0260	MHT	7/07/06	appd	S.CLARK	10/23/91			
sheet index	revision	L	L	L	L	L			
	sheet	1	2	3	4				

form: A3

PRODUCT NUMBER
SEE NOTE 1



SECTION U-U

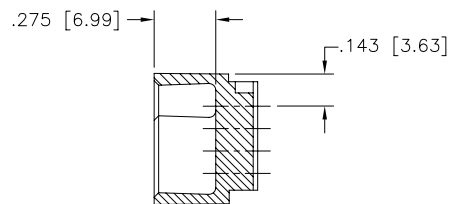

SECTION X-X

NOTES:

- ① PRODUCT NUMBERING CODE:
50431-X YYY X LF
- LEAD FREE (OPTIONAL)
 - ALWAYS "X"
 - NO. OF POSITIONS (SEE NOTE 2)
 - ALWAYS "X"
 - BASE NUMBER

SEE SHEET 3 FOR 50431-XX001 OR 50431-XX001LF.
SEE SHEET 4 FOR 50431-XX002 OR 50431-XX002LF.

- ② THIS PRODUCT IS CONFIGURED IN SIZES OF 6 THRU 80 COLUMNS IN INCREMENTS OF ONE.
i.e.: 6, 7, 8, 9,.....79, 80.
- ③ MATERIAL: GLASS AND MINERAL FILLED THERMOPLASTIC FLAME RETARDANT PER UL94 V-0. COLOR: BLACK
- ④ MANUFACTURE'S NAME, P/N, AND LOT CODE TO APPEAR ON THIS SURFACE.
5. THIS SHROUD WILL WITHSTAND EXPOSURE TO 260° C PEAK TEMPERATURE FOR 10-30 SECONDS IN A CONVECTION, INFRA-RED OR VAPOR PHASE REFLOW OVEN.
- ⑥ DIMENSION APPLIES TO HOLES AT END COLUMNS OF EACH PIN FIELD.
- ⑦ THIS PRODUCT (WITH "LF" SUFFIX) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

⑧ LENGTH FORMULAS

- DIM A = .100/2.54 x NO. OF COLUMNS + .75/19.1
- DIM B = .100/2.54 x NO. OF COLUMNS + .450/11.43
- DIM C = .100/2.54 x NO. OF COLUMNS - .100/2.54
- DIM D = .100/2.54 x NO. OF COLUMNS + .050/1.27

mat'l. code		surface		tolerance		projection		product family	
NOTE 3		ISO 1302 ✓		ISO 406 ISO 1101				HPC	
ltr	ecn	no	dr	date	tolerances unless otherwise specified		title		
L					angles	.XX±.01/.3	VERTICAL SHROUD-RETENTIVE		
					linear	.XXX±.005/.13	4 ROW W/O GUIDE PINS		
					0'±2'	.XXX±.0020/.051	scale 1:1		
			dr	D.SHEAFFER	8/7/91			dwg no	
			enr	S.CLARK	10/23/91			sheet 2 of 4 size	
			chr	S.CLARK	10/23/91			50431	
			appd	S.CLARK	10/23/91			A3	
sheet index	revision sheet							type	
								Product Customer Drawing	

