
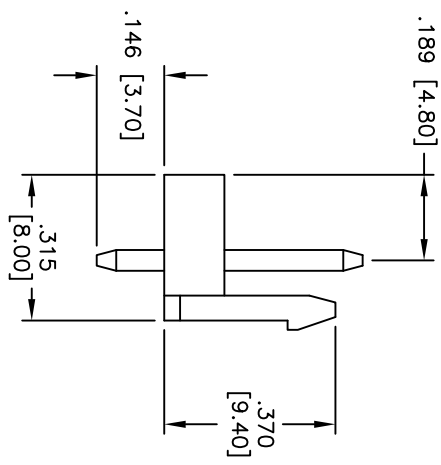
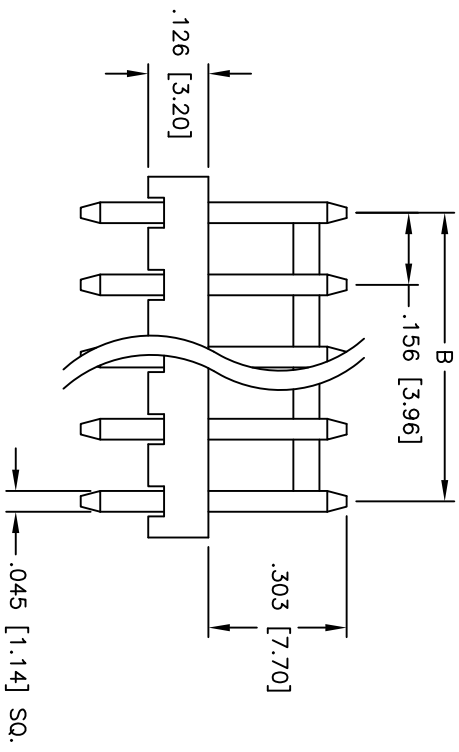
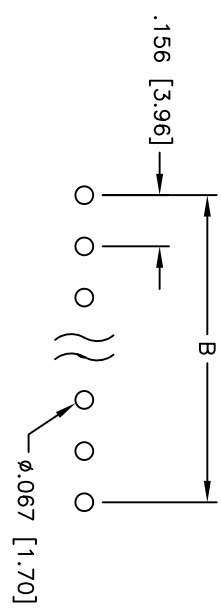


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/14/09	

APPROVED: _____
 DATE: _____ TITLE: _____

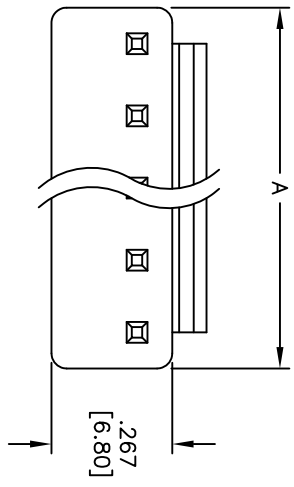

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-2
 Insulator color: White
 Contacts: Brass
 Plating:
 Tin over Copper underplate overall

Electrical:
 Operating voltage: 250 VAC max
 Current rating: 7 Amps max

Insulation resistance: 20 mohms max
 Dielectric withstanding voltage: 1,500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant

Positions: 2 thru 12
 A = .156 [3.96] x No. of Positions
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES

.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXX	± .010

DRAWN		SS	1/4/09	TITLE		.156 [3.96] POWER HEADER STRAIGHT, WITH REAR LOCK	
CHECKED				SIZE	PART NO.	LHC-XX-TS	
APPROVED				REF:	SCALE: NTS	SHEET 1 OF 1	REV.

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

