



Tolerances 1-20=+/-0.2 20-30=+/-0.3 30-40=+/-0.4 40-50=+/-0.5 50-100=+/-0.75 100-300=+/-1.5 Angles=+/-1 Dimensions are in Millimeters	Revisions	Approved	Date
	Description/Approved/Date	M.H.	Date
		Checked	Date
		M.H.	Date
		Drawn	Date
		T.J.A.	
NOTES (plating thickness in micro-inches): 1. Per QQ-B-626 2. Per QQ-S-764 3. Per QQ-C-530 4. Per QQ-B-750 5. Per MIL-P-19468 6. Per ZZ-R-765 7. Per WW-T-799 8. Gold pl. 5 min. over nickel pl. 50 min. over copper strike 9. Nickel pl. 100 min. over copper strike 10. Per QQ-P-35 11. Gold pl. 5 min. over nickel pl. 50 min. over copper strike			

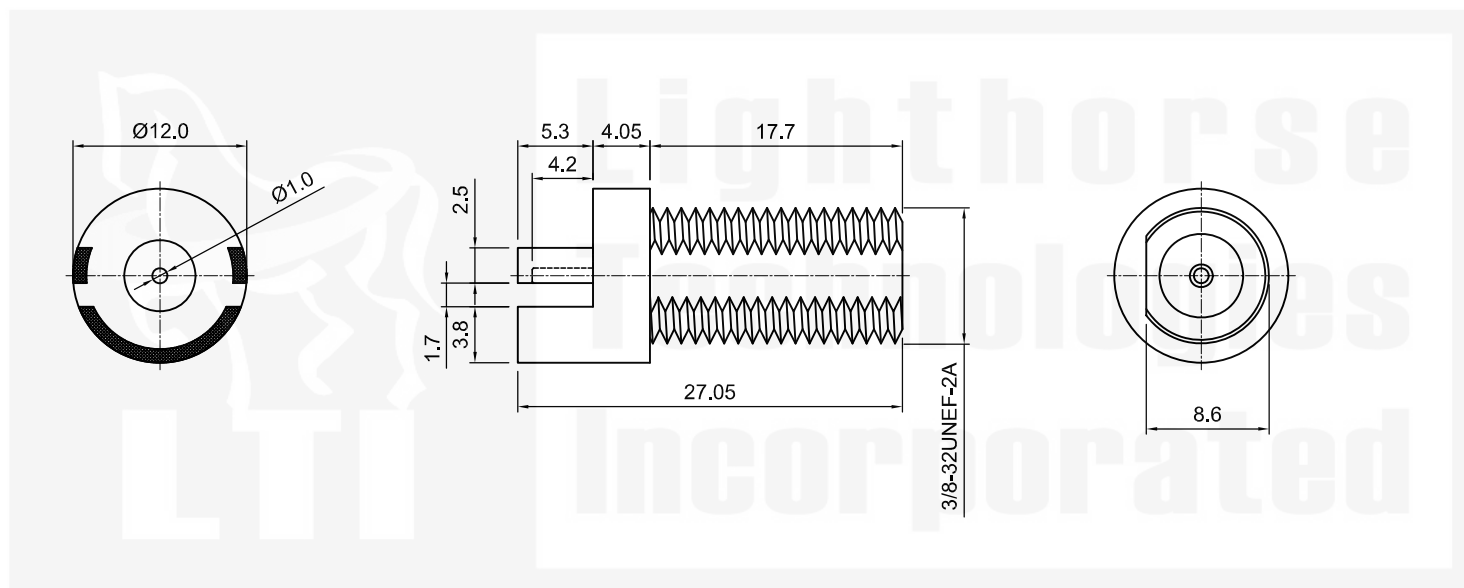

ITEM	MATERIAL	FINISH	 Lighthouse Technologies, Inc. 9511 Ridgehaven Court, Suite B San Diego, California 92123 Part Number: FSF55MGT-P10A-X7		
Connector Body	Brass, Note 1	Gold, Note 8	Description F end launch jack for high current applications. Gold plated brass body, Teflon and Polypropylene dielectric.		
Center Contact: Female	BeCu, Note 3	Gold, Note 11			
Insulation	Polypropylene (barrel); Teflon (disc), Note 5	None			
Ferrule	--	--			
Gasket	--	--			
Hex Nut	--	--			
Lock Washer	--	--			
			Scale	Drawing No.	File Name
				FSF55MGT-P10A-X7	FSF55MGT-P10A-X7