


ITEM	PART#	DESCRIPTION	QTY	UOM
A	901420008	CGrid Crp Conn Hsg DR FL Polz 8Ckt	1	PC
B	901190109	CGrid Term Fem Crp LFH SnA 2224AWG	8	PC
C	--	PAPER PRINTED PAPER WHITE	1	PC

FROM	TO	DESCRIPTION	COLOR
A1	--	1X22AWG DISC MPPE BK UL11028	BLACK
A2	--	1X22AWG DISC MPPE BK UL11028	BLACK
A3	--	1X22AWG DISC MPPE BK UL11028	BLACK
A4	--	1X22AWG DISC MPPE BK UL11028	BLACK
A5	--	1X22AWG DISC MPPE BK UL11028	BLACK
A6	--	1X22AWG DISC MPPE BK UL11028	BLACK
A7	--	1X22AWG DISC MPPE BK UL11028	BLACK
A8	--	1X22AWG DISC MPPE BK UL11028	BLACK

TABLE			
PART NUMBER	L1	L2 (REF)	TITLE
2196591082	150±8	15	CGRID III R-S 8ckt 150mm disc Sn
2196591083	300±10	15	CGRID III R-S 8ckt 300mm disc Sn
2196591084	600±10	15	CGRID III R-S 8ckt 600mm disc Sn

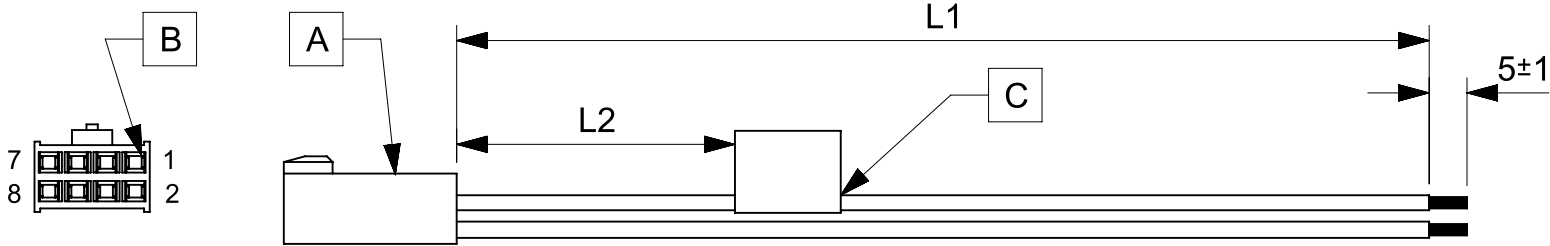

MOLEX P/N
MOLEX
BATCH WK/YR

- NOTES**
1. Connector view shown is from mating side.
 2. Label text must be 2mm max. in height with Arial font.
 3. Label must be wrapped in Flag type on a single cable.
 4. Free ends must be stripped, twisted & tinned. The length of tinning is 5±1mm. Tinning Dia must be 0.9 mm Max.

REFER DETAIL A

DETAIL A

REVISION			
DATE	REV	DESCRIPTION	CHANGER
2021/12/27	A	INITIAL RELEASE	SAIKIG

DOCUMENT STATUS	P1	RELEASE DATE	2022/01/13 11:15:21
-----------------	----	--------------	---------------------

FUNCTIONAL SYMBOLS $\frac{E}{A} = 0$ $\frac{E}{E} = 0$ $\frac{E}{P} = 0$	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		SCALE mm NTS		CURRENT REV DESC:								
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 690898 DRWN: SAIKIG 2021/12/27		2022/01/13					SEE TABLE			
	ANGULAR TOL ± °		4 PLACES ±		3 PLACES ±		2 PLACES ±		PRODUCT CUSTOMER DRAWING				
	DIVISIONAL SYMBOLS		3 PLACES ±		2 PLACES ±		1 PLACE ±					0 PLACES ±	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION		DRAWING		SERIES		MATERIAL NUMBER		CUSTOMER		SHEET NUMBER	
						A4-SIZE		219659		2196591082		PSD 000 A	
								SEE TABLE		GENERAL MARKET		1 OF 1	