

Data sheet

Order No.: 1717003

Type: LPCH 6/ 5+4-STL5-7,62

PCB hybrid connector, Push-in spring connection

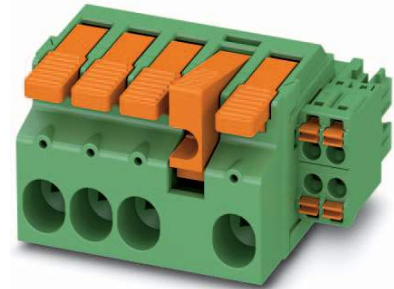


Figure shows a 4+4-pos. version with locking flange at position 4

1 Main features



- | | | | |
|---------------------------|---------------------------|------------------------|---------------------|
| • No. of pos. | 9 | • Nominal current | 41 A |
| • Conductor cross section | 6 mm ² | • Nominal voltage | 1000 V |
| • Color | green (6021) | • Connection direction | 0° |
| • Pitch | 7.62 mm | • Type of packaging | packed in cardboard |
| • Connection method | Push-in spring connection | | |

2 Your advantages

- ✓ Tool-free lever principle enables time-saving connection and release of conductors with/without ferrules
- ✓ Clear lever positions provide reliable feedback on opened or closed clamping spaces
- ✓ Defined contact force ensures that contact remains stable over the long term
- ✓ Time-saving push-in connection when lever is closed



Make sure you always use the latest documentation.

It can be downloaded at: phoenixcontact.net/product/1717003

3 Table of contents

1	Main features.....	1
2	Your advantages	1
3	Table of contents	2
4	3D model in PDF can be activated (Acrobat Reader only).....	3
5	General Technical Data	4
6	Material properties.....	5
7	Dimensions.....	6
8	Series drawing.....	7
9	Packaging information	8
10	Application.....	8
11	General tests	9
12	Mechanical tests.....	9
13	Electrical tests	11
14	Current carrying capacity/derating curves	12
15	Environmental and durability tests	13
16	Classification for connectors.....	13
17	Approvals	13
18	Commercial Data.....	14
19	Accessories.....	14
20	Combination tests.....	15

1717003 LPCH 6/ 5+4-STL5-7,62

4 3D model in PDF can be activated (Acrobat Reader only)



1717003 LPCH 6/ 5+4-STL5-7,62**5 General Technical Data****5.1 item properties**

Order No.	1717003
Type	LPCH 6/ 5+4-STL5-7,62
Plug-in system	POWER COMBICON 6 Hybrid
Product type	PCB hybrid connector
Type of contact	Female connector
Range of articles	LPCH 6/...-STL
Number of positions	9
Number of connections	9
Number of potentials	9
Type of locking	Snap-in locking Self-locking flange
Connection direction of the connector to the PCB	0 °

	Power	Signal
Pitch	7.62 mm	3.81 mm
Connection method	Push-in spring connection	Push-in spring connection
Number of levels	1	2
Number of positions	5	4
Number of connections	5	4
Number of potentials	5	4

5.2 Connection capacity

	Power	Signal
Conductor cross section, solid	0.75 mm ² ... 10 mm ²	0.2 mm ² ... 1.5 mm ²
Conductor cross section, flexible	0.75 mm ² ... 6 mm ²	0.2 mm ² ... 1.5 mm ²
Conductor cross section flexible, with ferrule without plastic sleeve	0.75 mm ² ... 6 mm ²	0.25 mm ² ... 1.5 mm ²
Conductor cross section flexible, with ferrule with plastic sleeve	0.75 mm ² ... 6 mm ²	0.25 mm ² ... 1 mm ²
Cylindrical gauge a x b / diameter	4.3 mm x 4.0 mm / 4.0 mm	2.4 mm x 1.5 mm / 1.5 mm
Stripping length	18 mm	10 mm

5.3 Connection capacity AWG

Connection data AWG	Power	Signal
Conductor cross section AWG	18 ... 8	24 ... 16

1717003 LPCH 6/ 5+4-STL5-7,62**6 Material properties****6.1 RoHs/WEEE compliant**

Note	WEEE/RoHS-compliant, free of whiskers according to IEC 60068-2-82/JEDEC JESD 201
------	--

6.2 Material of metal parts

	Power	Signal
Contact material	Cu alloy	Cu alloy
Terminal point surface	Tin (4 - 8 µm Sn)	Tin (4 - 8 µm Sn)
Surface contact area	Tin (4 - 8 µm Sn)	Tin (4 - 8 µm Sn)
Surface characteristics	Tin-plated	hot-dip tin-plated

6.3 Material Kunststoffteile

	Power	Signal
Insulating material	PA GF	PA
Insulating material group	I	I
CTI according to IEC 60112	600	600
Flammability rating according to UL 94	V0	V0
Color	green (6021)	green (6021)

6.4 Insulation material specifications for actuating element


	Power	Signal
Insulating material	PA GF	PBT
Insulating material group	I	I
CTI according to IEC 60112	600	600
Flammability rating according to UL 94	V0	V0
Color	orange (2003)	orange (2003)

1717003 LPCH 6/ 5+4-STL5-7,62**7 Dimensions****7.1 Dimensions for the product**

Length	48 mm
Width	55.54 mm
Total height	35.65 mm
Dimension a	38.1 mm

1717003 LPCH 6/ 5+4-STL5-7,62

8 Series drawing

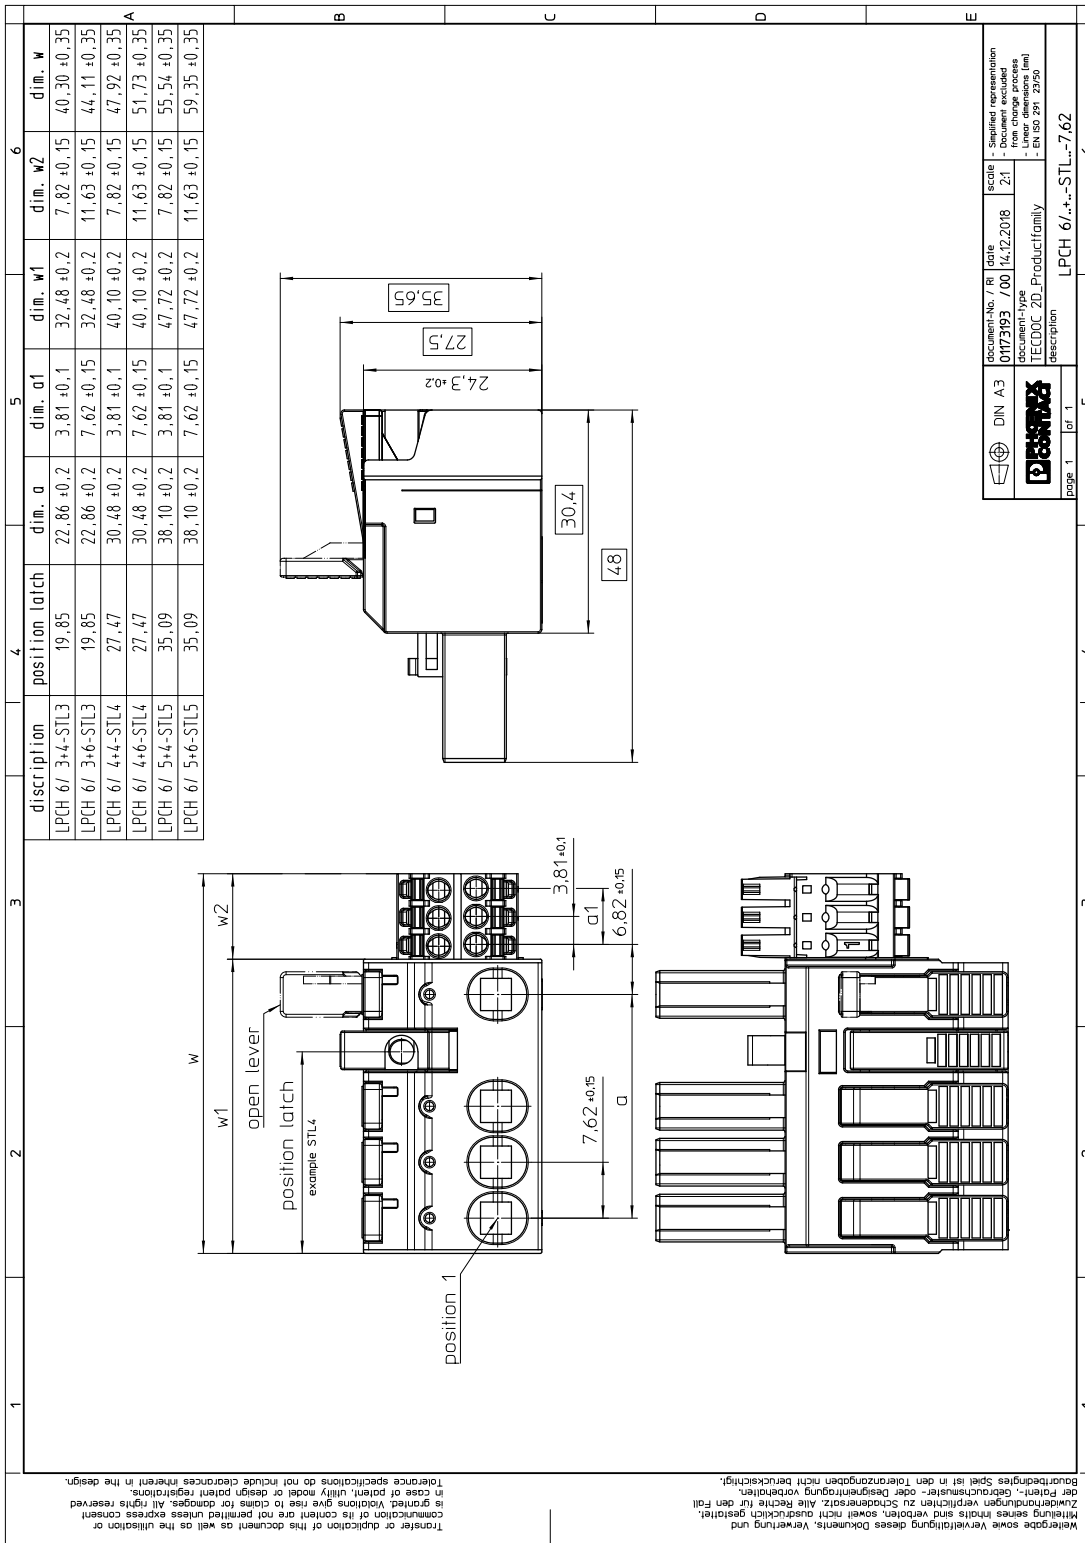

1717003 LPCH 6/ 5+4-STL5-7,62**9 Packaging information**

Type of packaging	packed in cardboard
Pieces per package	25

10 Application**10.1 Temperature limit values**

Ambient temperature (storage/transport)	-40 °C ... 70 °C
Ambient temperature (assembly)	-5 °C ... 100 °C
Ambient temperature (operation)	-40 °C (dependent on the derating curve)

1717003 LPCH 6/ 5+4-STL5-7,62**11 General tests****11.1 Specification**

Specification	IEC 61984
Specification	IEC 60999-1
Brief description	PCB hybrid connector

12 Mechanical tests**12.1 Check for damage to conductor or loosening**

Result	Test passed
Specification	IEC 60999-1:1999-11

12.2 Pull-out test

Specification	IEC 60999-1:1999-11
Result	Test passed
Conductor cross section/conductor type/tractive force actual value	0.75 mm ² / solid / > 30 N
Conductor cross section/conductor type/tractive force actual value	0.75 mm ² / flexible / > 30 N
Conductor cross section/conductor type/tractive force actual value	10 mm ² / solid / > 90 N
Conductor cross section/conductor type/tractive force actual value	6 mm ² / flexible / > 80 N

12.3 Repeated connection and disconnection

Specification	IEC 60999-1:1999-11
Result	Test passed

12.4 Conductor connection

Specification	IEC 60999-1:1999-11
Result	Test passed

12.5 Mechanical test group A

Specification	IEC 61984:2008-10
Visual examination	Test passed
Specification	IEC 60512-1-1:2002-02
Dimensional test	Test passed
Specification	IEC 60512-1-2:2002-02
Resistance of marking	Test passed
Specification	IEC 60068-2-70:1995-12
Insertion and withdrawal force	Test passed
Specification	IEC 60512-13-2:2006-02
No. of cycles	25
Insertion strength per pos. approx.	7 N
Withdraw strength per pos. approx.	4 N

1717003 LPCH 6/ 5+4-STL5-7,62

Polarization and coding		Test passed
Specification	IEC 60512-13-5:2006-02	
Test force	20 N	
Contact retention in insert		Test passed
Specification	IEC 60512-15-1:2008-05	
Test force per pos.	20 N	

1717003 LPCH 6/ 5+4-STL5-7,62**13 Electrical tests****13.1 Electrical data**

Rated current / conductor cross section	41 A / 6 mm ²
Rated insulation voltage (III/2)	1000 V
Rated surge voltage (III/2)	8 kV
Contact resistance	0.42 mΩ
Degree of pollution	2

13.2 Air and creepage distances

Component	PCB hybrid connector		
Specification	IEC 60664-1:2007-04		
Mains type	unearthed mains		
Insulating material group	I		
Comparative tracking index (IEC 60112:2003-01)	CTI 600		
Rated insulation voltage	800 V	1000 V	1000 V
Rated surge voltage	8 kV	8 kV	6 kV
Degree of pollution	3	2	2
Overvoltage category	III	III	II
Minimum clearance case A (inhomogeneous field)	8 mm	8 mm	5.5 mm
Minimum value of the creepage path requirement in acc. with table	10 mm	5 mm	5 mm

13.3 Electrical function

Specification	IEC 60999-1:1999-11
Result	Test passed
Voltage drop	Voltage drop (U) after the load ≤ 15 mV
Conductor cross section, flexible	0.75 mm ² ... 6 mm ²
Conductor cross section, solid	0.75 mm ² ... 10 mm ²

13.4 Temperature cycles


Specification	IEC 60999-1:1999-11
Result	Test passed
Voltage drop	Voltage drop (U) after the load ≤ 22.5 mV or 1.5 x U _{after 24 h} The small value is to be used.
Test current (minimum cross section)	9 A DC
Test current (maximum cross section)	41 A DC
Temperature cycles	192
Conductor cross section, flexible	0.75 mm ² ... 6 mm ²
Conductor cross section, solid	0.75 mm ² ... 10 mm ²

1717003 LPCH 6/ 5+4-STL5-7,62

14 Current carrying capacity/derating curves

Specification	IEC 61984:2008-10
Note	Representation based on IEC 60512-5-2:2002-02
Reduction factor	0.8
Number of positions	See diagram
Conductor cross section	6 mm ²

Type: LPCH 6/...+...-STL...-7,62 with PCH 6/...+...-GL...-7,62

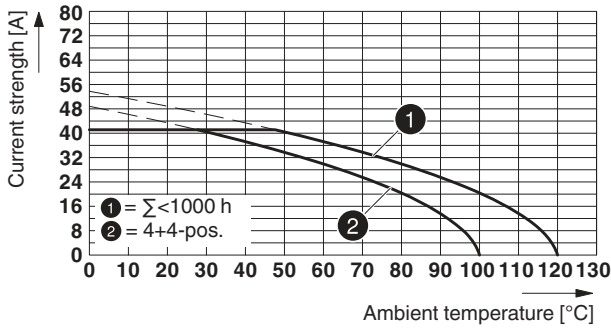

Insulation resistance	
Specification	IEC 60512-3-1:2002-02
Result	Test passed
Insulation resistance, neighboring positions	> 5 MΩ

1717003 LPCH 6/ 5+4-STL5-7,62**15 Environmental and durability tests****15.1 Vibration test**

Specification	IEC 60068-2-6:2007-12
Result	Test passed
Frequency	10 - 150 - 10 Hz
Sweep speed	1 octave/min
Amplitude	0.35 mm (10 - 60.1 Hz)
Acceleration	5 g (60.1 - 150 Hz)
Test duration per axis	2.5 h
Test directions	X-, Y- and Z-axis
Note	The connected conductor loops were guided to the test sample at a distance of approx. 10 cm.

Shock	
Specification	IEC 60068-2-27:2008-02
Result	Test passed
Pulse shape	Semi-sinusoidal
Peak acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)


16 Classification for connectors

Specification	IEC 61984:2008-10
Main features	Connectors without switching capacity (COC)
Construction form	Fixed connectors
Strain relief elements	without strain relief
Connection method	Can be reconnected
Protection against electric shock	not encapsulated - back of hand safety when plugged in
Protective conductor	without PE
Lock	no
Connection method	Screwless terminal points

16.1 Insulation resistance

Specification	IEC 60512-3-1:2002-02
Result	Test passed
Insulation resistance, neighboring positions	> 5 MΩ

17 Approvals

cULus Recognized 			
Use group	B1	F	F1
mm ² /AWG/kcmil	24-16	18-8	24-16
Voltage	150 V	600 V	160 V
Current	6 A	35 A	6 A

1717003 LPCH 6/ 5+4-STL5-7,62**18 Commercial Data**

Order No.	1717003
Type	LPCH 6/ 5+4-STL5-7,62
Pieces per package	25
Net weight	22.22 g
GTIN	4055626532585
	Information that applies locally, see link on page 1
Country of origin	Information that applies locally, see link on page 1

19 Accessories

Description	Order No.	Type
Coding profile, for plugging into the coding ribs of the plug at a later date, insulating material, color: Red	1701967	CP-PC RD
	3200603	Al 6 -18 YE
Crimping pliers, for uninsulated and insulated ferrules, DIN 46228 Part 1 and 4, from 0.14 mm ² ... 6 mm ² , also for TWIN ferrules up to 2 x 4 mm ² , automatic cross section adjustment, lateral insertion, equipped with fall protection	1213144	CRIMPFOX CENTRUS 6S
Stripping tool, for cables and conductors from 0.02 - 10 mm ² , self-adjusting, stripping length of up to 18 mm, cutting capacity of up to 10 mm ² stranded/1.5 mm ² solid, replaceable stripping blade	1212150	WIREFOX 10

1717003 LPCH 6/ 5+4-STL5-7,62

20 Combination tests

**LPCH 6/..-STL**

IEC 61984

Mechanical tests (A)

Insertion/withdrawal force per position

Polarization when inserted
Requirement >20 NContact holder in insert
Requirements >20 N**Durability tests (B)**Contact resistance R_1

Insertion/withdrawal cycles

Contact resistance R_2 Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$ Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$ **Thermal tests (C)**

Tested number of positions

Tested conductor cross section

Test current

Upper limiting temperature
Requirements < 100°C**Climatic tests (D)**

Test sequence 1: low temperature storage

Test sequence 2: heat storage

Test sequence 3: noxious gas storage
(ISO 6988)Rated impulse voltage at sea level
Voltage waveform $\geq (1.2/50 \mu s)$ Power-frequency withstand voltage
Voltage waveform $\geq (50/60 \text{ Hz})$ **Environmental and endurance tests (E)**

Specification

Degree of protection

PCH 6/..-GL4

IEC 61984

approx. 7 N / 4 N

Test passed

Test passed

0.42 m Ω

25

0.46 m Ω

7.3 kV

3.31 kV

4

6 mm²

41 A

Test passed

-40 °C/2 h

100 °C/168 h

0.2 dm³ SO₂ on 300 dm³/
40 °C/1 cycle

7.3 kV

3.31 kV

IEC 61984:2008-10

Back of hand safety with
IP10 access probe