

\*\*\* spare part \*\*\* SIMATIC IFP1500 Flat Panel 15" display (16:10), without touch, only display, standard up to 5 m, 1280x 800 pixels, for 24 V DC, DisplayPort/DVI interface incl. DVI cable 1.8 m

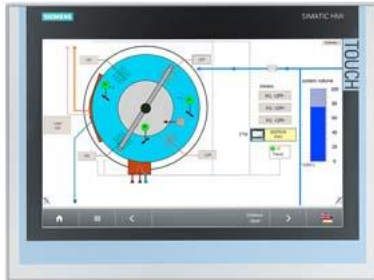


Figure similar

General information	
Product type designation	IFP1500
Short designation	Flat Panel 15" display
Display	
Design of display	TFT widescreen display, LED backlighting
Screen diagonal	15.4 in; 15"
Screen diagonal [cm]	40 cm
Display width	331.2 mm
Display height	207 mm
On Screen Display (OSD) configuration	No; Adjustable by means of software
Number of colors	16 777 216; 24 bit
Viewing angle	170° x 170°
Resolution (pixels)	
• Image resolution	1 280 x 800
• Horizontal image resolution	1 280 pixel
• Vertical image resolution	800 pixel
• Pixel size, horizontal	0.259 mm
• Pixel size, vertical	0.259 mm
General features	
• Brightness/contrast	400 cd/m <sup>2</sup> / 1 000:1
• non-reflective and tempered mineral glass screen	Yes
• Detachable from computer unit	5 m
• Luminance	400 cd/m <sup>2</sup>
Backlighting	
• Type of backlighting	LED
• MTBF backlighting (at 25 °C)	50 000 h; At 25°C
• Backlight dimmable	Yes; 0-100 %
Control elements	
Control elements	none
Input device	
• Integrated mouse cursor control	No
Touch operation	
• Design as touch screen	No
Installation type/mounting	
Design	Built-in unit
Front mounting	Yes
Built-in unit	Yes; Portrait mode possible
maximum permitted forward tilt angle from vertical	35°

maximum permitted backward tilt angle from vertical	35°
<b>Supply voltage</b>	
Type of supply voltage	DC
Rated value (DC)	24 V
permissible range, lower limit (DC)	19.2 V
permissible range, upper limit (DC)	28.8 V
<b>Power loss</b>	
Power loss, typ.	40 W
Power loss, max.	65 W
<b>Interfaces</b>	
USB on the rear	Yes; 2x onboard
<b>Video interfaces</b>	
• DVI-D	Yes
• DisplayPort	Yes; DisplayPort V1.1
<b>Touch interfaces</b>	
• USB	No
<b>Degree and class of protection</b>	
IP (at the front)	IP65
IP (rear)	IP20
NEMA (front)	
• Enclosure Type 4 at the front	Yes
<b>Standards, approvals, certificates</b>	
CE mark	Yes
cULus	Yes; Corresponds to UL 508
RCM (formerly C-TICK)	Yes
KC approval	Yes
<b>Use in hazardous areas</b>	
• FM Class I Division 2	Yes
<b>Ambient conditions</b>	
<b>Ambient temperature during operation</b>	
• min.	0 °C
• max.	50 °C; Vertical installation (horizontal)
<b>Ambient temperature during storage/transportation</b>	
• min.	-20 °C
• max.	60 °C
<b>Relative humidity</b>	
• Operation, max.	95 %; no condensation
<b>Vibrations</b>	
• Vibration load in operation	10 m/s <sup>2</sup>
• Vibration load during transport/storage	10 m/s <sup>2</sup>
<b>Shock testing</b>	
• Shock load during operation	150 m/s <sup>2</sup>
• shock acceleration during storage/transport	150 m/s <sup>2</sup>
<b>Mechanics/material</b>	
Enclosure material (front)	
• Aluminum	Yes
<b>Dimensions</b>	
Width of the housing front	415 mm
Height of housing front	310 mm
Mounting cutout, width	396 mm; Tolerance: +1 mm
Mounting cutout, height	291 mm; Tolerance: +1 mm
Overall depth	62.5 mm
<b>Weights</b>	
Weight (without packaging)	3.9 kg
Weight (with packaging)	5 kg
<b>last modified:</b>	12/16/2020 