
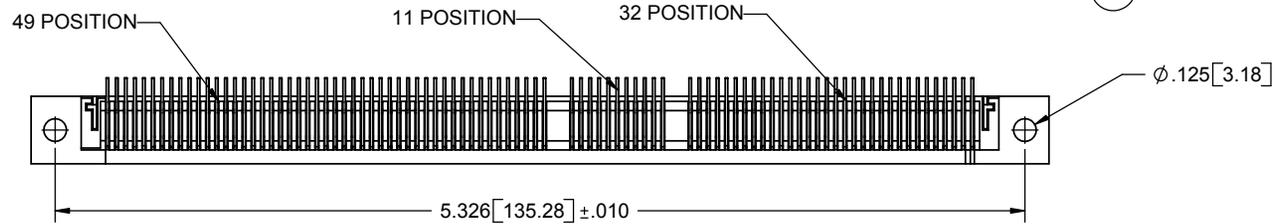
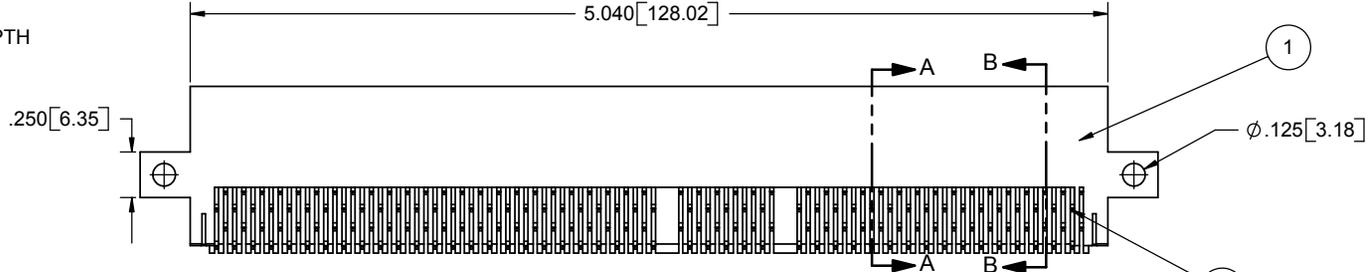
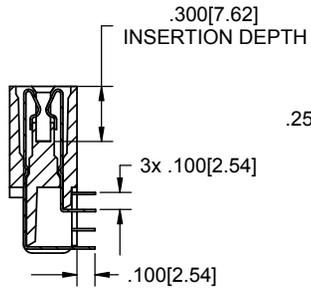


ITEM NO.	QTY.	DESCRIPTION	DRAWING # REF
1	1	B92CD-A351	10127
2	184	EZB-DHM	256

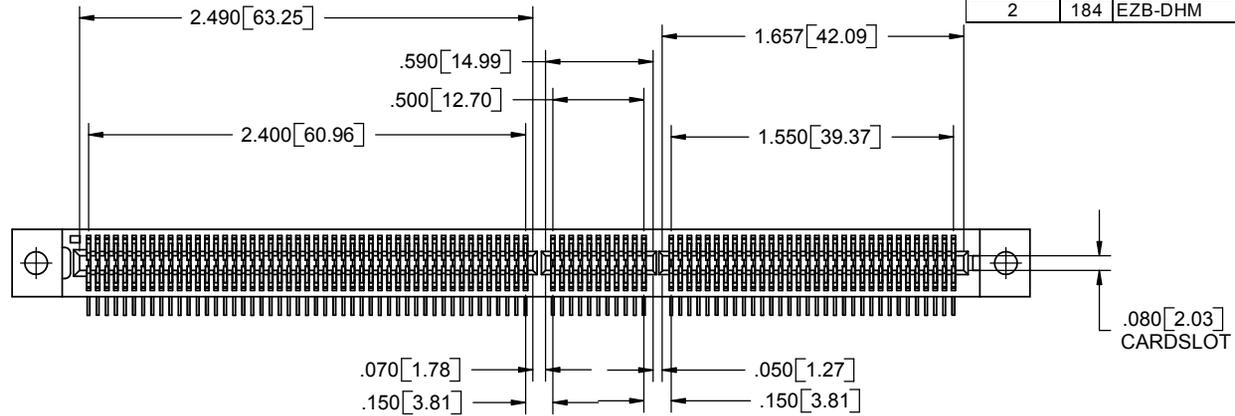

**NOTES:**

- THIS SPECIFICATION COVERS THE REQUIREMENT FOR A DUAL 92/184 ROW EDGECARD CONNECTOR
- INSULATOR MATERIAL: POLYPHENYLENE SULFIDE. (BLACK)
- CONTACT MATERIAL: PHOSPHOR BRONZE.
- PLATING: .00001" GOLD ON CONTACT SURFACE  
.00001" TIN/LEAD ON TERMINAL  
.00005" NICKEL UNDERPLATE
- TEMPERATURE: -65°C TO 125°C
- UL FLAMMABILITY RATING: 94V-0
- VOLTAGE RATING: 125 VDC MINIMUM AT SEA LEVEL.
- CURRENT RATING: 1 AMP
- VOLTAGE DROP: 30 MILLI VOLT AT RATED CURRENT
- INSULATION RESISTANCE: 1000 MEGA OHM
- CONNECTOR IDENTIFICATION: THE PART SHALL BE MARKED WITH A PART NUMBER AND DATE CODE.
- BOARD THICKNESS ACCOMMODATED: .062 [1.57]
- BOARD WITHDRAWAL FORCE: 6 OUNCE AVERAGE PER CONTACT PAIR USING .062 [1.57] PCB
- BOARD WITHDRAWAL FORCE: 1 OUNCE MINIMUM PER CONTACT PAIR USING .062 [1.57] PCB
- TOLERANCE: ±.010" UNLESS OTHERWISE NOTED.
- MODIFICATION: MOLDED KEY BETWEEN POSITIONS 49 AND 52, 62 AND 65

COMPUTER GENERATED DOCUMENT DO NOT CHANGE MANUALLY

PROPRIETARY AND CONFIDENTIAL  
THIS DRAWING AND DESIGN IS THE PROPERTY OF SULLINS ELECTRONICS. IT MAY NOT BE USED FOR ANY PURPOSE OTHER THAN BY THE OWNER. SULLINS ELECTRONICS DOES NOT AUTHORIZE THE REPRODUCTION OR CONVEYANCE OF ANY INFORMATION CONTAINED HEREIN.

REV.	ECO NO.	DESCRIPTION	DATE	BY	APP'VD
A	120	ORIGINAL RELEASE	01/09/04	AN	AJT
		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: 1/32 ANGULAR: ± 1° TWO PLACE DECIMAL: ± .02 THREE PLACE DECIMAL: ± .005 FOUR PLACE DECIMAL: ± .0005 INTERPRET GEOMETRIC TOLERANCING PER: MATERIAL: NOTED FINISH: N/A			
		DRAWN: ARIA CHECKED: AJT			
		COMMENTS:		PART NO./DESCRIPTION:	
				RZB92DHAS-S250	
		SIZE: C	DWG. NO.: 10126	REV: A	
		APPLICATION: DO NOT SCALE DRAWING	SCALE: 2:1	SHEET 1 OF 1	