



WWW.BARRYIND.COM

RP0502ZZ-XXXXWN-YY*

BeO or Alumina

WRAP AROUND CHIP RESISTOR




Features:

- ◆ BeO or Alumina material
- ◆ Wrap Around
- ◆ Available in .5 ohm to 1 Mohm


General Description:

The RP0502ZZ-XXXXWN-YY* series is a wrap around style chip resistor. It offers a small package design available in BeO or Alumina material.

* See below for ordering options.

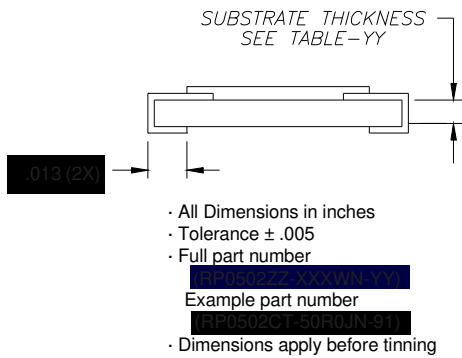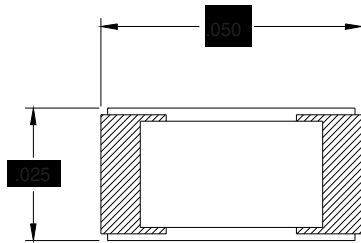

DERATING CURVE:

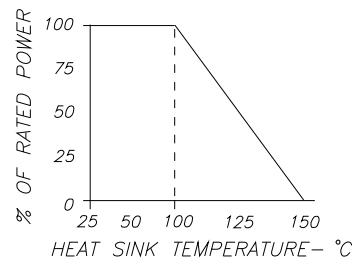

***R P 0502 ZZ - XXXX W N - YY**

Resistor **Wrap Around** **Size** **Ohms** **(N)ormal Inspection** **Thickness and Material**

0.5	R500			
1	1R00			
10	10R0			
50	50R0			
100	1000			
150	1500			
1K	1001			
10K	1002			
100K	1003			
470K	4703			
1M	1004			

Termination Material and Finish

Tolerance

Thickness and Material

-91 - .015" Alumina - .15 Watts
-96 - .015" BeO - .35 Watts

F - 1%
G - 2%
J - 5%
K - 10%
L - 20%
X = Special

BA - available on Alumina:
Palladium Silver, Epoxy Mount, **RoHS Compliant**

CB - available on Alumina & BeO:
Tin Lead over Nickel over Silver, Solder Mount, NOT RoHS

CT - available on Alumina & BeO:
Matte Tin over Nickel over Silver, Solder Mount, **RoHS Compliant**

GA - available on Alumina:
Gold, Epoxy Mount, Wire Bond, **RoHS Compliant**

JA - available on BeO:
Gold over Platinum Gold, Epoxy Mount, Wire Bond, **RoHS Compliant**

Barry Industries reserves the right to change part number and or process without notification

Barry Industries, Inc., 60 Walton St., Attleboro, MA 02703 T: 508-226-3350 F: 508-226-3317 E-mail: sales@barryind.com

Barry Industries maintains an ISO 9001 Certified Quality Management System

Origination Date	Revision Date	Rev.
11/05/12	11/05/12	-