

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

Please be informed that the data shown in this PDF document is generated from our online catalog. Please find the complete data in the user documentation. Our general terms of use for downloads are valid.



Potential distributors, with option to supply up to 6 mm<sup>2</sup>, nom. voltage: 250 V, nominal current: 17.5 A, connection method: Push-in connection, Rated cross section: 1.5 mm<sup>2</sup>, cross section: 0.14 mm<sup>2</sup> - 2.5 mm<sup>2</sup>, Feed-in stage, Rated cross section: 4 mm<sup>2</sup>, cross section: 0.2 mm<sup>2</sup> - 6 mm<sup>2</sup>, mounting: NS 35/7,5, NS 35/15, color: gray, color of connection elements: gray

## Your advantages

- Bridgeable potential distributor with option to supply up to 6 mm<sup>2</sup>
- High contact quality thanks to push-in technology as a replacement for Wire-Wrap®, TERMI-POINT®, etc.
- Tool-free wiring in a confined space thanks to compact size

## Commercial data

Item number	3270138
Packing unit	1 pc
Minimum order quantity	10 pc
Sales key	BE62
Product key	BE6211
Catalog page	Page 48 (C-1-2019)
GTIN	4055626355238
Weight per piece (including packing)	20.546 g
Weight per piece (excluding packing)	20.31 g
Customs tariff number	85369010
Country of origin	PL

## Technical data

### Product properties

Product type	Potential distributor
Number of positions	2
Number of connections	13
Number of rows	4
Potentials	1

### Insulation characteristics

Overvoltage category	III
----------------------	-----

### Electrical properties

Rated surge voltage	4 kV
Maximum power dissipation for nominal condition	0.56 W

### Connection data

Service Entrance	yes
Number of connections per level	4
Nominal cross section	1.5 mm <sup>2</sup>

### Level 1+2+3 above 1

Stripping length	8 mm ... 10 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.14 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Cross section AWG	26 ... 14 (converted acc. to IEC)
Conductor cross section flexible	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	26 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.14 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Nominal current	17.5 A (with 1.5 mm <sup>2</sup> conductor cross section)
Maximum load current	24 A (per chamber with 2.5 mm <sup>2</sup> conductor cross section)
Maximum total current	37 A (per potential distributor)
Nominal voltage	250 V
Nominal cross section	1.5 mm <sup>2</sup>

### Feed-in stage

Note	Only the "CRIMPFOX 6" crimping pliers may be used for crimping with 6 mm <sup>2</sup> stranded and ferrule.
Stripping length	10 mm ... 12 mm
Connection in acc. with standard	IEC 60947-7-1
Conductor cross section rigid	0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Cross section AWG	24 ... 10 (converted acc. to IEC)
Conductor cross section flexible	0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section, flexible [AWG]	24 ... 10 (converted acc. to IEC)

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

Conductor cross-section flexible (ferrule without plastic sleeve)	0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.2 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Nominal current	32 A (Supply, for 4 mm <sup>2</sup> conductor cross section)
Maximum load current	37 A (Service Entrance)
Nominal voltage	250 V
Nominal cross section	4 mm <sup>2</sup>

## Level 1+2+3 above 1 Connection cross sections directly pluggable

Conductor cross section rigid	0.34 mm <sup>2</sup> ... 2.5 mm <sup>2</sup>
Conductor cross section, rigid [AWG]	20 ... 14 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.34 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.34 mm <sup>2</sup> ... 1.5 mm <sup>2</sup>

## Feed-in stage Connection cross sections directly pluggable

Conductor cross section rigid	0.34 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Conductor cross section, rigid [AWG]	24 ... 10 (converted acc. to IEC)
Conductor cross-section flexible (ferrule without plastic sleeve)	0.34 mm <sup>2</sup> ... 6 mm <sup>2</sup>
Flexible conductor cross section (ferrule with plastic sleeve)	0.34 mm <sup>2</sup> ... 6 mm <sup>2</sup>

## Dimensions

Width	8.3 mm
Height	64 mm
Depth on NS 35/7,5	55.5 mm
Depth on NS 35/15	63 mm

## Material specifications

Color	gray
Color of connection elements	gray
Flammability rating according to UL 94	V0
Insulating material group	I
Insulating material	PA
Static insulating material application in cold	-60 °C
Temperature index of insulation material (DIN EN 60216-1 (VDE 0304-21))	125 °C
Relative insulation material temperature index (Elec., UL 746 B)	130 °C
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3
Calorimetric heat release NFPA 130 (ASTM E 1354)	27,5 MJ/kg
Surface flammability NFPA 130 (ASTM E 162)	passed
Specific optical density of smoke NFPA 130 (ASTM E 662)	passed
Smoke gas toxicity NFPA 130 (SMP 800C)	passed

## Electrical tests

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## Surge voltage test

Test voltage setpoint	4.8 kV
Result	Test passed

## Temperature-rise test

Requirement temperature-rise test	Increase in temperature $\leq 45$ K
Result	Test passed
Short-time withstand current 1.5 mm <sup>2</sup>	0.18 kA
Short-time withstand current 2.5 mm <sup>2</sup>	0.3 kA
Short-time withstand current 4 mm <sup>2</sup>	0.48 kA
Short-time withstand current 6 mm <sup>2</sup>	0.72 kA
Result	Test passed

## Power-frequency withstand voltage

Test voltage setpoint	1.5 kV
Result	Test passed

## Mechanical properties

### Mechanical data

Open side panel	Yes
-----------------	-----

## Mechanical tests

### Mechanical strength

Result	Test passed
--------	-------------

### Attachment on the carrier

DIN rail/fixing support	NS 35
Test force setpoint	1 N
Result	Test passed

### Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.14 mm <sup>2</sup> / 0.2 kg
	1.5 mm <sup>2</sup> / 0.4 kg
	2.5 mm <sup>2</sup> / 0.7 kg
Result	Test passed

### Test for conductor damage and slackening

Rotation speed	10 rpm
Revolutions	135
Conductor cross section/weight	0.2 mm <sup>2</sup> / 0.2 kg
	4 mm <sup>2</sup> / 0.9 kg
	6 mm <sup>2</sup> / 1.4 kg
Result	Test passed

## Environmental and real-life conditions

### Aging

Temperature cycles	192
Result	Test passed

### Needle-flame test

Time of exposure	30 s
Result	Test passed

### Oscillation/broadband noise

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Spectrum	Service life test category 2, bogie-mounted
Frequency	$f_1 = 5 \text{ Hz}$ to $f_2 = 250 \text{ Hz}$
ASD level	6.12 (m/s <sup>2</sup> ) <sup>2</sup> /Hz
Acceleration	3.12g
Test duration per axis	5 h
Test directions	X-, Y- and Z-axis
Result	Test passed

### Shocks

Specification	DIN EN 50155 (VDE 0115-200):2008-03
Pulse shape	Half-sine
Acceleration	30g
Shock duration	18 ms
Number of shocks per direction	3
Test directions	X-, Y- and Z-axis (pos. and neg.)
Result	Test passed

### Ambient conditions

Ambient temperature (operation)	-60 °C ... 105 °C (max. short-term operating temperature RTI Elec.)
Ambient temperature (storage/transport)	-25 °C ... 60 °C (for a short time, not exceeding 24 h, -60 °C to +70 °C)
Ambient temperature (assembly)	-5 °C ... 70 °C
Ambient temperature (actuation)	-5 °C ... 70 °C
Permissible humidity (storage/transport)	30 % ... 70 %

## Standards and regulations

Connection in acc. with standard	IEC 60947-7-1
	IEC 60947-7-1

## Mounting

Mounting type	NS 35/7,5
	NS 35/15

# PTRVB 4-FI /GY - Potential distributors




3270138

<https://www.phoenixcontact.com/us/products/3270138>

## Drawings

Circuit diagram

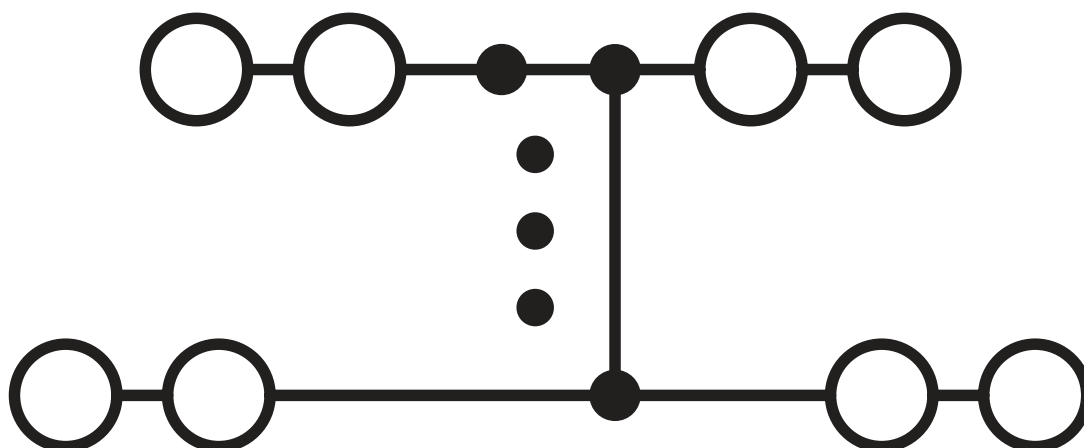

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## Approvals

To download certificates, visit the product detail page: <https://www.phoenixcontact.com/us/products/3270138>

**DNV**

Approval ID: TAE000016Y



**CSA**

Approval ID: 13631



**IECEE CB Scheme**

Approval ID: NL-58817

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
	250 V	17.5 A	-	-



**EAC**

Approval ID: RU C-DE.BL08.B.00682



**cULus Recognized**

Approval ID: E60425



**KEMA-KEUR**

Approval ID: 71-102890

	Nominal voltage $U_N$	Nominal current $I_N$	Cross section AWG	Cross section $\text{mm}^2$
Only flexible conductors	250 V	17.5 A	-	0.14 - 1.5
Only rigid conductors	250 V	17.5 A	-	0.14 - 2.5



**EAC**

Approval ID: B.01687



**cULus Recognized**

Approval ID: E60425

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## Classifications

### ECLASS

ECLASS-11.0	27141120
ECLASS-13.0	27250119

### ETIM

ETIM 8.0	EC000897
----------	----------

### UNSPSC

UNSPSC 21.0	39121400
-------------	----------



# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## Environmental product compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e No hazardous substances above threshold values
------------	---

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## Accessories

 Note: Applying some accessories below might limit this product.


### FBST 500-PLC RD - Continuous plug-in bridge

2966786

<https://www.phoenixcontact.com/us/products/2966786>



Continuous plug-in bridge, length: 500 mm, color: red

 Max. current carrying capacity: 32 A

---

### FBST 500-PLC GY - Continuous plug-in bridge

2966838

<https://www.phoenixcontact.com/us/products/2966838>



Continuous plug-in bridge, length: 500 mm, color: gray

 Max. current carrying capacity: 32 A

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## FBST 500-PLC BN - Continuous plug-in bridge

2967976

<https://www.phoenixcontact.com/us/products/2967976>



Continuous plug-in bridge, length: 500 mm, color: brown

 Max. current carrying capacity: 32 A

---


## FBST 500-PLC BU - Continuous plug-in bridge

2966692

<https://www.phoenixcontact.com/us/products/2966692>



Continuous plug-in bridge, length: 500 mm, color: blue

 Max. current carrying capacity: 32 A

---

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## DP-PTRV 4 - Spacer plate

3270163

<https://www.phoenixcontact.com/us/products/3270163>



Spacer plate, length: 63.6 mm, width: 8.3 mm, height: 63.6 mm, color: gray

---

## CDC-PTRV - Retaining bracket

3270167

<https://www.phoenixcontact.com/us/products/3270167>



Retaining bracket, via four PTRV single modules, pitch: 8.3 mm, width: 35.6 mm, height: 71.5 mm, color: gray

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## PT-IL - Mounting material

3208090

<https://www.phoenixcontact.com/us/products/3208090>

Operating decal for the push-in Technology



---

## ST-BW 0 - Actuation tool

1200135

<https://www.phoenixcontact.com/us/products/1200135>

Actuation tool, for all 1.5 mm<sup>2</sup> spring cages from PT 1,5/S and FT 1,5/S



# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>



## RPS - Reducing plug

0201647

<https://www.phoenixcontact.com/us/products/0201647>



Reducing plug, number of positions: 1, color: gray

---

## FBST 50-PLC RD - Plug-in bridge

1081050

<https://www.phoenixcontact.com/us/products/1081050>



Plug-in bridge, length: 50 mm, color: red

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## FBST 50-PLC BU - Plug-in bridge

1081051

<https://www.phoenixcontact.com/us/products/1081051>



Plug-in bridge, length: 50 mm, color: blue

---

## FBST 50-PLC GY - Plug-in bridge

1081053

<https://www.phoenixcontact.com/us/products/1081053>



Plug-in bridge, length: 50 mm, color: gray

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## ZB 8,3:UNBEDRUCKT - Zack marker strip

0803444

<https://www.phoenixcontact.com/us/products/0803444>



Zack marker strip, Strip, white, unlabeled, can be labeled with: PLOTMARK, CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.3 mm, lettering field size: 10.5 x 8.3 mm

---

## ZB 8,3,LGS:FORTL.ZAHLEN - Zack marker strip

0803480

<https://www.phoenixcontact.com/us/products/0803480>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.3 mm, lettering field size: 10.5 x 8.3 mm



# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## ZB 8,3,QR:FORTL.ZAHLEN - Zack marker strip

0803479

<https://www.phoenixcontact.com/us/products/0803479>



Zack marker strip, Strip, white, labeled, can be labeled with: CMS-P1-PLOTTER, mounting type: snapped, for terminal block width: 8.3 mm, lettering field size: 10.5 x 8.3 mm

---

## ZB 8,3 CUS - Zack marker strip

8191573

<https://www.phoenixcontact.com/us/products/8191573>



Zack marker strip, Strip, white, labeled according to customer specifications, mounting type: snap into tall marker groove, for terminal block width: 8.3 mm, lettering field size: 10.5 x 8.3 mm

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## TM-PTRV 4,QR:1-4 - Marker for terminal blocks

0803464

<https://www.phoenixcontact.com/us/products/0803464>



Marker for terminal blocks, white, labeled, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 2.4 x 9.2 mm

---

## TM-PTRV 4,QR:4-1 - Marker for terminal blocks

0803465

<https://www.phoenixcontact.com/us/products/0803465>



Marker for terminal blocks, white, labeled, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 2.4 x 9.2 mm

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## TM-PTRV 4,QR:A-D - Marker for terminal blocks

0803466

<https://www.phoenixcontact.com/us/products/0803466>



Marker for terminal blocks, white, labeled, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 2.4 x 9.2 mm

---

## TM-PTRV 4,QR:D-A - Marker for terminal blocks

0803467

<https://www.phoenixcontact.com/us/products/0803467>



Marker for terminal blocks, white, labeled, mounting type: snapped, for terminal block width: 4 mm, lettering field size: 2.4 x 9.2 mm

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## D-PTRV 4 WH - End cover

3270151

<https://www.phoenixcontact.com/us/products/3270151>

End cover, length: 63.6 mm, width: 3.8 mm, height: 63.6 mm, color: white



---

## D-PTRV 4 WH 1-4 - End cover

3270152

<https://www.phoenixcontact.com/us/products/3270152>

End cover, length: 63.6 mm, width: 2.2 mm, height: 63.6 mm, color: white



# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## D-PTRV 4 WH 1-4 LGS - End cover

3270234

<https://www.phoenixcontact.com/us/products/3270234>



End cover, length: 63.6 mm, width: 2.2 mm, height: 63.6 mm, color: white

---

## D-PTRV 4 WH 4-1 - End cover

3270236

<https://www.phoenixcontact.com/us/products/3270236>



End cover, length: 63.6 mm, width: 2.2 mm, height: 63.6 mm, color: white

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## D-PTRV 4 WH 4-1 LGS - End cover

3270238

<https://www.phoenixcontact.com/us/products/3270238>



End cover, length: 63.6 mm, width: 2.2 mm, height: 63.6 mm, color: white

---

## D-PTRV 4 WH A-D - End cover

3270153

<https://www.phoenixcontact.com/us/products/3270153>



End cover, length: 63.6 mm, width: 2.2 mm, height: 63.6 mm, color: white

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## D-PTRV 4 WH A-D LGS - End cover

3270235

<https://www.phoenixcontact.com/us/products/3270235>



End cover, length: 63.6 mm, width: 2.2 mm, height: 63.6 mm, color: white

---

## D-PTRV 4 WH D-A - End cover

3270237

<https://www.phoenixcontact.com/us/products/3270237>



End cover, length: 63.6 mm, width: 2.2 mm, height: 63.6 mm, color: white

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## D-PTRV 4 WH D-A LGS - End cover

3270239

<https://www.phoenixcontact.com/us/products/3270239>



End cover, length: 63.6 mm, width: 2.2 mm, height: 63.6 mm, color: white

---

## NS 35/ 7,5 PERF 2000MM - DIN rail perforated

0801733

<https://www.phoenixcontact.com/us/products/0801733>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)



## PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

### NS 35/ 7,5 UNPERF 2000MM - DIN rail, unperforated

0801681

<https://www.phoenixcontact.com/us/products/0801681>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, passivated with a thick layer, Standard profile, color: silver, Pack of 25 (50 m)

---

### NS 35/ 7,5 WH PERF 2000MM - DIN rail perforated

1204119

<https://www.phoenixcontact.com/us/products/1204119>



DIN rail perforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 25 (50 m)

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## NS 35/ 7,5 WH UNPERF 2000MM-VPE 10 - DIN rail, unperforated

1204122

<https://www.phoenixcontact.com/us/products/1204122>



DIN rail, unperforated, acc. to EN 60715, material: Steel, Galvanized, white passivated, Standard profile, color: silver, Pack of 10 (20 m)

---

## NS 35/ 7,5 AL UNPERF 2000MM - DIN rail, unperforated

0801704

<https://www.phoenixcontact.com/us/products/0801704>



DIN rail, unperforated, acc. to EN 60715, material: Aluminum, uncoated, Standard profile, color: silver, Pack of 25 (50 m)

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## NS 35/ 7,5 ZN PERF 2000MM - DIN rail perforated

1206421

<https://www.phoenixcontact.com/us/products/1206421>



DIN rail perforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

---

## NS 35/ 7,5 ZN UNPERF 2000MM - DIN rail, unperforated

1206434

<https://www.phoenixcontact.com/us/products/1206434>



DIN rail, unperforated, acc. to EN 60715, material: Steel, galvanized, Standard profile, color: silver, Pack of 25 (50 m)

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## NS 35/ 7,5 CU UNPERF 2000MM-VPE 10 - DIN rail, unperforated

0801762

<https://www.phoenixcontact.com/us/products/0801762>



DIN rail, unperforated, acc. to EN 60715, material: Copper, uncoated, Standard profile, color: copper-colored, Pack of 10 (20 m)

---

## NS 35/ 7,5 CAP - End cap

1206560

<https://www.phoenixcontact.com/us/products/1206560>

DIN rail end piece, for DIN rail NS 35/7.5



# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## CLIPFIX 35 - End clamp

3022218

<https://www.phoenixcontact.com/us/products/3022218>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, width: 9.5 mm, color: gray

---

## CLIPFIX 35-5 - End clamp

3022276

<https://www.phoenixcontact.com/us/products/3022276>



Quick mounting end clamp for NS 35/7,5 DIN rail or NS 35/15 DIN rail, with marking option, with parking option for FBS...5, FBS...6, KSS 5, KSS 6, width: 5.15 mm, color: gray

# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## E/NS 35 N - End clamp

0800886

<https://www.phoenixcontact.com/us/products/0800886>

End clamp, width: 9.5 mm, color: gray



---

## E/UK - End clamp

1201442

<https://www.phoenixcontact.com/us/products/1201442>

End clamp, material: PA, color: gray, Mounting on a DIN rail NS 32 or NS 35



# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>

## E/UK 1 - End clamp

1201413

<https://www.phoenixcontact.com/us/products/1201413>



End clamps, for supporting the ends of double-level and three-level terminal blocks, width: 10 mm, color: gray

---

## MPS-MT - Test plugs

0201744

<https://www.phoenixcontact.com/us/products/0201744>



Test plugs, with solder connection up to 1 mm<sup>2</sup> conductor cross section, number of positions: 1, color: gray

# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## MPS-IH WH - Insulating sleeve

0201663

<https://www.phoenixcontact.com/us/products/0201663>

Insulating sleeve, color: white



---

## MPS-IH RD - Insulating sleeve

0201676

<https://www.phoenixcontact.com/us/products/0201676>

Insulating sleeve, color: red





# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## MPS-IH BU - Insulating sleeve

0201689

<https://www.phoenixcontact.com/us/products/0201689>

Insulating sleeve, color: blue



---

## MPS-IH YE - Insulating sleeve

0201692

<https://www.phoenixcontact.com/us/products/0201692>

Insulating sleeve, color: yellow



# PTRVB 4-FI /GY - Potential distributors



3270138

<https://www.phoenixcontact.com/us/products/3270138>

## MPS-IH GN - Insulating sleeve

0201702

<https://www.phoenixcontact.com/us/products/0201702>

Insulating sleeve, color: green



---

## MPS-IH GY - Insulating sleeve

0201728

<https://www.phoenixcontact.com/us/products/0201728>

Insulating sleeve, color: gray



# PTRVB 4-FI /GY - Potential distributors

3270138

<https://www.phoenixcontact.com/us/products/3270138>



## MPS-IH BK - Insulating sleeve

0201731

<https://www.phoenixcontact.com/us/products/0201731>

Insulating sleeve, color: black



---

Phoenix Contact 2023 © - all rights reserved

<https://www.phoenixcontact.com>

Phoenix Contact USA  
586 Fulling Mill Road  
Middletown, PA 17057, United States  
(+717) 944-1300  
[info@phoenixcon.com](mailto:info@phoenixcon.com)