

MATING FIGURE

- NOTES
1. LEAD CO-PLANARITY SHALL BE 0.1mmMAX.
  2. PER REEL : 5000 COMPONENTS.
  3. THE DIMENSIONS IN PARENTHESSES ARE FOR REFERENCE.
  4. REFER TO JIS 0806.(PACKING OF COMPONENTS FOR AUTO HANDLING)
  5. DO NOT MOUNT ANY OTHER COMPONENTS TO THE INDICATED AREA WHEN USING OUR RECOMMENDED TOOL.
  6. LOCATION OF THE CONNECTOR AND RECOMMENDED PCB LAYOUT ARE ALIGNED WITH THOSE CENTERS.


RECOMMENDED METAL MASK

THICKNESS 0.1mm  
 OPENING RATIO 100% (LEAD PAD)  
 100% (GND PAD)

NO.	MATERIAL	FINISH . REMARKS	NO.	MATERIAL	FINISH . REMARKS
1	PHOSPHOR BRONZE	LEAD AREA : Au PLATING 0.05μmMIN UNDER PLATING : Ni PLATING 1μmMIN	3	PHOSPHOR BRONZE	WHOLE AREA : Sn PLATING 1μmMIN UNDER PLATING : Cu PLATING 0.3μmMIN
2	LCP	UL94V-0-BLACK	4	PS	CLEAR
			5	POLYESTER	CLEAR
			6	PS	BLACK

UNITS	SCALE	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	FREE					

<p>HIROSE ELECTRIC CO., LTD.</p>	<p>APPROVED : MH. YAMANE                  CHECKED : TS. SAKATA                  DESIGNED : AH. MIYAZAKI                  DRAWN : AH. MIYAZAKI</p>	<p>13.06.17                  13.06.14                  13.06.14                  13.06.14</p>	<p>DRAWING NO. EDC3-352647-01                  PART NO. DF56C-50S-0.3V(51)                  CODE CL662-5624-9-51</p>
----------------------------------	---	---	--

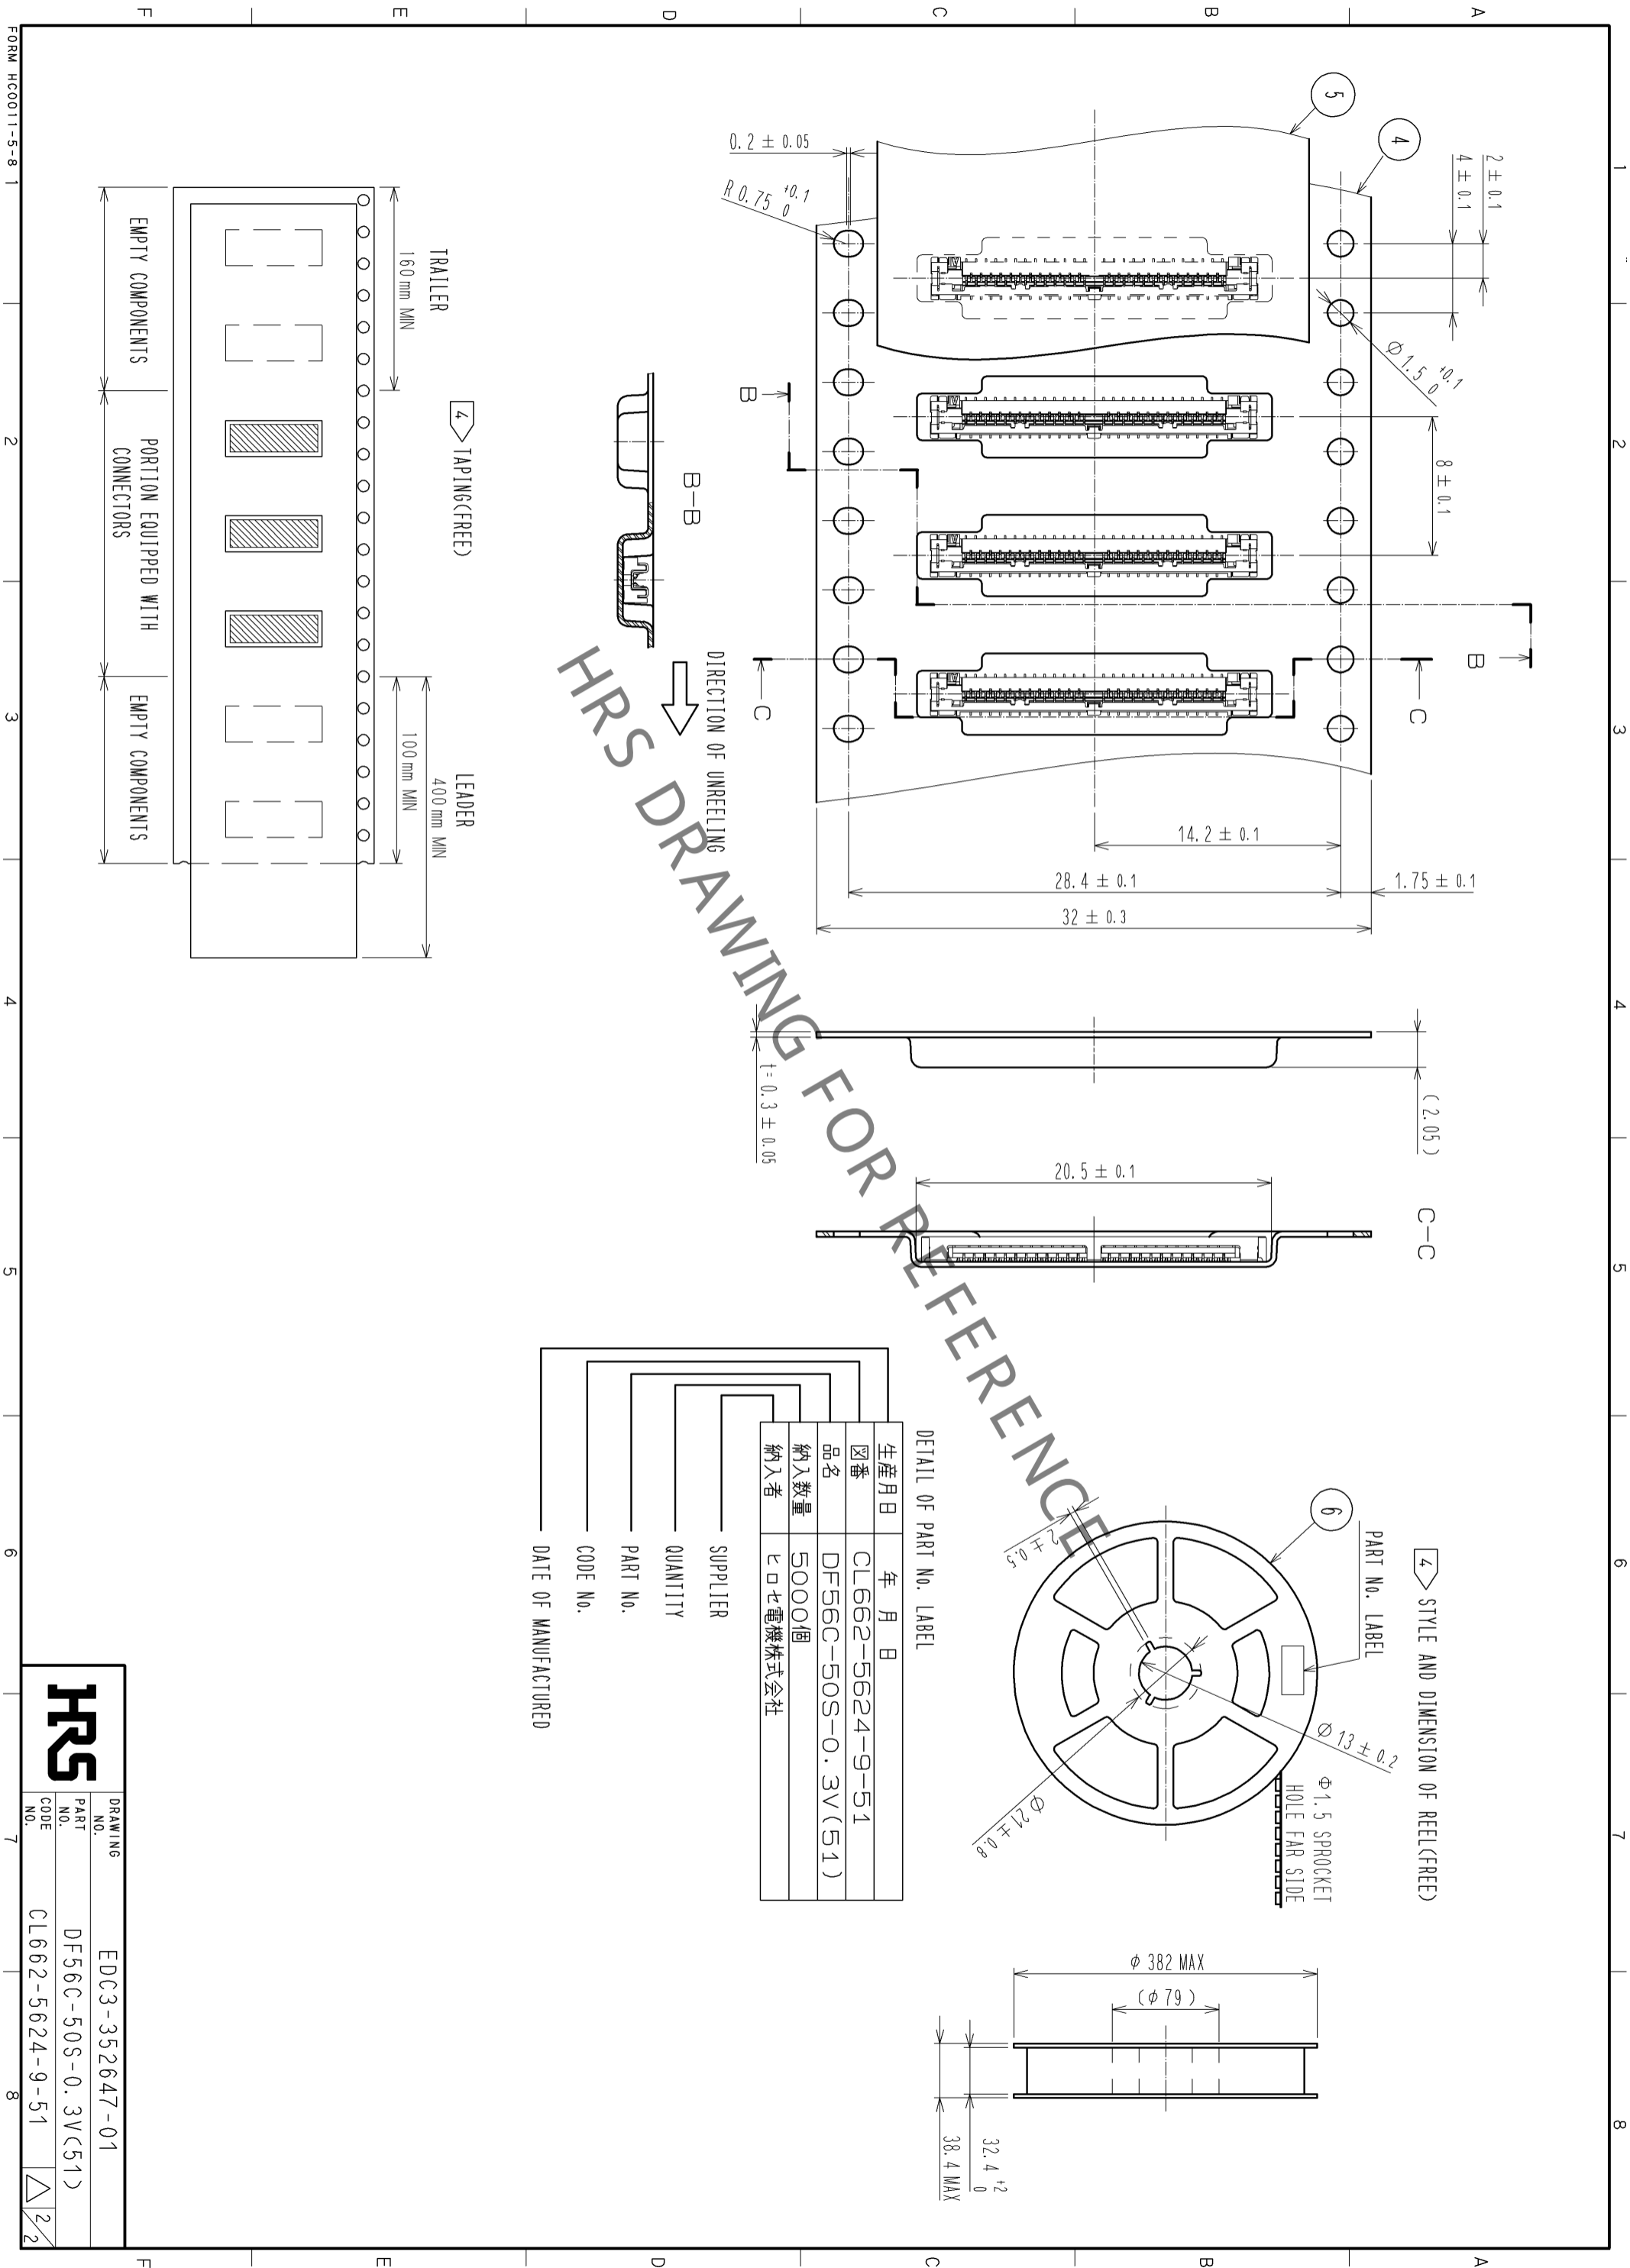

HRS DRAWING FOR REFERENCE

DETAIL OF PART NO. LABEL

生産月日	年月日
図番	CL662-5624-9-51
品名	DF56C-50S-0.3V(51)
納入数量	5000個
納入者	ヒロセ電機株式会社

SUPPLIER \_\_\_\_\_  
 QUANTITY \_\_\_\_\_  
 PART No. \_\_\_\_\_  
 CODE No. \_\_\_\_\_  
 DATE OF MANUFACTURED \_\_\_\_\_

**HRS**

DRAWING NO.	EDC3-352647-01
PART NO.	DF56C-50S-0.3V(51)
CODE NO.	CL662-5624-9-51

2/2

FORM HC0011-5-8 1 2 3 4 5 6 7 8