

Customer Information Sheet

DRAWING No.: M80-FB1XX68F2-XXXXL



IF IN DOUBT - ASK

©


NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

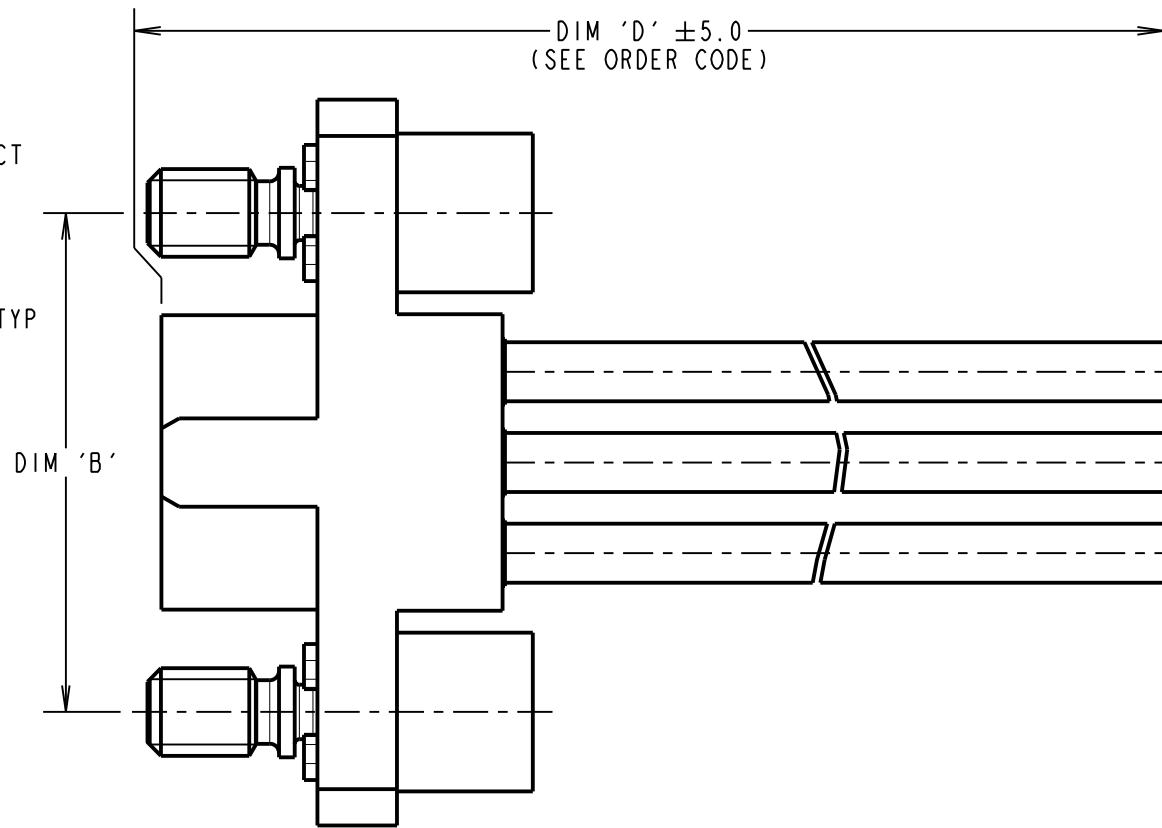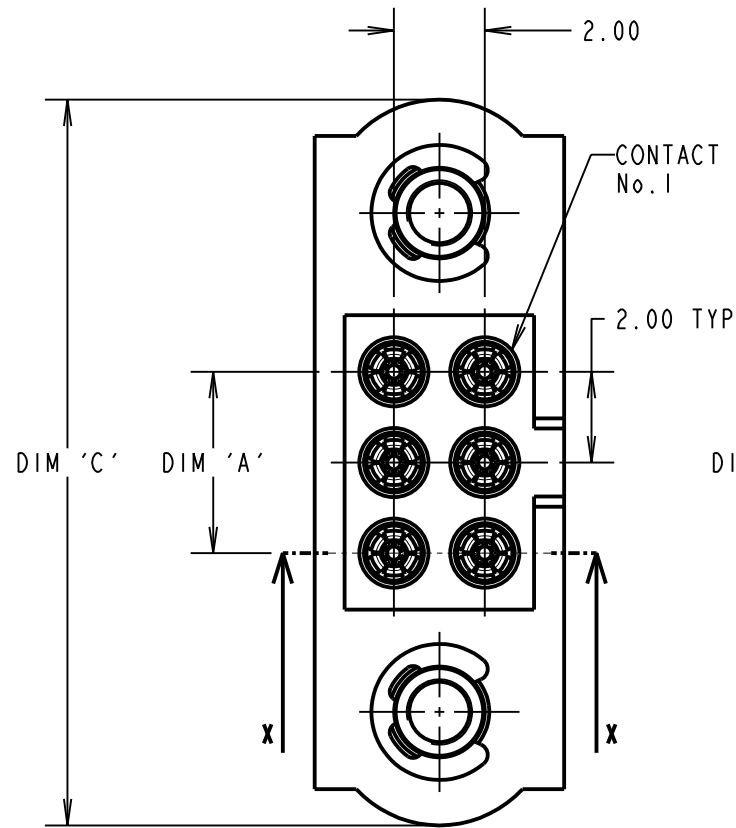


FEMALE MOULDING (1-OFF):
SEE ORDER CODE FOR
TOTAL No. OF CONTACTS

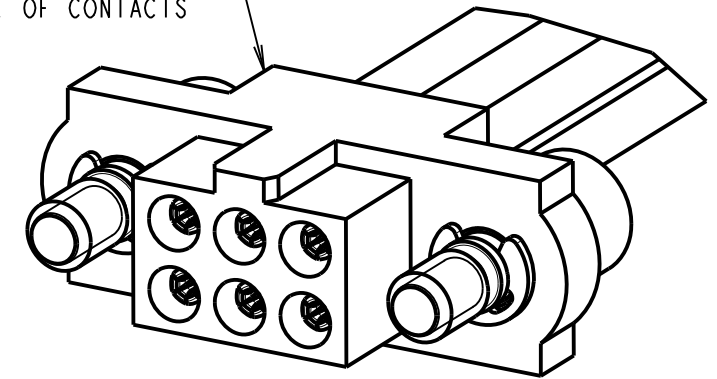

ENDS AS CUT

PTFE WIRE: 22AWG
IN ACCORDANCE WITH COMPONENT
SPECIFICATION C049XX

SECTION X-X

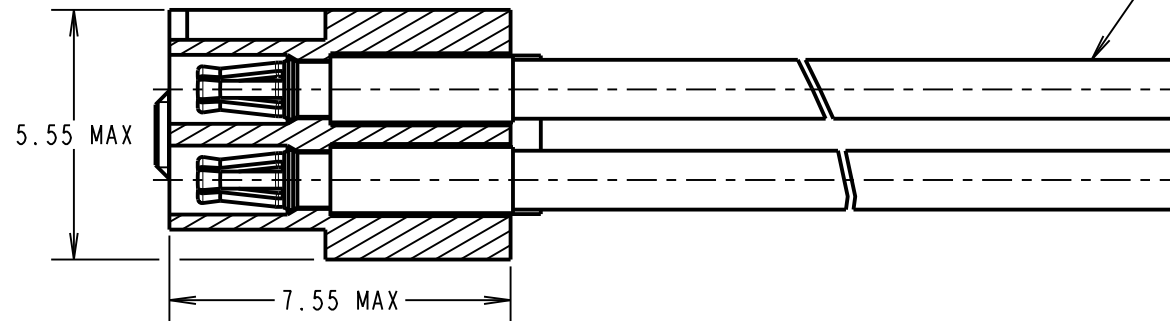

CONTACT No.	WIRE COLOUR
1	BLACK
2	BROWN
3	RED
4	ORANGE
5	YELLOW
6	GREEN
7	BLUE
8	VIOLET
9	GREY
10	WHITE

WIRE COLOURS REPEAT IN ABOVE
ORDER FOR ASSEMBLIES OVER 10 CONTACTS

- NOTES:
- CABLE ASSEMBLIES WILL BE PACKED IN BAGS OF 10.
 - FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C005XX (LATEST ISSUE) AND C049XX (LATEST ISSUE).

DIMENSION	MEASUREMENT
DIM 'A'	TOTAL No. OF CONTACTS - 2.00
DIM 'B'	TOTAL No. OF CONTACTS + 5.00
DIM 'C'	TOTAL No. OF CONTACTS + 10.0

EXAMPLE PART No. :
10 CONTACT CONNECTOR WITH 150mm OF 22AWG WIRE =
M80-FB11068F2-0150L
50 CONTACT CONNECTOR WITH 450mm OF 22AWG WIRE =
M80-FB15068F2-0450L

ORDER CODE:

M80-FB1XX68F2-XXXXL

TOTAL No. OF CONTACTS:
06, 10, 14, 20, 26,
34, 42, 50.

DIM 'D' LENGTH:
0060 = 60mm MIN
9999 = 9999mm MAX
(SEE TABLE FOR EXAMPLES)

STOCKED CABLE LENGTHS:
0150 = 150mm
0300 = 300mm
0450 = 450mm

RTP	2	17.06.18	21516
NAME	ISS.	DATE	C/NOTE
APPROVED: R.PORTLOCK			
CHECKED: S.FLOWER			
DRAWN: R.PORTLOCK			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY
INFORMATION OR DESCRIPTIVE
MATTER SET OUT HEREON ARE
CONFIDENTIAL AND COPYRIGHT
PROPERTY OF THE HARWIN
GROUP AND MUST NOT BE
DISCLOSED, LOANED, COPIED
OR USED FOR MANUFACTURING,
TENDERING OR FOR ANY
OTHER PURPOSE WITHOUT
THEIR WRITTEN PERMISSION.

TOLERANCES
X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:
SEE ABOVE
FINISH: SEE ABOVE
S/AREA: mm²

TITLE: M80 FEMALE T-CONTACT
SINGLE-ENDED CABLE
ASSEMBLY WITH JACKSCREWS

DRAWING NUMBER:
M80-FB1XX68F2-XXXXL

SHT
2
OF 2