




213806
MB-R-715-B5
Machine lighting, semicircle

- Extended temperature range -20 .. +50 °C
- 3 mm safety glass with opal-white glare reduction
- M12 plug connector for easy wiring
- Industrial quality due to IP 67
- Homogeneous light distribution
- Pleasant, neutral white light

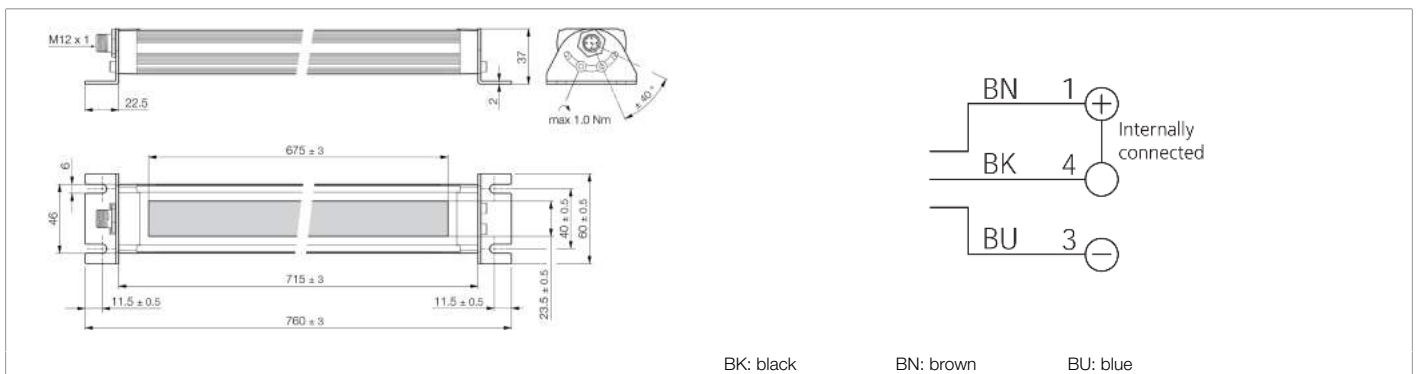

Function											

Technical data (typ.)	+20°C, 24 V DC
Service voltage	24 V DC (± 10%)
Internal power consumption	1.000 mA (24 V DC)
Power	24,0 W (24 V)
Inverse polarity protection	Yes
Illuminated area	675 x 23,5 mm
Housing material	Aluminum (natural, Anodized)
Material	Tempered safety glass, diffuse (Diffusor)
Weight	1.030 g
Protection class	III, operation on protective low voltage
Risk group (DIN EN 62471)	Free group
Model	Machine lighting, semicircle
Service life	> 50.000 h (L70/B10)
Product series	MB-R
Color	White (5 000 K)
Deflection angle FWHM	106° (typ.)
Luminous flux	1.560 lm
Light yield	58 lm/W
Color rendering index Ra	> 80
Light intensity	<ul style="list-style-type: none"> ■ 4150 Lux (250,0 mm) ■ 1540 Lux (500,0 mm) ■ 480 Lux (1000,0 mm) ■ 220 Lux (1500,0 mm) ■ 145 Lux (2000,0 mm)
Shock/vibration load	30 g, 11 ms / 10 ... 55 Hz, 1,0 mm
Ambient temperature during operation	-20 ... +50 °C
Protection type	IP 67



213806

MB-R-715-B5

Machine lighting, semicircle

Technical data (typ.)

Connection

+20°C, 24 V DC

Connector, M12, 5-pin (A-coded)

More information / accessories

<https://www.di-soric.com/213806>