

100/1000 Gigabit Base-T Single Port PoE++ LAN Filter AGSC-2424PPI

- PoE++ application with 1400mA maximum current when combining two pairs, approximately 75W
- Designed to meet IEEE802.3bt
- LL: 0.5μH Max @ 100KHz, 200mV
- Operating Temperature Range: -40°C to +85°C



Electrical Specifications @ 25°C

OCL(μH Min) @ 100kHz, 200mV With 8mA DC Bias	Turns Ratio chip: cable (±5%)	DCR (Ω Max)	Insertion Loss (dB Max)	Return Loss (dB Min)		
				0.3-30MHz	40MHz	50-80MHz
350	1CT:1CT	1.1	-1.2	-16	-13.5	-10


Electrical Specifications @ 25°C

Common Mode Rejection (dB Min)			Cross Talk (dB Min)		HI-POT Isolation (Vrms)
30MHz	60MHz	80-100MHz	0.3-30MHz	60-100MHz	
-40	-35	-30	-35	-30	1500

All specifications subject to change without notice.

MECHANICAL

Dimensions: inch (mm)

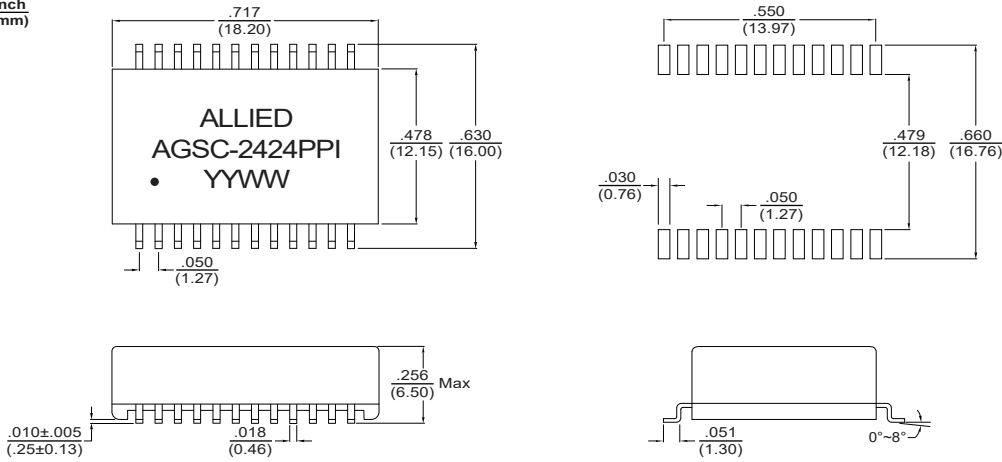

SCHEMATICS

Unless otherwise specified, all tolerances are ±0.25(0.010)

