

US-Lasers: 808nm-5mW - Infrared Laser Diode and Infrared Diode Laser Module

Links to Laser Diode & Laser Module Configurations and Specifications
 >>>>>>>>>

[Laser Diode](#)

[Laser Diode Module](#)

[Micro Laser Module](#)

[Variable Output Laser Diode Module](#)

[N808-5](#)

[NM808-5](#)

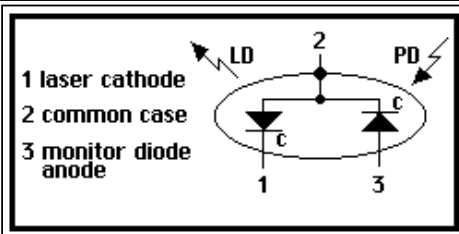
[MM808-5](#)

DATA SHEETS MM808nm 5mWIR LASER MODULE & DIODE

Barrel Specs: <ul style="list-style-type: none"> ● 2 Pieces ● 12 - 56 Thread Size ● Dia: 6.4mm ● Length: 17mm 	Weight & Wire Lengths: <ul style="list-style-type: none"> ● Module with 6" wire leads - 49 grain wt.b ● Module without 6" wire leads - 42 grain wt ● Module with spring leads - 42 1/2 grain wt. ● Spring 2.4mm dia. 4mm long (trimmable) 	Lens Housing Specs: <ul style="list-style-type: none"> ● 12 - 56 Thread Size ● 3.0mm Aperture ● 4.0mm Plastic Lens
--	--	--

IR LASER DIODE DATA SHEET

ABSOLUTE MAXIMUM RATINGS - (Tc=25 °C)

TECHNICAL DATA IR light output 808nm Optical power output 5mW CW Package Type 5.6mm Built-in photo diode for monitoring laser output	 <p>Pin Out Diagram</p>
--	---

Items	Symbols	Values	Unit
Optical output power	Po	5	mW
Laser diode reverse voltage	V	2	V
Photo diode reverse voltage	V	30	V
Operating temperature	Topr	-10 ~ +45	°C
Storage temperature	Tstg	-40 ~ +85	°C

OPTICAL and ELECTRICAL CHARACTERISTICS - (Tc=25 °C)

Items	Symbols	Min.	Typ.	Max.	Unit	Test Condition
Optical output power	Po	-	5	-	mW	-
Threshold current	Ith	-	25	40	mA	-
Operating current	Iop	-	35	50	mA	Po=5mW
Operating voltage	Vop	-	2.5	-	V	Po=5mW
Lasing wavelength		803	808	813	nm	Po=5mW
Beam divergence		-	5	11	deg	Po=5mW
Beam divergence		-	25	37	deg	Po=5mW
Monitor current	Im	-	10	20	uA	Po=5mW
Astigmatism	As	-	5	-	um	Po=5mW
MTTF			3-5,000 hrs.			Po=5mW
Emitter Size	10 x 60 Microns - Emitter Distance to Cap Lens = 0.3mm					
Structure	Index Guided					