




## SPC-16-10-SS

Ruland SPC-16-10-SS, 1" x 5/8" Rigid Coupling, 303 Stainless Steel, Two-Piece Clamp Style With Keyway, 1 3/4" OD, 3" Length

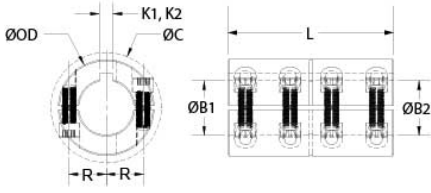

### Description

Ruland SPC-16-10-SS is a two-piece rigid coupling with 1.0000" x 0.6250" bores, 1 3/4" OD, 3" length, and 1/4" x 3/16" keyways. SPC-16-10-SS has opposing hardware for a balanced design. Proprietary Nypatch® anti-vibration coating on hardware allows for even seating of the screw, repeated screw installations, prevents galling, and maintains high holding power. It eliminates the need to treat screws upon receipt greatly reducing installation time. Forged screws test beyond ANSI standards to ensure maximum holding power. Tightly controlled bore tolerance of +.002"/+.0005" is maintained. SPC-16-10-SS is made from 303 stainless steel with hardware of like material for consistent corrosion resistance. It is machined from solid bar stock that is sourced exclusively from North American mills and is RoHS3 and REACH compliant. SPC-16-10-SS is manufactured in our Marlborough, MA factory under strict controls using proprietary processes.

### Product Specifications

<b>Bore (B1)</b>	1.0000 in	<b>Small Bore (B2)</b>	0.6250 in
<b>Keyway (K1)</b>	1/4 in	<b>Keyway (K2)</b>	3/16 in
<b>B1 Max Shaft Penetration</b>	1.500 in	<b>B2 Max Shaft Penetration</b>	1.500 in
<b>Outer Diameter (OD)</b>	1 3/4 in	<b>Length (L)</b>	3 in
<b>Recommended Gap</b>	0.094 in	<b>Recommended Shaft Tolerance</b>	+0.0000 in / -0.0005 in
<b>Forged Clamp Screw</b>	1/4-28	<b>Screw Material</b>	18-8 300 Series Stainless Steel with <a href="#">Nypatch®</a>
<b>Hex Wrench Size</b>	3/16 in	<b>Screw Finish</b>	Bright
<b>Seating Torque</b>	110 lb-in	<b>Number of Screws</b>	8 ea
<b>Rated Torque</b>	1200 in-lb	<b>Moment of Inertia</b>	0.6884 lb-in <sup>2</sup>
<b>Full Bearing Support Required?</b>	No	<b>Nypatch® Anti-Vibration Hardware?</b>	Yes
<b>Zero-Backlash?</b>	Yes	<b>Balanced Design</b>	Yes
<b>Material Specification</b>	Type 303 Austenitic, Non-Magnetic Bar	<b>Temperature</b>	-40°F to 350°F (-40°C to 176°C)
<b>Finish Specification</b>	Bright, No Plating	<b>Manufacturer</b>	Ruland Manufacturing
<b>Country of Origin</b>	USA	<b>Weight (lbs)</b>	1.460900
<b>UPC</b>	634529040805	<b>Tariff Code</b>	8483.60.8000
<b>UNSPC</b>	31163009		
<b>Note 1</b>	Performance ratings are for guidance only. The user must determine suitability for a particular application.		
<b>Prop 65</b>	⚠️ <b>WARNING</b> This product can expose you to the chemical Nickel (metallic), known to the State of California to cause cancer. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> .		

### Installation Instructions

1. Align the SPC-16-10-SS two-piece rigid coupling on the two shafts to be connected. There should be no misalignment.
2. Tighten the Nypatch® screws in two stages, starting with the inside screws. Using a 3/16 in torque wrench, tighten the inside screws to 55 lb-in which is half the recommended seating torque. Repeat the process for the outside screws, tightening to half the recommended seating torque.
3. Be sure to maintain the gap of 0.094 in between the two halves during installation.
4. Tighten the screws to the full recommended seating torque of 110 lb-in following the same pattern, starting with the inside screws first.
5. For optimum results do not exceed the shaft penetration length of 1.500 in.

