



- Standard DOSA SIP Footprint
- 6.0-14VDC Input
- 0.8-5.5V Outputs
- Through Hole Mounting
- Low 13.97mm Profile
- Non Isolated Output

iAD Series

16A Point of Load Converters

iAD Features and Benefits

Features

- High operating efficiency (up to 94%)
- Constant switching frequency
- Starts with pre-biased output

Benefits

- Reduced system heating
- Easier system filtering
- Supports complex digital systems

Specifications

MODEL		iAD
ITEMS		
Nominal Output Voltage	VDC	0.8 - 5.5V
Input Voltage Range	VDC	6 - 14V
Input Current (max)	A	18A
Output Voltage Tolerance	VDC	N/A
Ripple & Noise (max) (pk-pk)	mV	100
Line Regulation (max)	mV	15
Load Regulation (max)	mV	22
Overload Protection	%	Inception - 28A; Short circuit - auto recovery
Overvoltage Protection	-	N/A
Remote Sense	-	Yes
Remote On / Off	-	Positive or Negative Logic available, see Feature Set
Sequencing	-	Yes, see feature set
Temperature (operating)	°C	-40°C to +125°C
Temperature (storage)	°C	-55°C to +125°C
Humidity (operating)	-	20 - 95% RH Non condensing
Humidity (storage)	-	10 - 95% RH Non condensing
Cooling	-	Convection or forced air
Isolation Voltage	-	none
Vibration (non-operating)	-	5 to 50Hz@0.5g (4.9m/s ²), & 50 to 500Hz@1.5g (14.7m/s ²) per Bellcore TR-EOP-000063-5.4.4
Shock	-	196.1m/s ²
Safety Agency Certifications	-	UL60950 (US and Canada), VDE0805 (IEC60950), CB scheme (IEC60950)
Weight (max)	g	12
Size (LxWxH)	mm	50.8 x 7.9 x 14
Warranty	yrs	3

Model Selector						
Model	Output Voltage (V)	Output Adjust (V)	Output Curr. (A)	Max. Output Power (W)	Efficiency at Full Load (%)	
iAD12016A008V-000-R	0.80 - 5.5	0.80 - 5.5	16	80	94% at 5V	
iAD12016A008V-001-R	0.80 - 5.5	0.80 - 5.5	16	80	94% at 5V	

NB other configurations on request


Feature Set						
Feat. Set	Pos. Logic On/Off	Neg. Logic On/Off	Input Voltage	Seq.	0.13" Pin	0.2" Pin
00*	X		6 - 14V	X	X	
01		X	6 - 14V	X	X	
02	X		6 - 14V		X	
03		X	6 - 14V		X	
04	X		6 - 14V	X		X
05		X	6 - 14V	X		X
06	X		6 - 14V			X
07		X	6 - 14V			X

* Preferred feature set


Model Number Example: iAD12016A008V-001-R

Pinout			
PIN	Function	PIN	Function
1	Vout	6	GND
2	Vout	7	Vin
3	Sense	8	Vin
4	Vout	9	Sequencing
5	GND	10	Trim
		11	On / Off

Outline Drawing iAD Series

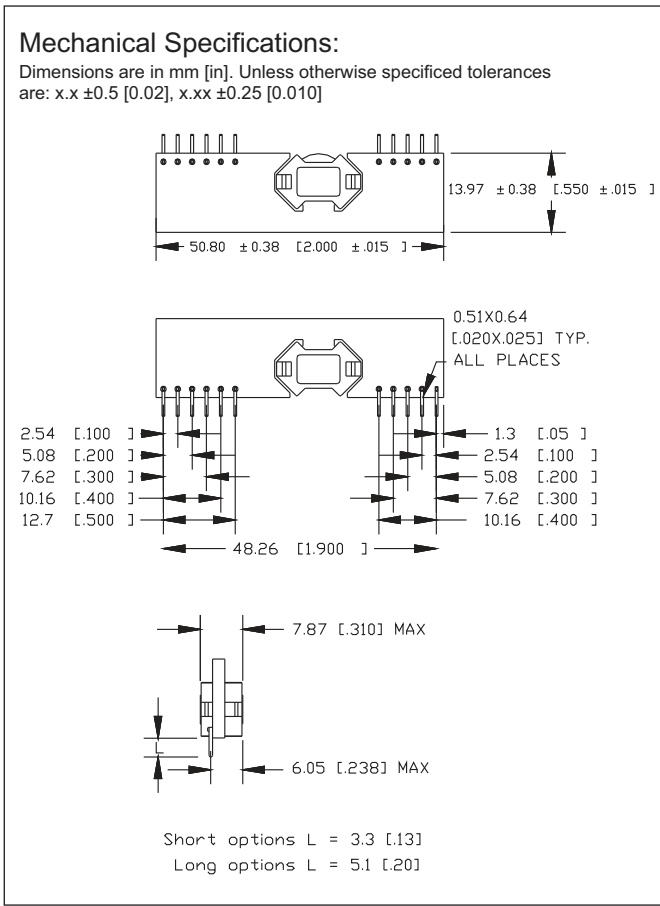

Recommended Hole Pattern (Top View)

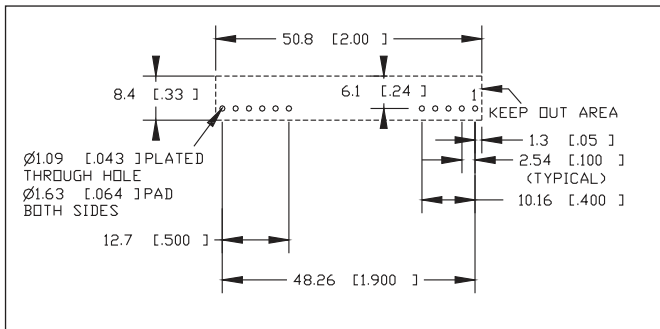

TDK-LAMBDA EMEA

www.emea.tdk-lambda.com



TDK-Lambda France SAS

Route de Grivery
ZAC des Delaches
CS 41077
91978 Courtaboeuf Cedex
France
Tel: +33 1 60 12 71 65
Fax: +33 1 60 12 71 66
france@fr.tdk-lambda.com
www.fr.tdk-lambda.com



Italy Sales Office
Via dei Lavoratori 128/130
20092 Cinisello Balsamo (MI)
Italy
Tel: +39 02 61 29 38 63
Fax: +39 02 61 29 09 00
info.italia@it.tdk-lambda.com
www.it.tdk-lambda.com




TDK-Lambda Germany GmbH

Karl-Bold-Strasse 40
77855 Achern
Germany
Tel: +49 7841 666 0
Fax: +49 7841 5000
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



Austria Sales Office
Aredstrasse 22
2544 Leobersdorf
Austria
Tel: +43 2256 655 84
Fax: +43 2256 645 12
info.germany@de.tdk-lambda.com
www.de.tdk-lambda.com



TDK-Lambda UK Ltd.

Kingsley Avenue
Ilfracombe
Devon EX34 8ES
United Kingdom
Tel: +44 (0) 12 71 85 66 66
Fax: +44 (0) 12 71 86 48 94
powersolutions@uk.tdk-lambda.com
www.uk.tdk-lambda.com



Nemic Lambda Ltd.

Kibbutz
Givat Hashlosha 48800
Israel
Tel: +9 723 902 4333
Fax: +9 723 902 4777
info@nemic.co.il
www.nemic.co.il



Russia

Technical Support:
St Petersburg
Tel: +7 (812) 6580463
Sales:
Moscow
Tel: +7 (499) 7557732
info@tdk-lambda.ru
www.tdk-lambda.ru

LOCAL DISTRIBUTION

