


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION - N/A .
 © COPYRIGHT N/A BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
DF	S0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		B		REV PER ECO-05-002595	07-05	AA	DE

PART NO	A	B	REMARKS
867876-1	28.00 [711.2]	.38 [9.6]	△2
867876-2	90.00 [2286.0]	.38 [9.6]	△2
5-867876-1	28.00 [711.2]	.38 [9.6]	△6

1. MARKED PER MIL-STD-130.
- △2 PIGTAIL IS SOLDER DIPPED.
3. TO MATE WITH AMP LGH-1 RCPT., WITH .88 [22.3] BARREL DEPTH.
4. OPERATING VOLTAGE: 20 KVDC AT SEA LEVEL THRU 70,000 FEET, -55°C THRU +125°C.
- △5 TOLERANCE OF LEAD LENGTH:
UP TO 24 INCHES [609.6] = ±.12 [±3.0]
24 INCHES [609.6] & UP = ±1%
- △6 INSULATION CUT, BUT NOT REMOVED.

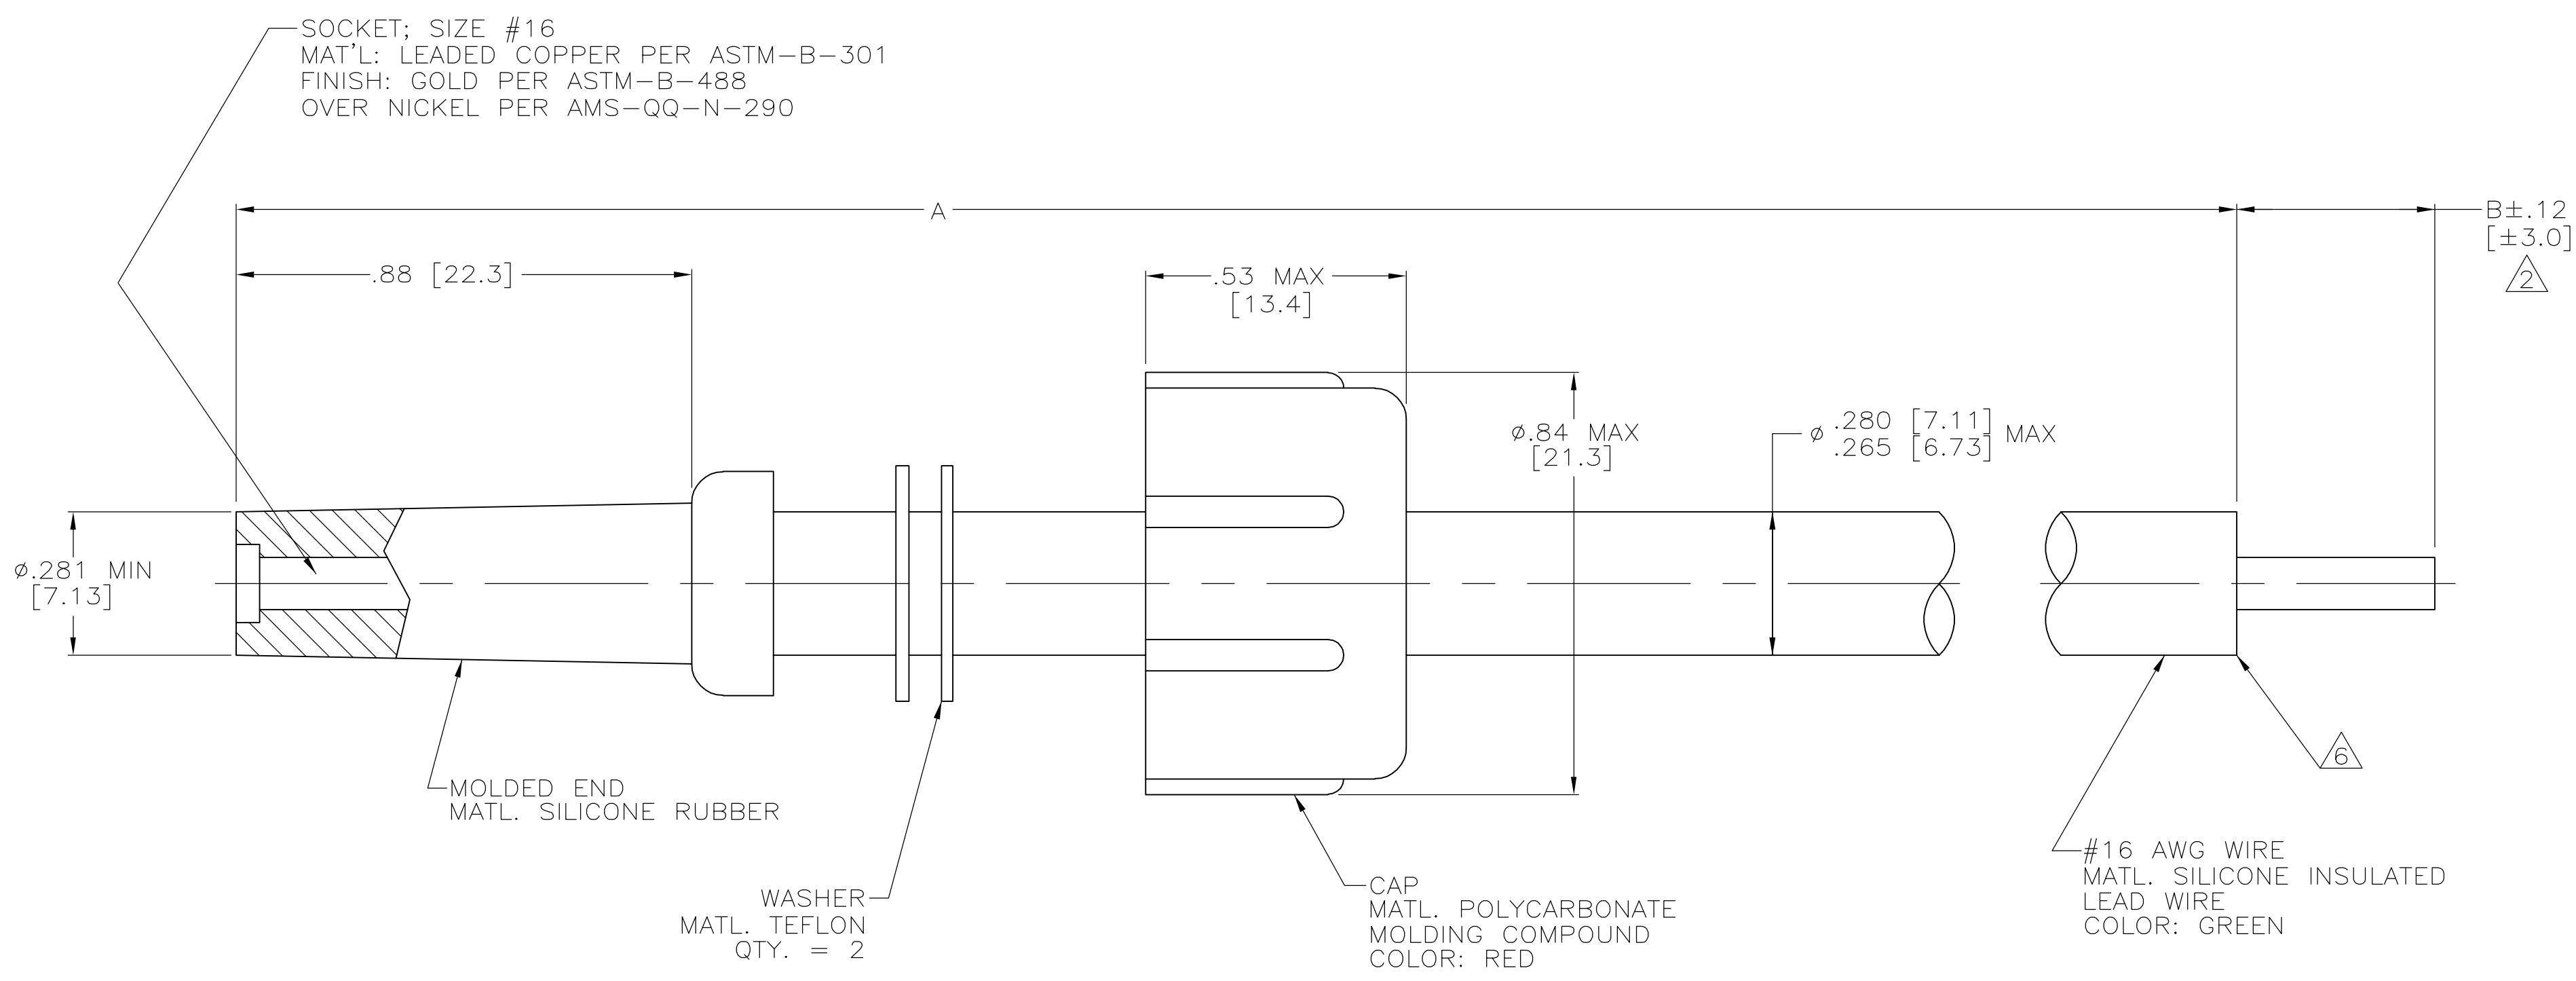

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN C.C.THOMAS 08-JUN-92	tyco Electronics	Tyco Electronics Corporation Harrisburg, Pa 17105-3608	
DIMENSIONS: INCHES [mm]		CHK C.SHELLY 08-JUN-92		NAME LEAD ASSY SGL END (GREEN) LGH-1	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD C.SHELLY 08-JUN-92	PRODUCT SPEC		
0 PLC ± -		APPLICATION SPEC			
1 PLC ± -		WEIGHT -			
2 PLC ± .02 [0.5]		SIZE A2			
3 PLC ± -		CAGE CODE 00779			
4 PLC ± -		DRAWING NO C=867876			
ANGLES ± -		RESTRICTED TO -			
FINISH -		SCALE 4:1 SHEET 1 OF 1 REV B			
CUSTOMER DRAWING					