



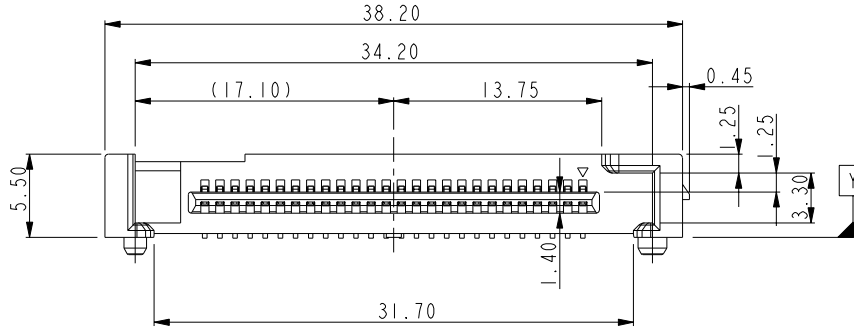


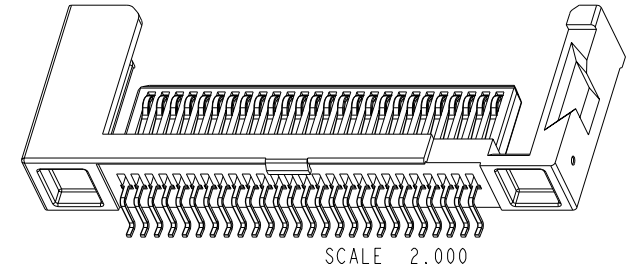


Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de c FCI. Droits de reproduction FCI.

All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

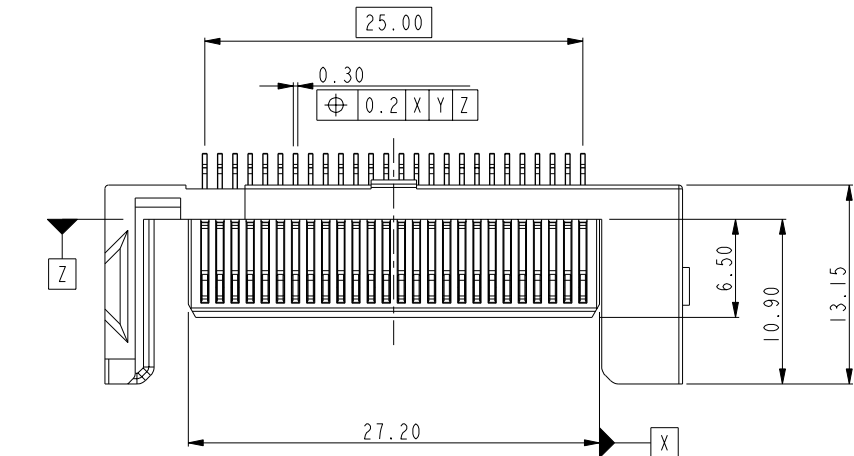

SCALE 2.000

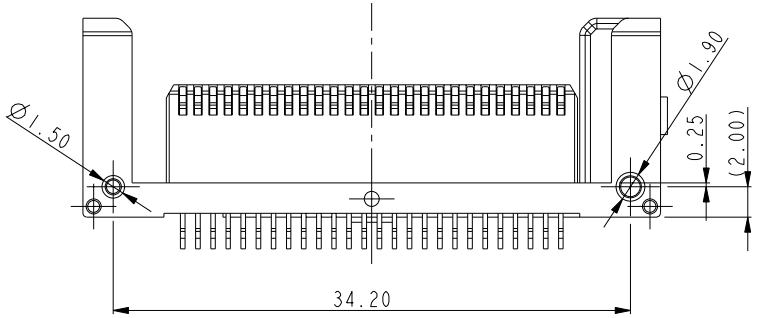

tolerance unless otherwise specified	
linear	.X ± .5
	.XX ± .30
angles	0° ± 2°


rev	ecn no	dr	date
A	T05-0186	TAI	08/31/05
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		<input checked="" type="checkbox"/> tolerance ASME Y14.5	projection	<input checked="" type="checkbox"/> MM
Dr	KENNY TAI	04/08/05	Product family	size A4
Eng	KENNY TAI	04/08/05	Spec ref *	Scale 1.000
Chr	KENNY TAI	04/08/05	Material SEE NOTES	ECN T05-0186
Appr	PAUL WANG	04/08/05		
title BELOW MOUNT, 0 STAND-OFF EXPRESSCARD HOST CONNECTOR			dwg no 10055262	Rev. A
catalog no 10055262		CUSTOMER	sheet 1 of 2	

Tous droits strictement reserves. Reproduction ou communication a des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriete de c FCI. Droits de reproduction FCI.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI. Copyright FCI.

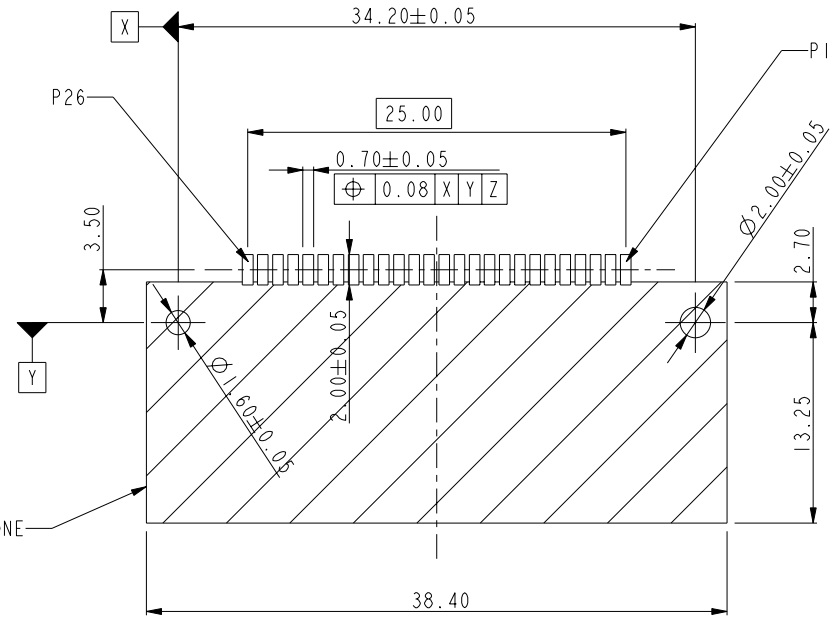

NOTES :

1. MATERIAL:
HOUSING: HIGH TEMEPRATURE THERMOPLASTIC,
UL 94 V-0 FLAME RETARDANT.
TERMINAL: COPPER ALLOY.
PLATING SPEC. AS BELOW :
Ni 50u" UNDER PLATED.
Au OR GXT 30u" OVER CONTACT AREA. (ONE SIDE)
Tin 120u" OVER SOLDERING AREA.
2. PACKING SPEC. GS-14-924.
3. PRODUCT PERFORMANCE PER SPEC. GS-12-285.
4. PART NUMBER SCHEME: (EX. 10055262-100BBSLF)
10055262-X XX X X XLF (LEAD FREE)

RECOMMENDED PCB LAYOUT
(VIEW FROM MOUNTING SIDE)

SCALE 2.000

SPEC.	OPTION (CODE)		
PACKING	TRAY (S)	TAPE & REEL (T)	TUBE (P)
HSG COLOR	BLACK (B)	NATURE (N)	
MOUNT SIDE	BELOW (B)		
STAND-OFF	0 (00)		
PLATING	GOLD (1)	GXT (2)	

5. RoHS COMPATIBLE PRODUCT SPECIFICATIONS

- a-PLATING:
- "LF" MEANS THE PRODUCT IS LEAD-FREE, 2micro-meter MINIMUM MATTE TIN OVER 1.27micro-meter MINIMUM NICKEL UNDERPLATE.
- b-MANUFACTURING PROCESS COMPATIBILITY.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C±5°C SOLDER BATH TEMPERATURE FOR 5 SECONDS IN A REFLOW SOLDER APPLICATION WITH A 1.6mm MIN THICK CIRCUIT BOARD.

title	BELOW MOUNT, 0 STAND-OFF EXPRESSCARD HOST CONNECTOR	dwg no	10055262	Rev.	A
catalog no	10055262	CUSTOMER	sheet 2 of 2		