

16,6 ±0,25

Surface State

±0,25

 $\infty$ 32,

LZYLLOBOY/

ЖE

Right LED

ß


Ę0, 05

က်

G

RoHS COMPLIANT



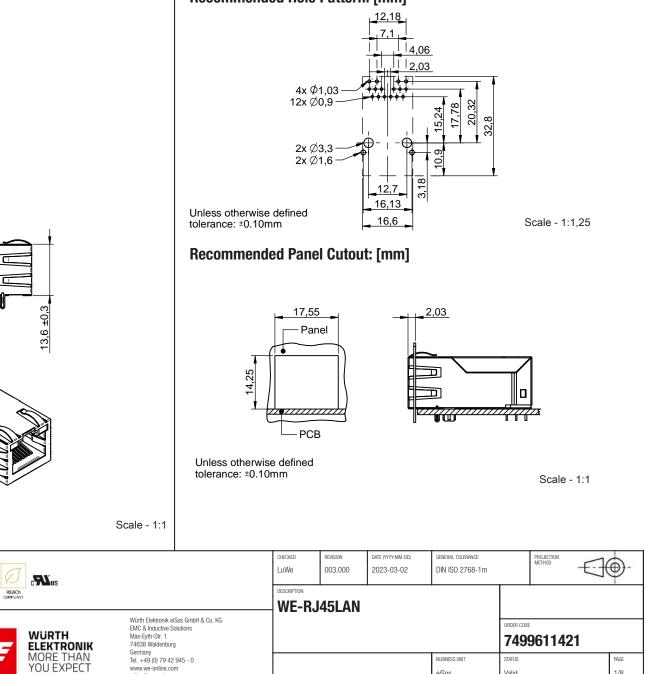

BUSINESS UNIT

eiSos

STATUS

Valid

PAGE

1/8

Unless otherwise defined tolerance: ±0.25mm

Left LED

# **Product Marking:**

Marking	7499611421
Marking - Date Code	YYWW


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricial circuits that reliability and reliability functions or performance.

Tel. +49 (0) 79 42 945 - 0

www.we-online.com

eiSos@we-online.com

**Schematic:** 

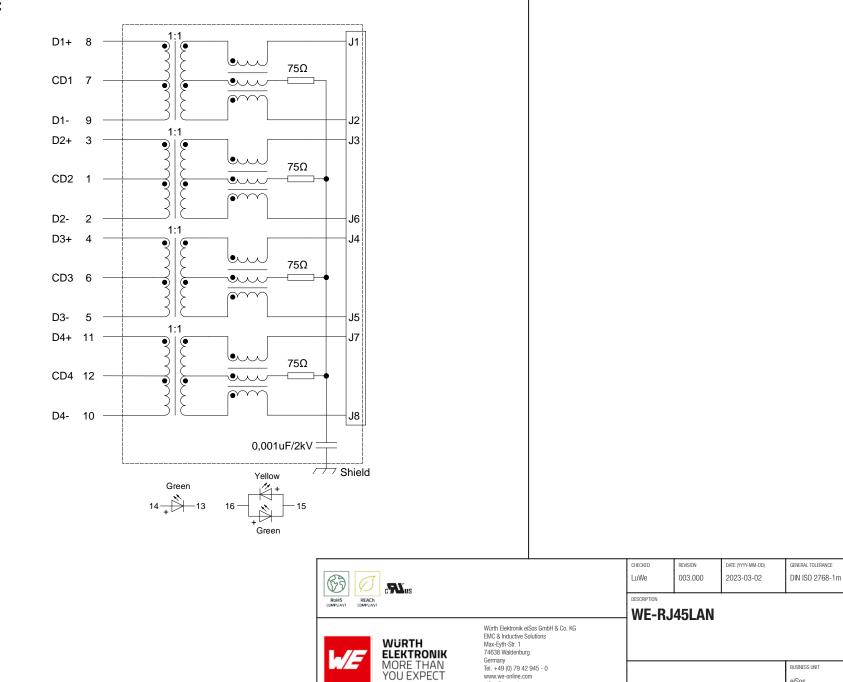

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

eiSos@we-online.com

PROJECTION METHOD

7499611421

ORDER CODE

STATUS

Valid

eiSos

 $\oplus$ 

PAGE

2/8

## **Electrical Properties:**

Properties		Test conditions	Value	Unit	Tol.				
Inductance	L	100 kHz / 100 mV @ 8 mA	110	μH	min.				
Insulation Test Voltage	V <sub>T</sub>	1 min.	2250	V (RMS)					
Insertion Loss	IL	1-250 MHz	-1.5	dB	max.				
Return Loss	RL	1-40 MHz	-18	dB	min.				
Return Loss	RL	40-100 MHz	-13	dB	min.				
Return Loss	RL	100-250 MHz	-11	dB	min.				
Return Loss	RL	250-500 MHz	-8	dB	min.				
Crosstalk	CT	1-100 MHz	-28	dB	min.				
Crosstalk	CT	100-500 MHz	-19	dB	min.				
Common Mode Rejection Ratio	CMRR	1-100 MHz	-35	dB	min.				
Common Mode Rejection Ratio	CMRR	100-250 MHz	-22	dB	min.				
Common Mode Rejection Ratio	CMRR	250-500 MHz	-20	dB	min.				
Turns Ratio	n		1:1		±3%				
Data rate		10GBASE-T							

## **General Information:**

Operating Temperature	0 up to +70 °C
Storage Conditions (in original packaging)	< 40 °C; < 75 % RH
Moisture Sensitivity Level (MSL)	1
Mating Cycle	750
General Information	Compliant with IEEE 802.3an

# **LED Electrical & Optical Properties:**


Properties	Test conditions		Value						
Fropernes			min.	max.	Unit				
Forward Voltage	V <sub>F</sub>	20 mA	1.8	2.4	V				
LED (Left-Right)		yellow/green-green							


# **Certification:**


RoHS Approval	Compliant [2011/65/EU&2015/863]
REACh Approval	Conform or declared [(EC)1907/2006]
cURus Approval	E472316 [UL-62368]

			REVISION 003.000	DATE (YYYY-MM-DD) 2023-03-02	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	=	€-
	REACh COMPLIANT			WE-RJ45LAN					
	Würth Elektronik eiSos GmbH & Co. KG ENC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg Germany					ORDER CODE	961142	21	
MORE THAN YOU EXPECT	Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com				BUSINESS UNIT eiSos	status Valid		1	PAGE 3/8

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for uses in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Warth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the require high safety and reliability functions or performance.

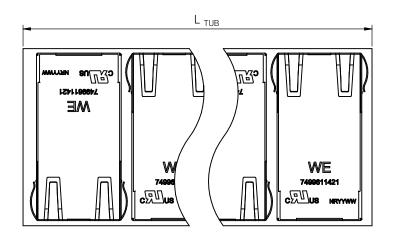




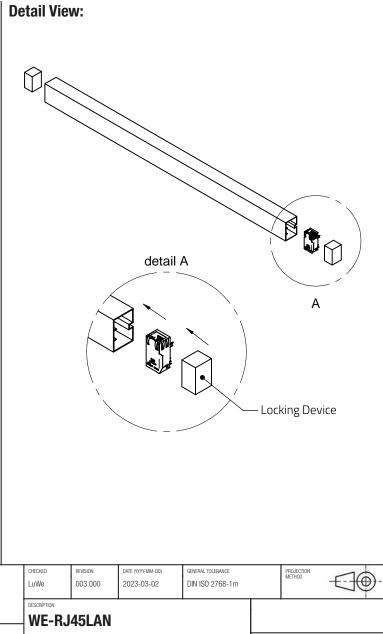

L <sub>TUB</sub> (mm)	W <sub>TUB</sub> (mm)	H <sub>TUB</sub> (mm)	110.01	Packaging Unit	Material
typ.	typ.	typ.	pcs.	pcs.	
530,00	24,70	34,70	2	28	PVC

G **N**us RoHS REACH Würth Elektronik eiSos GmbH & Co. KG ORDER CODE EMC & Inductive Solutions WURTH ELEKTRONIK Max-Eyth-Str. 1 7499611421 74638 Waldenburg Germany MORE THAN YOU EXPECT Tel. +49 (0) 79 42 945 - 0 www.we-online.com STATUS BUSINESS UNIT PAGE 4/8 eiSos Valid eiSos@we-online.com


This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and rel

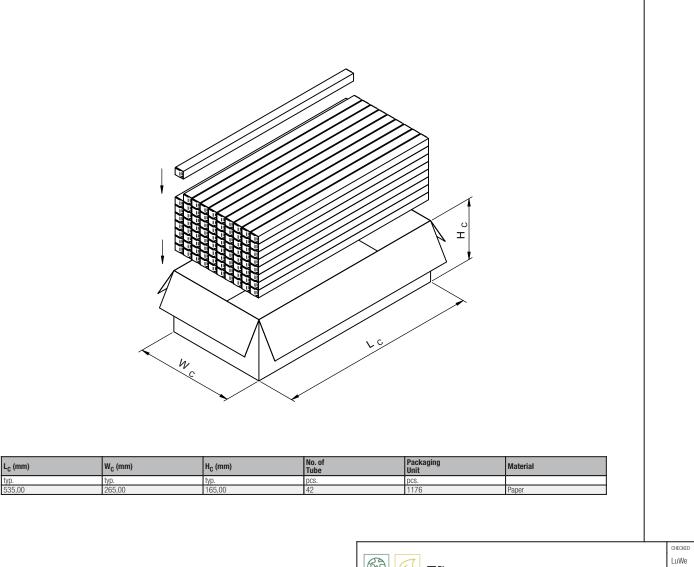

MORE THAN YOU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com etSos@we-online.com				BUSINESS UNIT eiSos	status Valid		page 5/8
	Würth Elektronik elSos GmbH & Co. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Waldenburg					ORDER CODE 749	9611421	
RoHS REACh COMPLIANT COMPLIANT		DESCRIPTION	J45LAN	-				
		LuWe	REVISION 003.000	DATE (YYYY-MM-DD) 2023-03-02	GENERAL TOLERANCE DIN ISO 2768-1m		METHOD	<b>-</b>

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG mout to intended for use informed about the intent of such usage before the design-in stage. In addition, sufficient reliability standard is especially nequired or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runtering in stage and reliability a

## **Classification Wave Soldering Profile:**

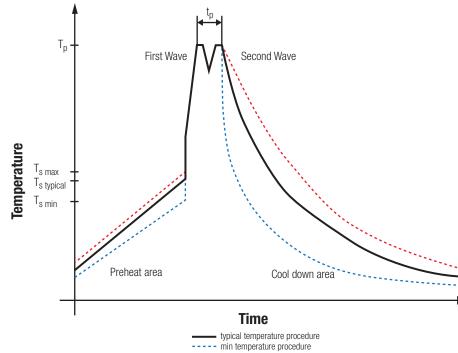

---- max temperature procedure

## **Classification Wave Soldering Profile:**

Profile Feature		Pb-Free Assembly	Sn-Pb Assembly
Preheat Temperature Min	T <sub>s min</sub>	100 °C	100 °C
Preheat Temperature Typical	T <sub>s typical</sub>	120 °C	120 °C
Preheat Temperature Max	T <sub>s max</sub>	130 °C	130 °C
Preheat Time $\rm t_s$ from $\rm T_{smin}$ to $\rm T_{smax}$	t <sub>s</sub>	70 seconds	70 seconds
Ramp-up Rate	ΔT	150 °C max.	150 °C max.
Peak Temperature	Т <sub>р</sub>	250 °C - 260 °C	235 °C - 260 °C
Time of actual peak temperature	tp	max. 10 seconds max. 5 seconds each wave	max. 10 seconds max. 5 seconds each wave
Ramp-down Rate, Min		~ 2 K/ second	~ 2 K/ second
Ramp-down Rate, Typical		~ 3.5 K/ second	~ 3.5 K/ second
Ramp-down Rate, Max		~ 5 K/ second	~ 5 K/ second
Time 25 °C to 25 °C		4 minutes	4 minutes

refer to EN61760-1:2006

	REACH COMPLANT REACH		CHECKED         REVISION         DATE (YYYY MM-D0)         GENERAL TOLERANCE           LuWe         003.000         2023-03-02         DIN ISO 2768-1m				PROJECTION METHOD	$\square$	<b>⊕</b> -		
			WE-RJ45LAN								
			EMC & Inductive Solutions Max-Eyth-Str. 1					ORDER CODE	961142	21	
		MORE THAN YOU EXPECT	earmany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com				BUSINESS UNIT eiSos	status Valid		1	PAGE 6/8

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus the runterioa circuits that must control such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic advicus that must and require high safety and reliability an

## **Cautions and Warnings:**

# The following conditions apply to all goods within the product series of WE-RJ45LAN of Würth Elektronik eiSos GmbH & Co. KG:

#### **General:**

- This electronic component was designed and manufactured for use in general electronic equipment.
- Würth Elektronik must be asked for written approval (following the PPAP procedure) before incorporating the components into any equipment in fields such as military, aerospace, aviation, nuclear control, submarine, transportation (automotive control, train control, ship control), transportation signal, disaster prevention, medical, public information network etc. where higher safety and reliability are especially required and/or if there is the possibility of direct damage or human injury.
- Electronic components that will be used in safety-critical or high-reliability applications, should be pre-evaluated by the customer.
- The component is designed and manufactured to be used within the datasheet specified values. If the usage and operation conditions
  specified in the datasheet are not met, the wire insulation may be damaged or dissolved.
- Do not drop or impact the components, the component may be damaged.
- Würth Elektronik products are qualified according to international standards, which are listed in each product reliability report. Würth Elektronik does not warrent any customer qualified product characteristics beyond Würth Elektroniks' specifications, for its validity and sustainability over time.
- The customer is responsible for the functionality of their own products. All technical specifications for standard products also apply to customer specific products.

#### **Product specific:**

#### Soldering:

- The solder profile must comply with the technical product specifications. All other profiles will void the warranty.
- All other soldering methods are at the customers' own risk.
- Strong forces which may affect the coplanarity of the components' electrical connection with the PCB (i.e. pins), can damage the part, resulting in a void of the warranty.

#### **Cleaning and Washing:**

- Washing agents used during the production to clean the customer application may damage or change the characteristics of the wire
  insulation, marking or plating. Washing agents may have a negative effect on the long-term functionality of the product.
- Using a brush during the cleaning process could break the wire due to its small diameter. Therefore, we do not recommend using a
  brush during the PCB cleaning process.

#### Potting:

If the product is potted in the costumer application, the potting material may shrink or expand during and after hardening. Shrinking
could lead to an incomplete seal, allowing contaminants into the core. Expansion could damage the components. We recommend a
manual inspection after potting to avoid these effects.

#### **Storage Conditions:**

- A storage of Würth Elektronik products for longer than 12 months is not recommended. Within other effects, the terminals may suffer degradation, resulting in bad solderability. Therefore, all products shall be used within the period of 12 months based on the day of shipment.
- Do not expose the components to direct sunlight.
- The storage conditions in the original packaging are defined according to DIN EN 61760-2.
- The storage conditions stated in the original packaging apply to the storage time and not to the transportation time of the components.

#### Packaging

 The packaging specifications apply only to purchase orders comprising whole packaging units. If the ordered quantity exceeds or is lower than the specified packaging unit, packaging in accordance with the packaging specifications cannot be ensured.

#### Handling:

- Violation of the technical product specifications such as exceeding the nominal rated current will void the warranty.
- Applying currents with audio-frequency signals may result in audible noise due to the magnetostrictive material properties.
- The temperature rise of the component must be taken into consideration. The operating temperature is comprised of ambient temperature and temperature rise of the component. The operating temperature of the component shall not exceed the maximum temperature specified.

These cautions and warnings comply with the state of the scientific and technical knowledge and are believed to be accurate and reliable. However, no responsibility is assumed for inaccuracies or incompleteness.

					GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD	$-\Box($	<b>●</b> -	
Wirth Elektronik elSas GmbH & Ca. KG EMC & Inductive Solutions Max-Eyth-Str. 1 74638 Wailenburg		WE-RJ	45LAN			ORDER CODE	961142	21		
	IORE THAN OU EXPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com eiSos@we-online.com				BUSINESS UNIT eiSos	status Valid		1	PAGE 7/8

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intern of such usage before the design-in stage. In addition, sufficient reliability evaluation, transportation, signal, disaster prevention, medical, public information network etc... Würth Elektronik elSos GmbH & Co KG must be informed about the intern of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electricia circuits that and reliability functions or performance.

## **Important Notes**

# The following conditions apply to all goods within the product range of Würth Elektronik eiSos GmbH & Co. KG:

#### **1. General Customer Responsibility**

Some goods within the product range of Würth Elektronik eiSos GmbH & Co. KG contain statements regarding general suitability for certain application areas. These statements about suitability are based on our knowledge and experience of typical requirements concerning the areas, serve as general guidance and cannot be estimated as binding statements about the suitability for a customer application. The responsibility for the applicability and use in a particular customer design is always solely within the authority of the customer. Due to this fact it is up to the customer to evaluate, where appropriate to investigate and decide whether the device with the specific product characteristics described in the product specification is valid and suitable for the respective customer application or not.

#### 2. Customer Responsibility related to Specific, in particular Safety-Relevant Applications

It has to be clearly pointed out that the possibility of a malfunction of electronic components or failure before the end of the usual lifetime cannot be completely eliminated in the current state of the art, even if the products are operated within the range of the specifications. In certain customer applications requiring a very high level of safety and especially in customer applications in which the malfunction or failure of an electronic component could endanger human life or health it must be ensured by most advanced technological aid of suitable design of the customer application that no injury or damage is caused to third parties in the event of malfunction or failure of an electronic component. Therefore, customer is cautioned to verify that data sheets are current before placing orders. The current data sheets can be downloaded at www.we-online.com.

#### 3. Best Care and Attention

Any product-specific notes, cautions and warnings must be strictly observed. Any disregard will result in the loss of warranty.

#### 4. Customer Support for Product Specifications

Some products within the product range may contain substances which are subject to restrictions in certain jurisdictions in order to serve specific technical requirements. Necessary information is available on request. In this case the field sales engineer or the internal sales person in charge should be contacted who will be happy to support in this matter.

#### 5. Product R&D

Due to constant product improvement product specifications may change from time to time. As a standard reporting procedure of the Product Change Notification (PCN) according to the JEDEC-Standard inform about minor and major changes. In case of further queries regarding the PCN, the field sales engineer or the internal sales person in charge should be contacted. The basic responsibility of the customer as per Section 1 and 2 remains unaffected.

#### 6. Product Life Cycle

Due to technical progress and economical evaluation we also reserve the right to discontinue production and delivery of products. As a standard reporting procedure of the Product Termination Notification (PTN) according to the JEDEC-Standard we will inform at an early stage about inevitable product discontinuance. According to this we cannot guarantee that all products within our product range will always be available. Therefore it needs to be verified with the field sales engineer or the internal sales person in charge about the current product availability expectancy before or when the product for application design-in disposal is considered. The approach named above does not apply in the case of individual agreements deviating from the foregoing for customer-specific products.

#### 7. Property Rights

All the rights for contractual products produced by Würth Elektronik eiSos GmbH & Co. KG on the basis of ideas, development contracts as well as models or templates that are subject to copyright, patent or commercial protection supplied to the customer will remain with Würth Elektronik eiSos GmbH & Co. KG does not warrant or represent that any license, either expressed or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, application, or process in which Würth Elektronik eiSos GmbH & Co. KG components or services are used.

#### 8. General Terms and Conditions

Unless otherwise agreed in individual contracts, all orders are subject to the current version of the "General Terms and Conditions of Würth Elektronik eiSos Group", last version available at www.we-online.com.

		CHECKED LuWe	REVISION 003.000	DATE (YYYY-MM-DD) 2023-03-02	GENERAL TOLERANCE DIN ISO 2768-1m		PROJECTION METHOD		<b>-</b>	
RoHS REACH COMPLIANT COMPLIANT	RoHS REACh MPUNAT COMPUNA		WE-RJ45LAN							
ELEKT	Würth Elektronik eiSas GmbH & Co. KG EMC & Inductive Solutions MAE-tyh-Str. 1 74638 Waldenburg						ORDER CODE	9611421		
	THAN XPECT	Germany Tel. +49 (0) 79 42 945 - 0 www.we-online.com elSos@we-online.com				BUSINESS UNIT eiSos	status Valid		- 1	PAGE 8/8

This electronic component has been designed and developed for usage in general electronic equipment only. This product is not authorized for use in equipment where a higher safety standard and reliability standard is especially required or where a failure of the product is reasonably expected to cause severe personal injury or death, unless the parties have executed an agreement specifically governing such use. Moreover Würth Elektronik elSos GmbH & Co KG must be informed about the intent of such usage before the design-in stage. In addition, sufficient reliability evaluation checks for safety must be performed on every electronic component which is used in electronic circuits that require high asteging and reliability functions or performance.